



**Technical features:**

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

**Supplied as standard:**

- 8/9 mm square spindle.

**On request:**

- European profile cylinder.
- Timer item 1.07022.20.0.


**Finishes:**

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

**Hand:**

0 = Non-handed

Type	Description	Facaplate	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.

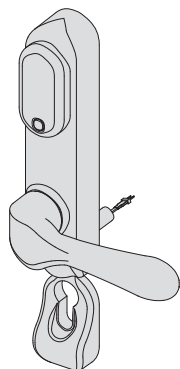


- Electrically enabled handle
- Can be installed with locks series 43100
- Handle to cylinder distance 72 mm
- STANDARD SUPPLY:  
Connecting cable  
fixing screws
- ON REQUEST:  
Timer device 07022.20.0

1,150 1 1 07074 70 0

- Electrically enabled handle (A function only)
- Can be installed with locks series 43225, 43250, 43650, 43670, 43725, 43825
- Handle to cylinder distance 92 mm
- STANDARD SUPPLY:  
Connecting cable  
Fixing screws
- ON REQUEST:  
Timer device 07022.20.0

1,150 1 1 07074 71 0



- Multiple scale timer

0,100 1 1 07022 20 0