



CISA®



Security and access control systems for every type of building

GENERAL CATALOGUE



**Pioneering safety.**

CISA, Costruzioni Italiane Serrature e Affini, was established in Florence in 1926 by Luigi Bucci. The brand soon became a household name, thanks to its patent of the very first electric controlled lock which revolutionised the principle of opening and closing doors and gates. Today CISA is one of the top brands in locking and access control systems and, since December 2013, one of the founders of the international group Allegion, together with leading brands in the security technology sector.

Research and innovation.

CISA offers a constantly evolving range of solutions, thanks to daily commitment to 100% Italian research and development. A significant number of international patents are registered every year to meet the highest regulatory standards.

Specific solutions for all needs.

From private residences to business centres, schools, hospitals and hotels, security is the number one priority for CISA and all its access control and management solutions are designed with this in mind. CISA leads the field in providing answers to all its customers' needs, whatever the environment, with dedicated solutions to prevent unlawful access to any kind of door or entrance. CISA also produces systems which provide safe egress to everyone, even those with reduced mobility, in the event of danger or difficulty.

Someone you can depend on.

CISA operates nationwide and is always on hand to assist security professionals: from security managers to architects, managers of technical departments and apartment building administrators, down to those who take the security of their homes seriously. It provides all round support thanks to its authorised "CISA Solution Partner" centres which provide experience, advice and services with the technology and solidity that has made CISA a household name.

More comfort and design.

CISA designs and manufactures master key systems (where one key opens several doors) for any premises, from individual homes to hospitals, to allow more convenient and economical management of multiple accesses, while still guaranteeing the highest security standards. This system is complemented by an effective system to control key duplication (Security Card). Thanks to its electro-mechanical solutions, accesses can be controlled in real time and credentials easily changed. And CISA also has an eye for design, with product ranges that blend into their surroundings and are available in a variety of colours and models.

Visit cisa.com



Catalogue

Analytic index



Special executions



Key blanks



Cylinders




Padlocks




Locks for steel doors



Locks for aluminium doors




Locks for wooden doors



Locks for armour plated doors




Fire door locks and panic exit devices



Locks and panic exit devices



Door closers




Safes



Keying kits



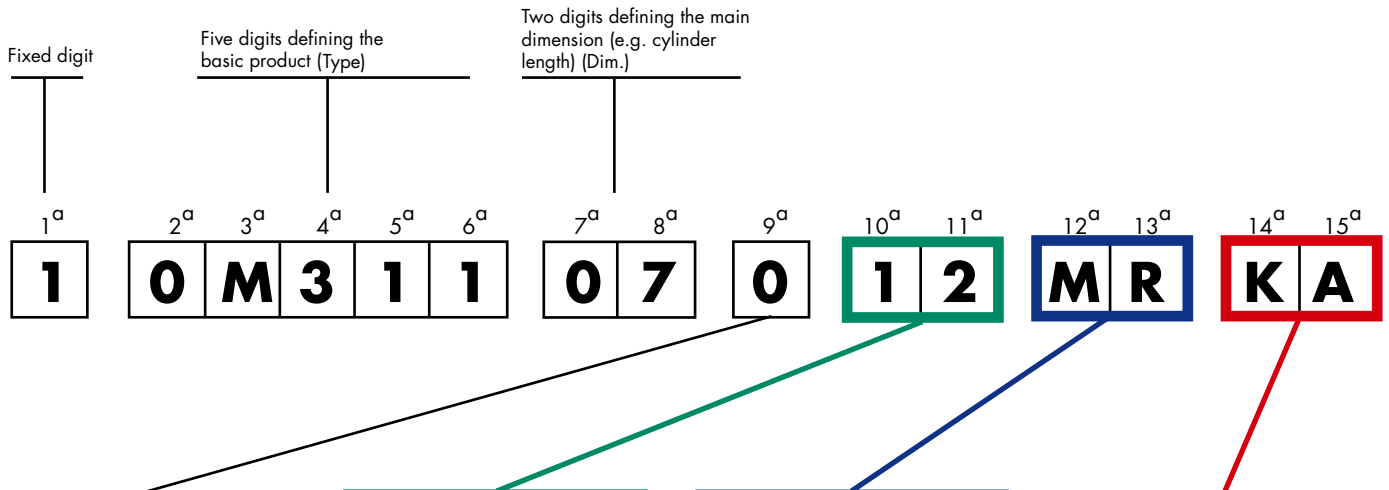

One digit for the hand:

Locks:

- 0 = reversible
- 1 = right hand inwards
- 2 = left hand inwards
- 3 = right hand outwards
- 4 = left hand outwards

Electric striker:

- 0 = reversible
- 1 = right hand inwards
- left hand outwards
- 2 = left hand inwards
- right hand outwards

Panic exit devices

- 0 = reversible
- 1 = right hand outwards
- 2 = left hand outwards

EXAMPLES:

1) When ordering a **basic item** from the list specify the code up to the hand digit. For example, to order a cylinder:

1 | 0M311 | 07 | 0 | | | |

3) When ordering a personalized item, for example a **cylinder with a customer's design feature**, indicate:

1 | 0M311 | 07 | 0 | 00 | MR | |

where MR is to be assigned by CISA

2) When ordering an item with a non-standard finish, for example a **nickel-plated cylinder**, indicate:

1 | 0M311 | 07 | 0 | 12 | | |

4) When ordering a special item, for example a **KA cylinder**, indicate:

1 | 0M311 | 07 | 0 | 00 | MR | KA



CISA®

Analytic index



ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 A0L01 01 0	529	538	2	1 B6785 28 0	379	403	18	1 B7766 28 0	372	403	17	1 0A120 00 0	78		
1 " 01 0 93	529	538	2	1 " 38 0	379	403	18	1 " 38 0	372	403	17	1 0A149 00 0	78		
1 " 01 4	529	538	2	1 " 48 0	379	403	18	1 " 48 0	372	403	17	1 0A150 00 0	77		
1 " 01 4 93	529	538	2	1 " 58 0	379	403	18	1 " 58 0	372	403	17	1 0A155 00 0	78		
1 " 31 0	529	538	2	1 B6786 28 0	379	403	18	1 B7784 28 0	380	403	18	1 0A210 50 0	77	107	7
1 " 31 0 93	529	538	2	1 " 28 B	379	403	18	1 " 38 0	380	403	18	1 0A310 05 0	75	108	17
1 " 31 4	529	538	2	1 " 38 0	379	403	18	1 " 48 0	380	403	18	1 " 06 0	75	108	17
1 " 31 4 93	529	538	2	1 " 38 B	379	403	18	1 " 58 0	380	403	18	1 " 07 0	75	108	17
1 A0L02 01 0	529	538	2	1 " 48 0	379	403	18	1 B7785 28 0	380	403	18	1 " 08 0	75	108	17
1 " 01 0 93	529	538	2	1 " 48 B	379	403	18	1 " 38 0	380	403	18	1 " 09 0	75	108	17
1 " 01 4	529	538	2	1 " 58 0	379	403	18	1 " 48 0	380	403	18	1 " 10 0	75	108	17
1 " 01 4 93	529	538	2	1 " 58 B	379	403	18	1 " 58 0	380	403	18	1 " 11 0	75	108	17
1 " 31 0	529	538	2	1 B7409 30 1	534			1 B7786 28 0	380	403	18	1 " 12 0	75	108	17
1 " 31 0 93	529	538	2	1 B7410 30 1	534			1 " 38 0	380	403	18	1 " 13 0	75	108	17
1 " 31 4	529	538	2	1 B7411 30 1	535			1 " 48 0	380	403	18	1 " 17 0	75	108	17
1 " 31 4 93	529	538	2	1 B7412 30 1	534			1 " 58 0	380	403	18	1 " 18 0	75	108	17
1 B6505 28 0	355	403	15	1 B7413 30 1	535			1 B7964 28 A	374	403	17	1 " 19 0	75	108	17
1 " 38 0	355	403	15	1 B7414 30 1	534			1 " 38 A	374	403	17	1 " 20 0	75	108	17
1 " 48 0	355	403	15	1 B7415 30 1	535			1 " 48 A	374	403	17	1 " 21 0	75	108	17
1 " 58 0	355	403	15	1 B7424 30 1	535			1 " 58 A	374	403	17	1 " 22 0	75	108	17
1 B6515 25 0	355	403	15	1 B7425 30 1	536			1 B7965 28 A	374	403	17	1 " 23 0	75	108	17
1 " 28 0	355	403	15	1 B7426 30 1	535			1 " 38 A	374	403	17	1 " 24 0	75	108	17
1 " 28 B	352	403	15	1 B7428 30 1	535			1 " 48 A	374	403	17	1 " 25 0	75	108	17
1 " 38 0	355	403	15	1 B7429 30 1	536			1 " 58 A	374	403	17	1 " 26 0	75	108	17
1 " 38 B	352	403	15	1 B7505 25 0	359	403	15	1 B7966 28 A	374	403	17	1 " 27 0	75	108	17
1 " 48 0	355	403	15	1 " 28 0	359	403	15	1 " 38 A	374	403	17	1 " 28 0	75	108	17
1 " 48 B	352	403	15	1 " 38 0	359	403	15	1 " 48 A	374	403	17	1 " 29 0	75	108	17
1 " 58 0	355	403	15	1 " 48 0	359	403	15	1 " 58 A	374	403	17	1 " 30 0	75	108	17
1 " 58 B	352	403	15	1 " 58 0	359	403	15	1 B7984 28 A	382	403	18	1 " 31 0	75	108	17
1 B6525 28 0	357	403	16	1 B7515 25 0	359	403	15	1 " 38 A	382	403	18	1 " 32 0	75	108	17
1 " 38 0	357	403	16	1 " 28 0	359	403	15	1 " 48 A	382	403	18	1 " 33 0	75	108	17
1 " 48 0	357	403	16	1 " 38 0	359	403	15	1 " 58 A	382	403	18	1 " 35 0	75	108	17
1 " 58 0	357	403	16	1 " 48 0	359	403	15	1 B7985 28 A	382	403	18	1 " 36 0	75	108	17
1 B6535 28 0	357	403	16	1 " 58 0	359	403	15	1 " 38 A	382	403	18	1 " 37 0	75	108	17
1 " 28 B	353	403	16	1 B7525 28 0	361	403	16	1 " 48 A	382	403	18	1 " 38 0	75	108	17
1 " 38 0	357	403	16	1 " 38 0	361	403	16	1 " 58 A	382	403	18	1 " 39 0	75	108	17
1 " 38 B	353	403	16	1 " 48 0	361	403	16	1 B7986 38 A	382	403	18	1 " 40 0	75	108	17
1 " 48 0	357	403	16	1 " 58 0	361	403	16	1 " 48 A	382	403	18	1 " 41 0	75	108	17
1 " 48 B	353	403	16	1 B7535 28 0	361	403	16	1 " 58 A	382	403	18	1 " 42 0	75	108	17
1 " 58 0	357	403	16	1 " 38 0	361	403	16	1 C1415 03 0 97	502	515	4	1 " 43 0	75	108	17
1 " 58 B	353	403	16	1 " 48 0	361	403	16	1 C1416 03 0 97	502	515	4	1 " 46 0	75	108	17
1 B6615 28 0	355	403	15	1 " 58 0	361	403	16	1 C1510 03 0 97	503	515	6	1 " 70 0	75	108	17
1 " 38 0	355	403	15	1 B7655 28 A	362	403	15	1 C1511 03 0 97	503	515	6	1 " 71 0	75	108	17
1 " 48 0	355	403	15	1 " 38 A	362	403	15	1 C1610 03 0 97	503	515	6	1 0A312 07 0	76	108	12
1 " 58 0	355	403	15	1 " 48 A	362	403	15	1 " 05 0 97	503	516	7	1 " 10 0	76	108	12
1 B6764 28 0	371	403	17	1 " 58 A	362	403	15	1 C1611 03 0 97	503	515	6	1 " 12 0	76	108	12
1 " 38 0	371	403	17	1 B7665 28 A	363	403	15	1 " 05 0 97	503	516	7	1 " 13 0	76	108	12
1 " 48 0	371	403	17	1 " 38 A	363	403	15	1 C2010 03 0 97	504	515	5	1 " 17 0	76	108	12
1 " 58 0	371	403	17	1 " 48 A	363	403	15	1 C2110 03 0 97	504	516	8	1 " 18 0	76	108	12
1 B6765 28 0	371	403	17	1 " 58 A	363	403	15	1 D6200 03 0 97	505	516	9	1 " 19 0	76	108	12
1 " 38 0	371	403	17	1 B7675 28 A	365	403	16	1 D6210 03 0 97	505	516	9	1 " 20 0	76	108	12
1 " 48 0	371	403	17	1 " 38 A	365	403	16	1 D7200 04 0 97	507	515	3	1 " 21 0	76	108	12
1 " 58 0	371	403	17	1 " 48 A	365	403	16	1 D7201 04 0 97	507	515	3	1 " 23 0	76	108	12
1 B6766 28 0	371	403	17	1 " 58 A	365	403	16	1 D7210 04 0 97	507	515	3	1 " 26 0	76	108	12
1 " 28 B	371	403	17	1 B7685 28 A	365	403	16	1 D7211 04 0 97	507	515	3	1 " 27 0	76	108	12
1 " 38 0	371	403	17	1 " 38 A	365	403	16	1 D8200 03 0 97	506	516	10	1 " 29 0	76	108	12
1 " 38 B	371	403	17	1 " 58 A	365	403	16	1 E6515 27 0	349	402	3	1 " 36 0	76	108	12
1 " 48 B	371	403	17	1 B7764 28 0	372	403	17	1 " 28 0	349	402	3	1 " 37 0	76	108	12
1 " 58 0	371	403	17	1 " 38 0	372	403	17	1 " 38 0	349	402	3	1 " 40 0	76	108	12
1 " 58 B	371	403	17	1 " 48 0	372	403	17	1 E6535 28 0	350	402	4	1 " 42 0	76	108	12
1 B6784 28 0	379	403	18	1 " 58 0	372	403	17	1 0A112 00 0	77			1 " 43 0	76	108	12
1 " 38 0	379	403	18	1 B7765 38 0	372	403	17	1 0A114 00 0	77			1 " 46 0	76	108	12
1 " 48 0	379	403	18	1 " 48 0	372	403	17	1 0A115 00 0	78			1 " 54 0	76	108	12
1 " 58 0	379	403	18	1 " 58 0	372	403	17	1 0A116 00 0	78			1 " 64 0	76	108	12

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 0A312 72 0	76	108	12	1 0A352 13 0	74	108	12	1 0E300 21 0	68	108	17	1 0E302 20 0	70	108	12
1 " 81 0	76	108	12	1 " 17 0	74	108	12	1 " 22 0	68	108	17	1 " 21 0	70	108	12
1 " 82 0	76	108	12	1 " 18 0	74	108	12	1 " 23 0	68	108	17	1 " 23 0	70	108	12
1 " 83 0	76	108	12	1 " 19 0	74	108	12	1 " 24 0	68	108	17	1 " 26 0	70	108	12
1 " 84 0	76	108	12	1 " 20 0	74	108	12	1 " 25 0	68	108	17	1 " 28 0	70	108	12
1 " 85 0	76	108	12	1 " 21 0	74	108	12	1 " 26 0	68	108	17	1 " 29 0	70	108	12
1 " 86 0	76	108	12	1 " 23 0	74	108	12	1 " 27 0	68	108	17	1 " 30 0	70	108	12
1 " 89 0	76	108	12	1 " 25 0	74	108	12	1 " 28 0	68	108	17	1 " 36 0	70	108	12
1 " 94 0	76	108	12	1 " 26 0	74	108	12	1 " 29 0	68	108	17	1 " 39 0	70	108	12
1 0A314 02 0	76	108	13	1 " 28 0	74	108	12	1 " 30 0	68	108	17	1 " 40 0	70	108	12
1 " 03 0	76	108	13	1 " 29 0	74	108	12	1 " 31 0	68	108	17	1 " 42 0	70	108	12
1 " 04 0	76	108	13	1 " 30 0	74	108	12	1 " 32 0	68	108	17	1 " 43 0	70	108	12
1 " 05 0	76	108	13	1 " 35 0	74	108	12	1 " 33 0	68	108	17	1 " 46 0	70	108	12
1 " 06 0	76	108	13	1 " 37 0	74	108	12	1 " 35 0	68	108	17	1 " 54 0	70	108	12
1 " 07 0	76	108	13	1 " 39 0	74	108	12	1 " 36 0	68	108	17	1 " 64 0	70	108	12
1 " 08 0	76	108	13	1 " 40 0	74	108	12	1 " 37 0	68	108	17	1 " 81 0	70	108	12
1 " 10 0	76	108	13	1 " 42 0	74	108	12	1 " 38 0	68	108	17	1 " 82 0	70	108	12
1 " 11 0	76	108	13	1 " 43 0	74	108	12	1 " 39 0	68	108	17	1 " 84 0	70	108	12
1 " 21 0	76	108	13	1 " 46 0	74	108	12	1 " 40 0	68	108	17	1 0E303 07 0 12	70	108	17
1 0A317 07 0	76	108	15	1 " 54 0	74	108	12	1 " 41 0	68	108	17	1 0E304 02 0	69	108	13
1 " 12 0	76	108	15	1 " 64 0	74	108	12	1 " 42 0	68	108	17	1 " 03 0	69	108	13
1 " 81 0	76	108	15	1 " 70 0	74	108	12	1 " 43 0	68	108	17	1 " 04 0	69	108	13
1 " 87 0	76	108	15	1 " 71 0	74	108	12	1 " 70 0	68	108	17	1 " 05 0	69	108	13
1 " 88 0	76	108	15	1 " 72 0	74	108	12	1 " 71 0	68	108	17	1 " 06 0	69	108	13
1 " 90 0	76	108	15	1 " 81 0	74	108	12	1 0E301 06 0	69	108	17	1 " 07 0	69	108	13
1 0A351 06 0	73	108	17	1 " 82 0	74	108	12	1 " 07 0	69	108	17	1 " 08 0	69	108	13
1 " 07 0	73	108	17	1 " 83 0	74	108	12	1 " 09 0	69	108	17	1 " 10 0	69	108	13
1 " 09 0	73	108	17	1 " 84 0	74	108	12	1 " 10 0	69	108	17	1 " 13 0	69	108	13
1 " 10 0	73	108	17	1 " 86 0	74	108	12	1 " 11 0	69	108	17	1 " 18 0	69	108	13
1 " 11 0	73	108	17	1 " 89 0	74	108	12	1 " 12 0	69	108	17	1 " 20 0	69	108	13
1 " 12 0	73	108	17	1 " 94 0	74	108	12	1 " 13 0	69	108	17	1 " 21 0	69	108	13
1 " 13 0	73	108	17	1 " 98 0	74	108	12	1 " 17 0	69	108	17	1 0E305 02 0 12	70	108	13
1 " 17 0	73	108	17	1 0A357 07 0	74	108	15	1 " 18 0	69	108	17	1 0E307 07 0	70	108	15
1 " 18 0	73	108	17	1 " 12 0	74	108	15	1 " 19 0	69	108	17	1 " 12 0	70	108	15
1 " 19 0	73	108	17	1 " 81 0	74	108	15	1 " 20 0	69	108	17	1 " 81 0	70	108	15
1 " 20 0	73	108	17	1 " 87 0	74	108	15	1 " 21 0	69	108	17	1 " 87 0	70	108	15
1 " 21 0	73	108	17	1 " 88 0	74	108	15	1 " 22 0	69	108	17	1 " 88 0	70	108	15
1 " 22 0	73	108	17	1 " 90 0	74	108	15	1 " 23 0	69	108	17	1 " 90 0	70	108	15
1 " 23 0	73	108	17	1 " 91 0	74	108	15	1 " 24 0	69	108	17	1 " 91 0	70	108	15
1 " 24 0	73	108	17	1 " 92 0	74	108	15	1 " 25 0	69	108	17	1 0E500 00 0	71	107	2
1 " 25 0	73	108	17	1 0A410 00 0	79	109	21	1 " 26 0	69	108	17	1 0E600 00 0	72	107	8
1 " 26 0	73	108	17	1 0A415 01 0	79	109	22	1 " 27 0	69	108	17	1 " 10 0	72	107	8
1 " 27 0	73	108	17	1 0A510 00 0	77	107	2	1 " 28 0	69	108	17	1 " 11 0	72	107	8
1 " 28 0	73	108	17	1 " 11 0	77	107	3	1 " 29 0	69	108	17	1 0G115 00 0	55		
1 " 29 0	73	108	17	1 0A610 00 0	79	107	8	1 " 30 0	69	108	17	1 0G150 00 0	55		
1 " 30 0	73	108	17	1 " 10 0	79	107	8	1 " 31 0	69	108	17	1 0G200 05 0	55	107	7
1 " 31 0	73	108	17	1 " 11 0	79	107	8	1 " 32 0	69	108	17	1 " 55 0	55	107	7
1 " 32 0	73	108	17	1 0E115 00 0	71			1 " 33 0	69	108	17	1 " 65 0	55	107	7
1 " 33 0	73	108	17	1 0E149 00 0	71			1 " 35 0	69	108	17	1 " 75 0	55	107	7
1 " 35 0	73	108	17	1 0E150 00 0	71			1 " 36 0	69	108	17	1 " 85 0	55	107	7
1 " 36 0	73	108	17	1 0E200 50 0	71	107	7	1 " 37 0	69	108	17	1 " 95 0	55	107	7
1 " 37 0	73	108	17	1 0E300 05 0	68	108	17	1 " 38 0	69	108	17	1 0G300 02 0	52	108	17
1 " 38 0	73	108	17	1 " 06 0	68	108	17	1 " 39 0	69	108	17	1 " 03 0	52	108	17
1 " 39 0	73	108	17	1 " 07 0	68	108	17	1 " 41 0	69	108	17	1 " 04 0	52	108	17
1 " 40 0	73	108	17	1 " 08 0	68	108	17	1 " 42 0	69	108	17	1 " 05 0	52	108	17
1 " 41 0	73	108	17	1 " 09 0	68	108	17	1 " 43 0	69	108	17	1 " 06 0	52	108	17
1 " 42 0	73	108	17	1 " 10 0	68	108	17	1 " 70 0	69	108	17	1 " 07 0	52	108	17
1 " 43 0	73	108	17	1 " 11 0	68	108	17	1 " 71 0	69	108	17	1 " 08 0	52	108	17
1 " 46 0	73	108	17	1 " 12 0	68	108	17	1 0E302 07 0	70	108	12	1 " 09 0	52	108	17
1 " 70 0	73	108	17	1 " 13 0	68	108	17	1 " 12 0	70	108	12	1 " 10 0	52	108	17
1 " 71 0	73	108	17	1 " 17 0	68	108	17	1 " 13 0	70	108	12	1 " 11 0	52	108	17
1 0A352 07 0	74	108	12	1 " 18 0	68	108	17	1 " 17 0	70	108	12	1 " 12 0	52	108	17
1 " 10 0	74	108	12	1 " 19 0	68	108	17	1 " 18 0	70	108	12	1 " 13 0	52	108	17
1 " 12 0	74	108	12	1 " 20 0	68	108	17	1 " 19 0	70	108	12	1 " 14 0	52	108	17

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 OG300 15 0	52	108	17	1 OG302 42 0	53	108	12	1 OH3M4 02 0 12	93			1 OH3S2 19 0 12	87	108	12
1 " 16 0	52	108	17	1 " 43 0	53	108	12	1 " 07 0 12	93			1 " 20 0 12	87	108	12
1 " 17 0	52	108	17	1 " 46 0	53	108	12	1 OH3M7 07 0 12	93			1 " 21 0 12	87	108	12
1 " 18 0	52	108	17	1 " 54 0	53	108	12	1 " 81 0 12	93			1 " 23 0 12	87	108	12
1 " 19 0	52	108	17	1 " 64 0	53	108	12	1 OH3S0 07 0 12	86	108	17	1 " 26 0 12	87	108	12
1 " 20 0	52	108	17	1 " 71 0	53	108	12	1 " 10 0 12	86	108	17	1 " 27 0 12	87	108	17
1 " 21 0	52	108	17	1 " 72 0	53	108	12	1 " 12 0 12	86	108	17	1 " 28 0 12	87	108	12
1 " 22 0	52	108	17	1 " 81 0	53	108	12	1 " 13 0 12	86	108	17	1 " 29 0 12	87	108	12
1 " 23 0	52	108	17	1 " 82 0	53	108	12	1 " 17 0 12	86	108	17	1 " 30 0 12	87	108	12
1 " 24 0	52	108	17	1 " 83 0	53	108	12	1 " 18 0 12	86	108	17	1 " 31 0 12	87	108	12
1 " 25 0	52	108	17	1 " 84 0	53	108	12	1 " 19 0 12	86	108	17	1 " 33 0 12	87	108	12
1 " 26 0	52	108	17	1 " 85 0	53	108	12	1 " 20 0 12	86	108	17	1 " 40 0 12	87	108	12
1 " 27 0	52	108	17	1 " 86 0	53	108	12	1 " 21 0 12	86	108	17	1 " 42 0 12	87	108	12
1 " 28 0	52	108	17	1 " 89 0	53	108	12	1 " 22 0 12	86	108	17	1 " 43 0 12	87	108	12
1 " 29 0	52	108	17	1 OG303 07 0 12	54	108	17	1 " 23 0 12	86	108	17	1 " 64 0 12	87	108	12
1 " 30 0	52	108	17	1 OG304 02 0	53	108	13	1 " 24 0 12	86	108	17	1 " 71 0 12	87	108	12
1 " 31 0	52	108	17	1 " 03 0	53	108	13	1 " 25 0 12	86	108	17	1 " 81 0 12	87	108	12
1 " 32 0	52	108	17	1 " 04 0	53	108	13	1 " 26 0 12	86	108	17	1 " 82 0 12	87	108	12
1 " 33 0	52	108	17	1 " 05 0	53	108	13	1 " 27 0 12	86	108	17	1 " 83 0 12	87	108	12
1 " 35 0	52	108	17	1 " 06 0	53	108	13	1 " 28 0 12	86	108	17	1 " 84 0 12	87	108	12
1 " 36 0	52	108	17	1 " 07 0	53	108	13	1 " 29 0 12	86	108	17	1 " 85 0 12	87	108	12
1 " 37 0	52	108	17	1 " 09 0	53	108	13	1 " 30 0 12	86	108	17	1 " 86 0 12	87	108	12
1 " 38 0	52	108	17	1 " 10 0	53	108	13	1 " 31 0 12	86	108	17	1 " 89 0 12	87	108	12
1 " 39 0	52	108	17	1 " 11 0	53	108	13	1 " 32 0 12	86	108	17	1 " 90 0 12	87	108	17
1 " 40 0	52	108	17	1 " 13 0	53	108	13	1 " 33 0 12	86	108	17	1 " 91 0 12	87	108	17
1 " 41 0	52	108	17	1 " 18 0	53	108	13	1 " 35 0 12	86	108	17	1 " 94 0 12	87	108	12
1 " 42 0	52	108	17	1 " 20 0	53	108	13	1 " 36 0 12	86	108	17	1 " 98 0 12	87	108	17
1 " 43 0	52	108	17	1 " 21 0	53	108	13	1 " 37 0 12	86	108	17	1 " 99 0 12	87	108	17
1 " 46 0	52	108	17	1 " 35 0	53	108	13	1 " 39 0 12	86	108	17	1 OH3S7 07 0 12	88	108	15
1 " 49 0	52	108	17	1 OG305 02 0 12	54	108	13	1 " 42 0 12	86	108	17	1 " 12 0 12	88	108	15
1 " 50 0	52	108	17	1 OG307 07 0	54	108	15	1 " 43 0 12	86	108	17	1 " 81 0 12	88	108	15
1 " 52 0	52	108	17	1 " 12 0	54	108	15	1 " 60 0 12	86	108	17	1 " 87 0 12	88	108	15
1 " 54 0	52	108	17	1 " 81 0	54	108	15	1 " 70 0 12	86	108	17	1 " 88 0 12	88	108	15
1 " 60 0	52	108	17	1 " 87 0	54	108	15	1 " 76 0 12	86	108	17	1 " 90 0 12	88	108	15
1 " 70 0	52	108	17	1 " 88 0	54	108	15	1 OH3S1 07 0 12	87	108	17	1 " 91 0 12	88	108	15
1 OG301 05 0	53	108	17	1 " 90 0	54	108	15	1 " 12 0 12	87	108	17	1 OH410 00 0 12	92	109	21
1 " 06 0	53	108	17	1 " 91 0	54	108	15	1 " 13 0 12	87	108	17	1 OH415 01 0 12	92	109	22
1 " 07 0	53	108	17	1 OG500 00 0	55	107	2	1 " 17 0 12	87	108	17	1 " 03 0 12	92	109	22
1 " 09 0	53	108	17	1 OH112 00 0 12	90			1 " 18 0 12	87	108	17	1 OH510 00 0 12	90	107	2
1 " 11 0	53	108	17	1 OH114 00 0 12	90			1 " 19 0 12	87	108	17	1 " 10 0 12	90	107	3
1 " 12 0	53	108	17	1 OH116 00 0 12	91			1 " 20 0 12	87	108	17	1 OH610 00 0	92	107	8
1 " 13 0	53	108	17	1 OH120 00 0 12	91			1 " 21 0 12	87	108	17	1 " 10 0	92		
1 " 26 0	53	108	17	1 OH149 00 0 12	91			1 " 22 0 12	87	108	17	1 " 11 0	92		
1 " 28 0	53	108	17	1 OH150 00 0 12	90			1 " 23 0 12	87	108	17	1 " 12 0 12	92		
1 " 30 0	53	108	17	1 OH155 00 0 12	91			1 " 24 0 12	87	108	17	1 OL112 00 0 12CL	98		
1 OG302 07 0	53	108	12	1 OH156 00 0 12	91			1 " 25 0 12	87	108	17	1 OL114 00 0 12CL	98		
1 " 10 0	53	108	12	1 OH210 50 0 12	90	107	7	1 " 26 0 12	87	108	17	1 OL116 00 0 12CL	99		
1 " 12 0	53	108	12	1 OH314 02 0 12	89	108	13	1 " 27 0 12	87	108	17	1 OL120 00 0 12CL	99		
1 " 13 0	53	108	12	1 " 03 0 12	89	108	13	1 " 28 0 12	87	108	17	1 OL149 00 0 12CL	99		
1 " 17 0	53	108	12	1 " 04 0 12	89	108	13	1 " 29 0 12	87	108	17	1 OL150 00 0 12CL	99		
1 " 18 0	53	108	12	1 " 05 0 12	89	108	13	1 " 30 0 12	87	108	17	1 OL155 00 0 12CL	98		
1 " 19 0	53	108	12	1 " 06 0 12	89	108	13	1 " 31 0 12	87	108	17	1 OL156 00 0 12CL	98		
1 " 20 0	53	108	12	1 " 07 0 12	89	108	13	1 " 32 0 12	87	108	17	1 OL210 50 0 12CL	98	107	7
1 " 21 0	53	108	12	1 " 08 0 12	89	108	13	1 " 35 0 12	87	108	17	1 OL314 02 0 12CL	97	108	13
1 " 23 0	53	108	12	1 " 13 0 12	89	108	13	1 " 36 0 12	87	108	17	1 " 03 0 12CL	97	108	13
1 " 26 0	53	108	12	1 " 20 0 12	89	108	13	1 " 37 0 12	87	108	17	1 " 04 0 12CL	97	108	13
1 " 28 0	53	108	12	1 " 21 0 12	89	108	13	1 " 38 0 12	87	108	17	1 " 05 0 12CL	97	108	13
1 " 29 0	53	108	12	1 OH3M1 07 0 12	93			1 " 55 0 12	87	108	17	1 " 06 0 12CL	97	108	13
1 " 30 0	53	108	12	1 " 13 0 12	93			1 OH3S2 07 0 12	87	108	12	1 " 07 0 12CL	97	108	13
1 " 35 0	53	108	12	1 " 26 0 12	93			1 " 10 0 12	87	108	12	1 " 08 0 12CL	97	108	13
1 " 36 0	53	108	12	1 OH3M2 07 0 12	93			1 " 12 0 12	87	108	12	1 " 13 0 12CL	97	108	13
1 " 37 0	53	108	12	1 " 13 0 12	93			1 " 13 0 12	87	108	12	1 " 20 0 12CL	97	108	13
1 " 39 0	53	108	12	1 " 26 0 12	93			1 " 17 0 12	87	108	12	1 " 21 0 12CL	97	108	13
1 " 40 0	53	108	12	1 " 81 0 12	93			1 " 18 0 12	87	108	12	1 OL3M1 07 0 12CL	101		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 0L3M2 07 0 12CL	101			1 0L3S7 87 0 12CL	97	108	13	1 0M312 18 0 12CL	81	108	12	1 00102 00 1	48		
1 0L3M4 02 0 12CL	101			1 " 88 0 12CL	97	108	13	1 " 19 0 12CL	81	108	12	1 00104 00 1	48		
1 0L3M7 07 0 12CL	101			1 " 90 0 12CL	97	108	13	1 " 20 0 12CL	81	108	12	1 00110 00 1	48		
1 0L3S1 07 0 12CL	96	108	17	1 " 91 0 12CL	97	108	13	1 " 21 0 12CL	81	108	12	1 00120 00 1	48		
1 " 12 0 12CL	96	108	17	1 0L410 00 0 12CL	100	109	21	1 " 23 0 12CL	81	108	12	1 " 00 2	48		
1 " 13 0 12CL	96	108	17	1 0L415 01 0 12CL	100	109	22	1 " 25 0 12CL	81	108	12	1 00121 00 1	48		
1 " 17 0 12CL	96	108	17	1 " 03 0 12CL	100	109	22	1 " 26 0 12CL	81	108	12	1 00122 00 1	48		
1 " 18 0 12CL	96	108	17	1 0L510 00 0 12CL	98	107	2	1 " 27 0 12CL	81	108	12	1 00123 00 1	48		
1 " 19 0 12CL	96	108	17	1 " 10 0 12CL	98	107	3	1 " 28 0 12CL	81	108	12	1 00124 00 1	48		
1 " 20 0 12CL	96	108	17	1 0L610 00 0 00CL	100			1 " 29 0 12CL	81	108	12	1 00125 00 1	48		
1 " 21 0 12CL	96	108	17	1 " 10 0 00CL	100			1 " 30 0 12CL	81	108	12	1 " 00 2	48		
1 " 22 0 12CL	96	108	17	1 " 11 0 00CL	100			1 " 35 0 12CL	81	108	12	1 00162 00 1	48		
1 " 23 0 12CL	96	108	17	1 0M112 00 0 12CL	83			1 " 36 0 12CL	81	108	12	1 00163 00 1	48		
1 " 24 0 12CL	96	108	17	1 0M114 00 0 12CL	83			1 " 37 0 12CL	81	108	12	1 00170 00 1	48		
1 " 25 0 12CL	96	108	17	1 0M116 00 0 12CL	84			1 " 39 0 12CL	81	108	12	1 00171 00 1	48		
1 " 26 0 12CL	96	108	17	1 0M120 00 0 12CL	84			1 " 42 0 12CL	81	108	12	1 00210 00 0	41		
1 " 27 0 12CL	96	108	17	1 0M149 00 0 12CL	84			1 " 43 0 12CL	81	108	12	1 00211 00 0	41		
1 " 28 0 12CL	96	108	17	1 0M150 00 0 12CL	83			1 " 46 0 12CL	81	108	12	1 00401 00 1	45		
1 " 29 0 12CL	96	108	17	1 0M155 00 0 12CL	84			1 " 54 0 12CL	81	108	12	1 " 00 2	45		
1 " 30 0 12CL	96	108	17	1 0M156 00 0 12CL	84			1 " 64 0 12CL	81	108	12	1 00450 01 1	45		
1 " 31 0 12CL	96	108	17	1 0M210 50 0 12CL	83	107	7	1 " 81 0 12CL	81	108	12	1 " 90 1	45		
1 " 32 0 12CL	96	108	17	1 0M311 06 0 12CL	80	108	17	1 " 82 0 12CL	81	108	12	1 00600 01 0	46		
1 " 33 0 12CL	96	108	17	1 " 07 0 12CL	80	108	17	1 " 83 0 12CL	81	108	12	1 00620 01 0	46		
1 " 35 0 12CL	96	108	17	1 " 09 0 12CL	80	108	17	1 " 84 0 12CL	81	108	12	1 " 90 0	46		
1 " 36 0 12CL	96	108	17	1 " 10 0 12CL	80	108	17	1 " 85 0 12CL	81	108	12	1 00670 01 0	46		
1 " 37 0 12CL	96	108	17	1 " 11 0 12CL	80	108	17	1 " 91 0 12CL	81	108	12	1 00690 00 0 00CL	46		
1 " 38 0 12CL	96	108	17	1 " 12 0 12CL	80	108	17	1 " 94 0 12CL	81	108	12	1 01040 01 1	41		
1 " 39 0 12CL	96	108	17	1 " 13 0 12CL	80	108	17	1 " 98 0 12CL	81	108	12	1 " 02 1	41		
1 " 42 0 12CL	96	108	17	1 " 17 0 12CL	80	108	17	1 0M314 02 0 12CL	81	108	13	1 " 03 1	41		
1 " 43 0 12CL	96	108	17	1 " 18 0 12CL	80	108	17	1 " 03 0 12CL	81	108	13	1 " 04 1	41		
1 " 55 0 12CL	96	108	17	1 " 19 0 12CL	80	108	17	1 " 04 0 12CL	81	108	13	1 " 05 1	41		
1 " 60 0 12CL	96	108	17	1 " 20 0 12CL	80	108	17	1 " 05 0 12CL	81	108	13	1 01060 10 0	41		
1 " 70 0 12CL	96	108	17	1 " 21 0 12CL	80	108	17	1 " 06 0 12CL	81	108	13	1 01070 01 1	42		
1 0L3S2 07 0 12CL	97	108	12	1 " 22 0 12CL	80	108	17	1 " 07 0 12CL	81	108	13	1 " 01 2	42		
1 " 12 0 12CL	97	108	12	1 " 23 0 12CL	80	108	17	1 " 08 0 12CL	81	108	13	1 " 05 1	42		
1 " 13 0 12CL	97	108	12	1 " 24 0 12CL	80	108	17	1 " 09 0 12CL	81	108	13	1 " 05 2	42		
1 " 17 0 12CL	97	108	12	1 " 25 0 12CL	80	108	17	1 " 10 0 12CL	81	108	13	1 " 10 1	42		
1 " 18 0 12CL	97	108	12	1 " 26 0 12CL	80	108	17	1 " 11 0 12CL	81	108	13	1 " 10 2	42		
1 " 19 0 12CL	97	108	12	1 " 27 0 12CL	80	108	17	1 " 13 0 12CL	81	108	13	1 01210 00 2	41		
1 " 20 0 12CL	97	108	12	1 " 28 0 12CL	80	108	17	1 " 20 0 12CL	81	108	13	1 01220 00 2	42		
1 " 21 0 12CL	97	108	12	1 " 29 0 12CL	80	108	17	1 " 21 0 12CL	81	108	13	1 01310 00 1	42		
1 " 23 0 12CL	97	108	12	1 " 30 0 12CL	80	108	17	1 " 35 0 12CL	81	108	13	1 " 00 2	42		
1 " 26 0 12CL	97	108	12	1 " 31 0 12CL	80	108	17	1 0M317 07 0 12CL	82	108	15	1 " 10 1	43		
1 " 27 0 12CL	97	108	12	1 " 32 0 12CL	80	108	17	1 " 12 0 12CL	82	108	15	1 " 10 2	43		
1 " 28 0 12CL	97	108	12	1 " 33 0 12CL	80	108	17	1 " 81 0 12CL	82	108	15	1 " 20 1	43		
1 " 29 0 12CL	97	108	12	1 " 35 0 12CL	80	108	17	1 " 87 0 12CL	82	108	15	1 " 20 2	43		
1 " 30 0 12CL	97	108	12	1 " 36 0 12CL	80	108	17	1 " 88 0 12CL	82	108	15	1 " 30 1	43		
1 " 40 0 12CL	97	108	12	1 " 37 0 12CL	80	108	17	1 " 90 0 12CL	82	108	15	1 " 30 2	43		
1 " 42 0 12CL	97	108	12	1 " 38 0 12CL	80	108	17	1 " 91 0 12CL	82	108	15	1 " 40 1	43		
1 " 43 0 12CL	97	108	12	1 " 39 0 12CL	80	108	17	1 " 92 0 12CL	82	108	15	1 01320 00 1	42		
1 " 64 0 12CL	97	108	12	1 " 40 0 12CL	80	108	17	1 " 93 0 12CL	82	108	15	1 " 00 2	42		
1 " 71 0 12CL	97	108	12	1 " 41 0 12CL	80	108	17	1 " A3 0 12CL	82	108	15	1 " 10 1	43		
1 " 81 0 12CL	97	108	12	1 " 42 0 12CL	80	108	17	1 0M410 00 0 12CL	85	109	21	1 " 10 2	43		
1 " 83 0 12CL	97	108	12	1 " 43 0 12CL	80	108	17	1 0M415 01 0 12CL	85	109	22	1 " 20 1	43		
1 " 84 0 12CL	97	108	12	1 " 46 0 12CL	80	108	17	1 " 03 0 12CL	85	109	22	1 " 30 1	43		
1 " 85 0 12CL	97	108	12	1 " 60 0 12CL	80	108	17	1 0M510 00 0 12CL	83	107	2	1 " 30 2	43		
1 " 86 0 12CL	97	108	12	1 " 65 0 12CL	80	108	17	1 " 10 0 12CL	83	107	3	1 " 40 1	44		
1 " 89 0 12CL	97	108	12	1 " 70 0 12CL	80	108	17	1 0M610 00 0 00CL	85	107	8	1 01330 00 1	44		
1 " 94 0 12CL	97	108	12	1 " 71 0 12CL	80	108	17	1 " 10 0 12CL	85			1 " 00 2	44		
1 " 98 0 12CL	97	108	12	1 0M312 07 0 12CL	81	108	12	1 " 11 0 12CL	85			1 01336 00 1	45		
1 " 99 0 12CL	97	108	12	1 " 10 0 12CL	81	108	12	1 " 12 0 12CL	85			1 " 00 2	45		
1 0L3S7 07 0 12CL	97	108	13	1 " 12 0 12CL	81	108	12	1 00100 00 1	48			1 01337 00 1	45		
1 " 12 0 12CL	97	108	13	1 " 13 0 12CL	81	108	12	1 00101 00 1	48			1 " 00 2	45		
1 " 81 0 12CL	97	108	13	1 " 17 0 12CL	81	108	12	1 " 00 2	48			1 01410 00 1	44		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 01410 00 2	44			1 05001 00 0 38	271			1 06086 00 0	162			1 06144 10 1	393		
1 01420 00 1	44			1 05002 00 1 06	271			1 " 01 0	224			1 " 15 0	393		
1 " 00 2	44			1 " 00 1 07	271			1 " 02 0	224			1 " 50 1	393		
1 01425 00 1	44			1 " 00 1 20	271			1 06091 10 0	315			1 06145 10 0	394		
1 " 00 2	44			1 " 00 1 38	271			1 06092 00 0	163			1 " 11 0	394		
1 01430 00 1	44			1 " 00 2 06	271			1 06098 00 0	316			1 " 15 0	394		
1 " 00 2	44			1 " 00 2 07	271			1 06100 10 0	316			1 " 50 0	394		
1 01440 00 1	44			1 " 00 2 20	271			1 " 15 0	316			1 06146 00 0	319		
1 " 00 2	44			1 " 00 2 38	271			1 06101 10 0	316			1 06147 00 0	228		
1 01510 00 1	44			1 05003 00 1 06	272			1 06102 10 0	316			1 " 01 0	228		
1 " 00 2	44			1 " 00 1 07	272			1 " 13 0	316			1 06149 00 0	316		
1 01710 00 1	45			1 " 00 2 06	272			1 06105 10 0	316			1 06151 00 0	316		
1 " 00 2	45			1 " 00 2 07	272			1 06107 00 0	316			1 06152 00 0	317		
1 02102 00 0	58			1 05004 00 1 06	272			1 06110 00 0	312			1 06157 00 0	228		
1 02104 00 0	58			1 " 00 1 07	272			1 " 10 0	224			1 06162 00 0	317		
1 02106 00 0	59			1 " 00 2 06	272			1 06119 00 0	327			1 06163 00 0	317		
1 02110 00 0	59			1 " 00 2 07	272			1 06123 00 1	225			1 06167 00 0	228		
1 02139 00 0	59			1 05005 00 0 06	272			1 " 03 0	225			1 06168 00 0	211		
1 02142 00 0	59			1 " 00 0 07	272			1 " 04 0	393			1 06195 00 0	486		
1 02145 00 0	59			1 " 00 0 12	272			1 06124 00 0	163			1 " 01 0	486		
1 02146 00 0	58			1 " 00 0 20	272			1 " 02 0	163			1 " 02 0	486		
1 02156 00 0	59			1 " 00 0 38	272			1 06140 00 0	324			1 " 05 0	486		
1 02163 00 0 12	66			1 05020 00 0	218			1 " 01 0	324			1 " 06 0	486		
1 02164 00 0 12	66			1 05021 00 1	218			1 " 02 0	324			1 " 07 0	486		
1 02179 00 0 12	66			1 " 00 2	218			1 06141 35 0	240			1 " 08 0	210		
1 02180 00 0 12	66			1 05030 00 0	383			1 " 36 0	240			1 " 09 0	486		
1 02400 10 0	60	107	1	1 05031 00 0	383			1 " 37 0	240			1 06196 43 0	469	494	13
1 " 11 0	60	107	1	1 06000 00 0	208			1 " 38 0	240			1 06206 00 0	317		
1 02500 00 0	58	107	2	1 06002 00 0	223			1 " 40 0	241			1 06213 05 0	328		
1 " 11 0	58	107	3	1 06003 00 0	161			1 " 42 0	241			1 06216 00 0	317		
1 02502 00 0 12	66	107	2	1 " 01 0	161			1 " 44 0	241			1 06218 00 0	312		
1 " 10 0 12	66	107	3	1 06004 00 0	161			1 " 52 0	225			1 06220 00 0	394		
1 02520 00 0	58	107	4	1 " 01 0	162			1 " 53 0	225			1 " 02 0	394		
1 02544 10 0	59	107	5	1 06005 00 0	162			1 " 55 0	225			1 " 03 0	394		
1 " 14 0	59	107	5	1 06010 00 0	104			1 " 56 0	225			1 " 05 0	394		
1 " 15 0	59	107	5	1 06011 00 0	104			1 " 57 0	225			1 " 20 0	395		
1 02550 25 0	58	107	6	1 06012 00 0	104			1 " 63 0	225			1 " 26 0	395		
1 02552 10 0	58	107	7	1 " 01 0	223			1 " 65 0	225			1 " 27 0	395		
1 " 50 0	58	107	7	1 06018 25 0	104			1 " 66 0	225			1 " 28 0	395		
1 " 60 0	58	107	7	1 06027 00 0	104			1 " 67 0	225			1 " 29 0	395		
1 " 70 0	58	107	7	1 " 01 0	223			1 " 68 0	225			1 06221 00 0	395		
1 " 80 0	58	107	7	1 06035 00 0	312			1 " 69 0	226			1 " 01 0	395		
1 " 90 0	58	107	7	1 06043 00 0	104			1 " 70 0	226			1 " 10 0	395		
1 02572 50 0 12	66	107	7	1 06047 51 0	387			1 " 71 0	226			1 " 11 0	395		
1 02649 01 0	63	107	8	1 06048 02 0	327			1 " 74 0	226			1 " 15 0	395		
1 " 10 0	60	107	8	1 " 03 0	327			1 " 74 0	226			1 " 16 0	396		
1 " 11 0	60	107	8	1 06062 00 0	240			1 " 75 0	226			1 " 17 0	396		
1 02650 01 0	63	107	8	1 06072 00 0	240			1 " 77 0	226			1 " 18 0	396		
1 02652 01 0	67	107	8	1 06075 00 0	162			1 " 78 0	227			1 " 20 0	396		
1 " 10 0	67	107	8	1 06077 16 0	223			1 " 79 0	227			1 " 50 0	396		
1 " 11 0	67	107	8	1 " 20 0	223			1 " 80 0	462			1 " 51 0	396		
1 02715 10 1	385	402	1	1 06078 16 0	223			1 " 82 0	227			1 " 52 0	396		
1 " 11 1	385	402	1	1 " 20 0	223			1 " 84 0	227			1 " 60 0	396		
1 02716 00 1	386	402	1	1 06079 16 0	223			1 " 85 0	227			1 " 61 0	396		
1 " 01 1	386	402	1	1 " 20 0	223			1 " 86 0	227			1 " 62 0	396		
1 " 10 1	386	402	1	1 " 77 0	223			1 " 87 0	227			1 06223 00 0	317		
1 " 11 1	386	402	1	1 06080 16 0	223			1 " 88 0	462			1 06224 00 0	228		
1 " 50 1	386	402	1	1 " 20 0	224			1 " 89 0	228			1 " 50 0	397		
1 " 51 1	386	402	1	1 06081 00 0	327			1 " 97 0	486			1 " 60 0	397		
1 " 60 1	386	402	1	1 " 01 0	393			1 06142 00 0	321			1 06226 00 0	317		
1 " 61 1	386	402	1	1 06082 00 0	327			1 " 01 0	393			1 06228 08 0	397		
1 05001 00 0 06	271			1 06083 00 0	327			1 " 02 0	393			1 " 28 0	397		
1 " 00 0 07	271			1 06084 00 0	320			1 " 85 0	462			1 06231 00 0	321		
1 " 00 0 12	271			1 06085 00 0	320			1 06143 00 0	327			1 06232 00 0	164		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 06232 01 0	164			1 06279 10 0	328			1 06323 00 0	332			1 06429 05 0	387		
1 " 05 0	228			1 " 10 0 82	328			1 " 00 0 82	329			1 " 06 0	387		
1 " 06 0	228			1 " 11 0	328			1 " 01 0	329			1 " 10 0	387		
1 " 20 0	164			1 " 12 0	322			1 06325 00 0	329			1 " 15 0	387		
1 " 21 0	164			1 06281 00 0	322			1 06328 00 0	329			1 " 16 0	388		
1 " 22 0	164			1 06282 00 0	322			1 " 00 0 82	329			1 " 18 0	388		
1 06233 00 0	228			1 06283 01 0	322			1 " 00 0 B7	329			1 " 20 0	388		
1 " 01 0	229			1 " 02 0	322			1 06329 00 0	330			1 " 50 0	388		
1 " 02 0	229			1 06284 00 0	322			1 " 00 0 82	330			1 " 51 0	388		
1 " 03 0	229			1 " 01 0	323			1 " 00 0 B7	330			1 " 60 1	388		
1 06235 00 0	321			1 06285 25 0	248			1 06330 00 0	330			1 06433 00 0	399		
1 06236 00 0	324			1 " 27 0	248			1 06331 00 0	330			1 " 01 0	399		
1 06237 01 0	324			1 " 30 0	248			1 06353 00 0 44	105			1 " 10 0	399		
1 06243 00 0	317			1 " 32 0	248			1 " 00 0 60	105			1 " 11 0	399		
1 06270 00 1	321			1 " 34 0	249			1 " 00 0 62	105			1 06434 00 0	399		
1 " 00 2	321			1 " 35 0	249			1 " 00 0 64	105			1 " 01 0	400		
1 06271 00 0	321			1 " 36 0	249			1 06355 00 0 12	105			1 06436 10 0	209		
1 06272 00 0	321			1 " 37 0	249			1 " 00 0 66	105			1 " 11 0	210		
1 06275 00 0	321			1 " 38 0	249			1 06356 00 0 12	105			1 06437 00 0	400		
1 06276 00 0	322			1 " 42 0	249			1 " 00 0 66	105			1 " 01 0	400		
1 06277 01 0	241			1 " 43 0	250			1 06357 00 0 12	105			1 06441 00 0	219		
1 " 02 0	241			1 " 44 0	250			1 " 00 0 66	105			1 " 10 0	219		
1 " 03 0	241			1 06287 02 0	250			1 06411 01 0	105			1 " 15 0	165		
1 " 10 0	242			1 " 11 0	250			1 " 02 0	105			1 " 20 0	219		
1 " 11 0	242			1 " 14 0	251			1 " 03 0	105			1 06442 00 0	219		
1 " 14 0	242			1 " 17 0	251			1 " 04 0	105			1 06443 00 0	220		
1 " 15 0	242			1 " 21 0	251			1 06412 01 0	105			1 " 05 0	220		
1 " 28 0	242			1 " 26 0	251			1 " 02 0	105			1 " 31 0	208		
1 " 32 0	242			1 " 27 0	252			1 " 03 0	105			1 " 36 0	208		
1 " 41 0	243			1 " 29 0	252			1 " 04 0	105			1 06444 46 0	209		
1 " 44 0	243			1 " 50 0	252			1 " 51 0	105			1 " 47 0	209		
1 " 76 0	243			1 " 64 0	252			1 06413 01 0	105			1 " 56 0	209		
1 " 77 0	243			1 " 65 0	252			1 " 02 0	105			1 " 66 0	209		
1 " 78 0	243			1 " 77 0	253			1 " 03 0	105			1 " 67 0	209		
1 " 80 0	243			1 " 88 0	253			1 " 04 0	105			1 " 76 0	209		
1 " 88 0	244			1 " 89 0	253			1 06414 01 0	106			1 06449 00 0	220		
1 " 89 0	244			1 " 92 0	253			1 " 02 0	106			1 " 05 0	210		
1 " 92 0	244			1 " 94 0	253			1 " 03 0	106			1 " 10 0	210		
1 " 94 0	244			1 " 95 0	254			1 " 04 0	106			1 " 11 0	210		
1 " 95 0	244			1 " 97 0	254			1 " 20 0	106			1 06451 00 0	221		
1 " 99 0	245			1 06290 00 0	229			1 " 25 0	106			1 " 10 0	221		
1 06278 00 0	322			1 " 05 0	164			1 " 30 0	106			1 06452 05 0	221		
1 " 01 0	245			1 " 06 0	229			1 06415 00 0	323			1 06453 05 0	221		
1 " 02 0	245			1 " 10 0	164			1 06416 00 0	323			1 06458 10 0	389		
1 " 04 0	245			1 06291 00 0	323			1 06417 00 0	324			1 " 20 0	389		
1 " 05 0	245			1 " 01 0	229			1 06418 00 0	324			1 06459 01 0	229		
1 " 06 0	245			1 " 05 0	323			1 " 01 0	397			1 " 02 0	230		
1 " 07 0	246			1 " 06 0	229			1 " 03 0	397			1 06460 00 0	230		
1 " 10 0	328			1 " 07 0	165			1 06419 00 0	325			1 " 05 0	230		
1 " 11 0	322			1 " 20 0	323			1 06421 10 1	398			1 " 05 0 15	230		
1 " 16 0	246			1 " 50 0	397			1 " 10 2	398			1 " 15 0	330		
1 " 17 0	246			1 06292 00 0	329			1 06422 00 0	325			1 " 40 0	389		
1 " 19 0	246			1 " 01 0	329			1 06423 00 0	325			1 " 50 0	389		
1 " 20 0	246			1 06293 00 0	329			1 06424 00 0	325			1 " 51 0	389		
1 " 21 0	246			1 " 01 0	329			1 06425 00 0	325			1 " 60 0	389		
1 " 22 0	247			1 06300 14 0	128			1 " 01 0	325			1 06461 01 0	230		
1 " 26 0	247			1 " 18 0	128			1 " 02 0	398			1 " 02 0	230		
1 " 27 0	247			1 06301 50 0	128			1 " 03 0	398			1 " 07 0	230		
1 " 28 0	247			1 " 60 0	128			1 " 04 0	398			1 " 11 0	230		
1 " 64 0	247			1 06302 25 0	128			1 " 05 0	399			1 " 12 0	230		
1 " 65 0	247			1 " 60 0	129			1 " 06 0	399			1 " 17 0	230		
1 " 66 0	248			1 06303 00 0	129			1 06426 00 0	326			1 " 20 0	231		
1 " 80 0	248			1 06316 00 0	165			1 " 01 0	326			1 " 21 0	231		
1 06279 00 0	322			1 06322 00 0	329			1 06429 00 0	387			1 " 22 0	231		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 06461 25 0	231			1 06480 21 0	390			1 07018 10 4	313			1 07064 71 0 C2	472	494	13
1 " 26 0	231			1 " 22 0	390			1 07019 10 1	313			1 07065 52 0	486		
1 " 30 0	231			1 06483 00 0	390			1 " 10 2	313			1 07070 12 0	423		
1 " 34 0	231			1 " 20 0	390			1 07020 00 1	166			1 " 14 0	423		
1 " 35 0	231			1 " 60 0	390			1 " 00 2	166			1 " 15 0	423		
1 " 39 0	463			1 " 61 0	390			1 07021 00 0	166			1 " 16 0	423		
1 " 40 0	232			1 " 80 0	390			1 " 01 0	167			1 " 50 0	401		
1 " 45 0	232			1 " 81 0	390			1 " 05 0	167			1 " 56 0 B1	463		
1 " 50 0	389			1 06485 00 0	390			1 " 10 0	313			1 " 60 0	401		
1 " 51 0	389			1 " 01 0	390			1 " 11 0	313			1 " 66 0 B1	463		
1 " 60 0	389			1 " 02 0	390			1 07022 00 0	136			1 07071 10 0	423		
1 " 61 0	389			1 " 20 0	390			1 " 10 0	136			1 07072 11 0	486		
1 06462 01 0	232			1 " 21 0	390			1 " 20 0	421			1 " 14 0	487		
1 " 20 0	232			1 " 22 0	390			1 07023 00 0	136			1 " 20 0	487		
1 06463 05 0	234			1 06490 00 0	392			1 07024 00 1	315			1 " 21 0	487		
1 " 06 0	234			1 " 01 0	392			1 " 00 2	315			1 " 25 0	487		
1 " 07 0	234			1 " 02 0	394			1 07025 00 0	167			1 " 26 0	488		
1 " 09 0	234			1 " 10 0	392			1 " 10 0	136			1 " 27 0	488		
1 " 16 0	235			1 " 50 0	392			1 07027 00 0	233			1 " 28 0	488		
1 " 17 0	235			1 " 51 0	392			1 07028 00 0	233			1 " 31 0	488		
1 " 21 0	235			1 " 52 0	392			1 " 10 0	233			1 " 32 0	488		
1 " 22 0	235			1 " 53 0	392			1 07032 00 0	317			1 " 33 0	489		
1 " 23 0	235			1 06510 00 0	312			1 07047 00 0	233			1 " 34 0	489		
1 " 24 0	236			1 " 10 0	400			1 07054 00 0	326			1 " 70 0	487		
1 " 25 0	236			1 06511 00 0	232			1 07055 00 0	326			1 " 71 0	487		
1 " 31 0	236			1 06515 00 0	400			1 07056 00 0	167			1 " 75 0	487		
1 " 32 0	236			1 " 15 0	400			1 07058 00 0	167			1 " 76 0	488		
1 " 33 0	236			1 06520 00 1	366			1 07060 01 0	351			1 " 77 0	488		
1 " 34 0	236			1 " 01 1	366			1 07061 00 1	167			1 " 78 0	488		
1 " 35 0	236			1 " 10 1	366			1 " 00 2	167			1 07073 20 0	423		
1 06465 02 0	236			1 " 11 1	366			1 " 01 1	167			1 " 21 0	424		
1 " 03 0	237			1 " 50 1	366			1 " 01 2	167			1 07074 70 0	421	492	1
1 " 05 0	237			1 " 51 1	366			1 " 10 0	167			1 " 71 0	421	492	1
1 " 06 0	237			1 " 55 1	366			1 07063 15 1	474	495	14	1 " 80 0	481	492	2
1 " 07 0	238			1 " 60 1	366			1 " 15 2	474	495	14	1 07076 11 0	424		
1 " 08 0	238			1 " 61 1	366			1 " 20 0	474	495	14	1 " 13 0	424		
1 " 10 0	238			1 " 65 1	366			1 " 21 0	477	495	14	1 " 14 0	424		
1 " 21 0	238			1 06521 50 1	366			1 " 26 1	472	494	13	1 " 15 0	424		
1 " 22 0	239			1 06522 00 0	366			1 " 26 1 C2	472	494	13	1 " 16 0	424		
1 " 23 0	239			1 06525 00 0	351			1 " 26 2	472	494	13	1 " 65 0	425		
1 " 24 0	239			1 " 01 0	351			1 " 26 2 C2	472	494	13	1 " 66 0	426		
1 " 25 0	239			1 " 02 0	351			1 " 30 0	474	495	14	1 " 70 0	464		
1 06466 01 0	389			1 06526 00 0	351			1 " 31 0	477	495	14	1 " 70 0 C2	464		
1 " 02 0	389			1 06527 00 0	351			1 " 35 1	474	495	14	1 " 71 0	464		
1 06472 00 0	391			1 06601 80 0	127			1 " 35 2	474	495	14	1 " 71 0 C2	464		
1 " 10 0	391			1 " 90 0	127			1 " 36 1	477	495	14	1 07077 14 0	489		
1 " 40 0	391			1 06610 50 0	530			1 " 36 2	477	495	14	1 " 14 0 C2	489		
1 " 50 0	391			1 06740 00 0	400			1 " 40 0	474	495	14	1 " 15 0	489		
1 " 51 0	391			1 07007 13 0	422			1 " 41 0	477	495	14	1 " 15 0 C2	489		
1 06473 00 0	391			1 " 14 0	422			1 " 51 0	471	494	13	1 " 46 0	480	492	3
1 " 10 0	391			1 " 15 0	422			1 " 51 0 C2	471	494	13	1 " 46 0 C2	480	492	3
1 " 20 0	232			1 " 60 0	422			1 " 61 0	471	494	13	1 " 47 0	480	492	4
1 " 20 0 B1	232			1 " 61 0	422			1 " 61 0 C2	471	494	13	1 " 47 0 C2	480	492	4
1 " 30 0	232			1 " 62 0	422			1 " 66 1	472	494	13	1 " 48 0	480	492	5
1 " 30 0 B1	232			1 07009 00 0	312			1 " 66 1 C2	472	494	13	1 " 48 0 C2	480	492	5
1 " 50 0	391			1 07012 00 0	312			1 " 66 2	472	494	13	1 " 49 0	480	492	6
1 " 51 0	392			1 07013 00 0	233			1 " 66 2 C2	472	494	13	1 " 49 0 C2	480	492	6
1 06480 00 0	390			1 07017 10 1	312			1 " 71 0	472	494	13	1 07078 28 0	479	493	7
1 " 01 0	390			1 " 10 2	312			1 " 71 0 C2	472	494	13	1 " 28 0 C2	479	493	7
1 " 02 0	390			1 07018 00 1	166			1 07064 51 0	472	494	13	1 " 29 0	479	493	8
1 " 10 0	390			1 " 00 2	166			1 " 51 0 C2	472	494	13	1 " 29 0 C2	479	493	8
1 " 11 0	390			1 " 00 3	166			1 " 60 0	475	495	14	1 07081 06 0	475	495	14
1 " 12 0	390			1 " 00 4	166			1 " 61 0	478	495	14	1 " 12 0	425		
1 " 20 0	390			1 " 10 3	313			1 " 71 0	472	494	13	1 " 61 0	478	495	14

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 07083 15 0	482	493	9	1 07118 00 2	313			1 07179 10 0	332			1 07552 84 0	542		
1 " 16 0	482	493	9	1 " 01 1	313			1 07206 00 0	465			1 " 85 0	542		
1 " 17 0	482	493	9	1 " 01 2	313			1 " 01 0	319			1 " 86 0	542		
1 " 25 0	482	493	9	1 07120 00 1	314			1 07209 00 0	506			1 07553 01 0	542		
1 " 35 0	482	493	9	1 " 00 2	314			1 " 01 0	506			1 " 02 0	542		
1 " 36 0	482	493	9	1 " 01 1	314			1 " 02 0	505			1 " 03 0	542		
1 " 50 0	426			1 " 01 2	314			1 " 21 0	506			1 " 04 0	542		
1 " 51 0	426			1 07123 00 0	514			1 07210 01 0	513			1 " 51 0	542		
1 " 52 0	426			1 07124 00 0	514			1 07430 31 0	532			1 07554 01 0	542		
1 " 53 0	426			1 " 50 0	514			1 " 32 0	533			1 " 02 0	542		
1 " 65 0	482	493	9	1 07125 00 0	532			1 07550 01 0	553			1 " 03 0	542		
1 " 66 0	482	493	9	1 " 01 0	532			1 " 02 0	553			1 " 05 0	542		
1 " 67 0	482	493	9	1 07126 01 0	427			1 " 04 0	553			1 " 51 0	542		
1 " 70 0	426			1 07128 00 0	233			1 " 05 0	553			1 " 71 0	543		
1 " 76 0	482	493	9	1 07132 00 0 97	510			1 " 08 0	553			1 " 72 0	543		
1 " 77 0	482	493	9	1 07133 00 0 97	510			1 " 10 0	553			1 " 73 0	543		
1 07084 10 0	490			1 07134 00 0 97	510			1 " 11 0	95			1 " 91 0	543		
1 " 11 0	490			1 07135 00 0 97	510			1 " 12 0	103			1 " 92 0	543		
1 " 20 0	490			1 07141 01 0 97	511			1 07551 01 0	541			1 07555 01 0	543		
1 " 21 0	490			1 07142 01 0 97	511			1 " 02 0	541			1 " 02 0	543		
1 07085 75 0	426			1 07153 02 0 97	511			1 " 03 0	541			1 " 03 0	543		
1 " 76 0	426			1 " 03 0 97	511			1 " 04 0	541			1 " 04 0	543		
1 " 77 0	464			1 " 04 0 97	511			1 " 05 0	541			1 " 05 0	543		
1 07086 00 0	233			1 " 05 0 97	511			1 " 06 0	541			1 " 11 0	543		
1 " 01 0	233			1 " 06 0 97	512			1 " 11 0	541			1 " 12 0	543		
1 07088 00 0	222			1 07155 10 0 97	512			1 " 12 0	541			1 " 13 0	543		
1 " 03 0	168			1 " 11 0 97	512			1 " 13 0	541			1 " 14 0	543		
1 " 04 0	168			1 " 12 0 97	512			1 " 14 0	541			1 " 21 0	543		
1 " 04 0 00CG	168			1 " 13 0 97	512			1 " 15 0	541			1 " 22 0	543		
1 " 05 0	168			1 " 14 0 97	512			1 " 16 0	541			1 " 23 0	543		
1 07089 02 0	490			1 " 15 0 97	512			1 " 17 0	541			1 " 24 0	543		
1 " 50 0	426			1 " 20 0 97	513			1 " 18 0	541			1 " 25 0	543		
1 07090 01 0	484			1 " 21 0 97	513			1 " 41 0	541			1 " 26 0	543		
1 " 01 0 C2	484			1 07165 00 0	106			1 " 42 0	541			1 " 31 0	543		
1 " 05 0	484			1 " 01 0	106			1 " 43 0	541			1 " 32 0	543		
1 " 05 0 C2	484			1 " 02 0	106			1 " 44 0	541			1 " 33 0	543		
1 " 10 0	484			1 " 03 0	106			1 " 45 0	541			1 " 34 0	543		
1 " 10 0 C2	484			1 " 04 0	106			1 " 51 0	541			1 " 35 0	543		
1 " 50 0	415			1 " 21 0	490			1 " 52 0	541			1 " 36 0	543		
1 07091 01 0	485			1 " 50 0	490			1 " 53 0	541			1 " 51 0	543		
1 " 01 0 C2	485			1 " 51 0	491			1 " 54 0	541			1 " 52 0	543		
1 " 02 0	485			1 " 51 0 C2	491			1 " 55 0	541			1 " 53 0	543		
1 " 02 0 C2	485			1 07173 00 0	330			1 " 56 0	541			1 " 54 0	543		
1 " 03 0	485			1 07174 00 0	330			1 " 71 0	541			1 " 55 0	543		
1 " 50 0	415			1 " 00 0 82	330			1 " 72 0	541			1 " 61 0	543		
1 07095 00 0	531			1 " 00 0 87	330			1 " 73 0	541			1 " 62 0	543		
1 07108 00 0	531			1 07175 00 0	331			1 " 74 0	541			1 " 63 0	543		
1 07109 00 0	531			1 " 00 0 82	331			1 " 75 0	541			1 " 64 0	543		
1 " 01 0	531			1 " 00 0 87	331			1 " 76 0	541			1 07556 03 0	544		
1 " 03 0	531			1 07176 00 0	331			1 " 79 0	541			1 " 04 0	544		
1 07110 00 0	514			1 " 10 0	331			1 07552 01 0	541			1 " 05 0	544		
1 07111 00 2	514			1 " 61 0	465			1 " 02 0	541			1 " 06 0	544		
1 07112 00 1	514			1 " 61 0 C2	465			1 " 03 0	541			1 07557 01 0	544		
1 07113 00 0	514			1 " 62 0	465			1 " 04 0	542			1 " 02 0	544		
1 07114 00 0	531			1 " 62 0 C2	465			1 " 51 0	542			1 " 03 0	544		
1 " 05 0	531			1 " 63 0	465			1 " 71 0	542			1 " 11 0	544		
1 " 06 0	531			1 " 63 0 C2	465			1 " 72 0	542			1 " 52 0	544		
1 " 11 0	532			1 " 66 0	465			1 " 73 0	542			1 07558 01 0	544		
1 " 12 0	531			1 " 66 0 C2	465			1 " 74 0	542			1 " 02 0	544		
1 " 15 0	531			1 07177 00 0	331			1 " 75 0	542			1 " 03 0	544		
1 " 16 0	532			1 " 10 0	331			1 " 76 0	542			1 " 05 0	544		
1 " 17 0	532			1 07178 00 0	332			1 " 81 0	542			1 07559 01 0	553		
1 07115 00 0	514			1 " 10 0	332			1 " 82 0	542			1 " 02 0	553		
1 07118 00 1	313			1 07179 00 0	332			1 " 83 0	542			1 " 03 0	554		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 07559 04 0	554			1 07572 81 0	545			1 07581 13 0	95			1 07590 30 0	550		
1 " 05 0	554			1 " 82 0	545			1 " 14 0	95			1 " 35 0	550		
1 " 06 0	554			1 " 83 0	545			1 " 15 0	95			1 " 36 0	550		
1 " 07 0	554			1 " 84 0	545			1 " 16 0	95			1 " 37 0	550		
1 " 09 0	554			1 " 85 0	545			1 " 17 0	95			1 " 38 0	551		
1 " 11 0	554			1 " 87 0	547			1 " 20 0	95			1 " 45 0	551		
1 " 12 0	554			1 " 88 0	547			1 " 21 0	95			1 07591 01 0	551		
1 " 13 0	554			1 " 89 0	546			1 " 22 0	95			1 " 05 0	551		
1 " 19 0	554			1 " 91 0	546			1 " 23 0	95			1 " 12 0	551		
1 " 22 0	554			1 " 92 0	546			1 " 24 0	95			1 " 15 0	551		
1 " 23 0	554			1 " 93 0	547			1 " 25 0	95			1 " 21 0	552		
1 " 24 0	555			1 " 94 0	547			1 " 26 0	95			1 " 29 0	552		
1 " 25 0	555			1 " 95 0	547			1 " 30 0	95			1 " 39 0	552		
1 " 26 0	555			1 " 96 0	547			1 " 31 0	95			1 08210 01 0	51	107	9
1 " 28 0	555			1 07574 14 0	134			1 " 32 0	95			1 " 02 0	51	107	9
1 " 42 0	554			1 07580 01 0	94			1 " 33 0	95			1 " 05 0	51	107	9
1 " 48 0	554			1 " 02 0	94			1 " 40 0	95			1 " 06 0	51	107	9
1 " 62 0	553			1 " 03 0	94			1 " 41 0	95			1 " 12 0	51	107	9
1 " 63 0	554			1 " 06 0	94			1 " 42 0	95			1 " 13 0	51	107	9
1 " 80 0	555			1 " 07 0	94			1 " 43 0	95			1 " 14 0	51	107	9
1 " 81 0	555			1 " 08 0	94			1 " 50 0	95			1 " 16 0	51	107	9
1 " 83 0	555			1 " 11 0	94			1 " 51 0	95			1 " 18 0	51	107	9
1 " 84 0	555			1 " 12 0	94			1 " 52 0	95			1 08220 02 0	51	108	10
1 " 85 0	555			1 " 13 0	94			1 " 60 0	95			1 08230 02 0	51	108	11
1 07571 01 0	544			1 " 14 0	94			1 " 71 0	95			1 " 06 0	51	108	11
1 " 02 0	544			1 " 15 0	94			1 " 72 0	95			1 08325 02 0	57	108	12
1 " 03 0	544			1 " 16 0	94			1 07582 10 0	95			1 " 04 0	57	108	12
1 " 04 0	544			1 " 17 0	94			1 " 11 0	95			1 " 14 0	57	108	12
1 " 05 0	544			1 " 20 0	94			1 " 12 0	95			1 " 24 0	57	108	12
1 " 06 0	544			1 " 21 0	102			1 " 13 0	95			1 08359 09 0	57	108	14
1 " 11 0	544			1 " 22 0	102			1 " 14 0	95			1 " 10 0	57	108	14
1 " 12 0	544			1 " 23 0	102			1 " 15 0	95			1 " 11 0	57	108	14
1 " 13 0	544			1 " 24 0	102			1 " 16 0	95			1 08453 03 0 66	56	108	16
1 " 14 0	544			1 " 30 0	94			1 " 17 0	95			1 " 04 0 66	56	108	16
1 " 15 0	544			1 " 31 0	94			1 " 18 0	95			1 " 05 0 66	56	108	16
1 " 16 0	544			1 " 32 0	94			1 " 20 0	95			1 " 06 0 66	56	108	16
1 " 17 0	544			1 " 33 0	94			1 " 23 0	95			1 " 07 0 66	56	108	16
1 " 18 0	544			1 " 35 0	94			1 07586 04 0	130			1 " 09 0 66	56	108	16
1 " 41 0	545			1 " 40 0	94			1 " 05 0	130			1 " 10 0 66	56	108	16
1 " 42 0	545			1 " 41 0	94			1 " 06 1	130			1 " 11 0 66	56	108	16
1 " 43 0	545			1 " 42 0	94			1 " 06 2	130			1 " 12 0 66	56	108	16
1 " 44 0	545			1 " 45 0	94			1 " 07 1	130			1 " 13 0 66	56	108	16
1 " 45 0	545			1 " 46 0	94			1 " 07 2	130			1 " 14 0 66	56	108	16
1 " 71 0	545			1 " 50 0	102			1 " 08 0	130			1 " 17 0 66	56	108	16
1 " 72 0	545			1 " 51 0	102			1 " 09 0	130			1 " 18 0 66	56	108	16
1 " 73 0	545			1 " 52 0	102			1 07589 02 0	130			1 " 19 0 66	56	108	16
1 " 74 0	545			1 " 53 0	102			1 " 03 1	130			1 " 20 0 66	56	108	16
1 " 75 0	545			1 " 55 0	102			1 " 03 2	130			1 " 21 0 66	56	108	16
1 " 76 0	545			1 " 60 0	94			1 " 04 0	130			1 " 22 0 66	56	108	16
1 " 77 0	547			1 " 61 0	102			1 " 05 0	130			1 " 25 0 66	56	108	16
1 " 78 0	547			1 " 62 0	102			1 07590 01 0	548			1 " 26 0 66	56	108	16
1 " 93 0	547			1 " 70 0	102			1 " 05 0	548			1 " 27 0 66	56	108	16
1 " 94 0	547			1 07581 01 0	95			1 " 10 0	548			1 " 29 0 66	56	108	16
1 07572 01 0	545			1 " 02 0	95			1 " 12 0	548			1 " 31 0 66	56	108	16
1 " 02 0	545			1 " 03 0	95			1 " 15 0	548			1 " 32 0 66	56	108	16
1 " 03 0	545			1 " 04 0	95			1 " 18 0	548			1 " 33 0 66	56	108	16
1 " 71 0	547			1 " 05 0	95			1 " 21 0	549			1 " 34 0 66	56	108	16
1 " 72 0	547			1 " 06 0	95			1 " 23 0	549			1 " 35 0 66	56	108	16
1 " 73 0	547			1 " 07 0	95			1 " 24 0	549			1 " 36 0 66	56	108	16
1 " 74 0	545			1 " 08 0	95			1 " 25 0	549			1 " 37 0 66	56	108	16
1 " 75 0	547			1 " 09 0	95			1 " 26 0	549			1 " 38 0 66	56	108	16
1 " 76 0	545			1 " 10 0	95			1 " 27 0	549			1 " 39 0 66	56	108	16
1 " 77 0	547			1 " 11 0	95			1 " 28 0	550			1 " 40 0 66	56	108	16
1 " 78 0	547			1 " 12 0	95			1 " 29 0	550			1 " 41 0 66	56	108	16

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 08453 42 0 66	56	108	16	1 08815 32 0 12	64	108	17	1 11611 50 1	266	335	2	1 11761 80 1	137	170	2
1 " 43 0 66	56	108	16	1 " 35 0 12	64	108	17	1 " 50 2	266	335	2	1 " 80 2	137	170	2
1 " 44 0 66	56	108	16	1 " 36 0 12	64	108	17	1 " 60 1	266	335	2	1 11771 50 1	137	170	2
1 " 49 0 66	56	108	16	1 " 37 0 12	64	108	17	1 " 60 2	266	335	2	1 " 50 2	137	170	2
1 " 50 0 66	56	108	16	1 08835 02 0 12	64	108	13	1 " 70 1	266	335	2	1 " 60 1	137	170	2
1 " 67 0 66	56	108	16	1 " 03 0 12	64	108	13	1 " 70 2	266	335	2	1 " 60 2	137	170	2
1 08710 04 0	62	108	17	1 " 04 0 12	64	108	13	1 " 80 1	266	335	2	1 " 70 1	137	170	2
1 " 05 0	62	108	17	1 " 07 0 12	64	108	13	1 " 80 2	266	335	2	1 " 70 2	137	170	2
1 " 06 0	62	108	17	1 " 09 0 12	64	108	13	1 11630 50 1	268	335	2	1 " 80 1	137	170	2
1 " 07 0	62	108	17	1 " 11 0 12	64	108	13	1 " 50 2	268	335	2	1 " 80 2	137	170	2
1 " 08 0	62	108	17	1 08857 03 0 12	65	108	12	1 " 50 3	267	335	3	1 11823 80 1	138	170	3
1 " 09 0	62	108	17	1 " 04 0 12	65	108	12	1 " 50 4	267	335	3	1 " 80 2	138	170	3
1 " 10 0	62	108	17	1 " 05 0 12	65	108	12	1 " 60 1	268	335	2	1 11921 50 1	138	170	1
1 " 11 0	62	108	17	1 " 07 0 12	65	108	12	1 " 60 2	268	335	2	1 " 50 2	138	170	1
1 " 12 0	62	108	17	1 " 10 0 12	65	108	12	1 " 60 3	267	335	3	1 " 50 3	138	170	4
1 " 13 0	62	108	17	1 " 11 0 12	65	108	12	1 " 60 4	267	335	3	1 " 50 4	138	170	4
1 " 14 0	62	108	17	1 " 12 0 12	65	108	12	1 " 70 1	268	335	2	1 " 60 1	138	170	1
1 " 15 0	62	108	17	1 " 13 0 12	65	108	12	1 " 70 2	268	335	2	1 " 60 2	138	170	1
1 " 16 0	62	108	17	1 " 17 0 12	65	108	12	1 " 80 1	268	335	2	1 " 60 3	138	170	4
1 " 17 0	62	108	17	1 " 18 0 12	65	108	12	1 " 80 2	268	335	2	1 " 60 4	138	170	4
1 " 18 0	62	108	17	1 " 25 0 12	65	108	12	1 11631 50 1	268	335	2	1 " 70 1	138	170	1
1 " 19 0	62	108	17	1 " 27 0 12	65	108	12	1 " 50 2	268	335	2	1 " 70 2	138	170	1
1 " 20 0	62	108	17	1 " 29 0 12	65	108	12	1 " 60 1	268	335	2	1 " 70 3	138	170	4
1 " 21 0	62	108	17	1 " 31 0 12	65	108	12	1 " 60 2	268	335	2	1 " 70 4	138	170	4
1 " 22 0	62	108	17	1 " 35 0 12	65	108	12	1 " 70 1	268	335	2	1 " 80 1	138	170	1
1 " 23 0	62	108	17	1 " 37 0 12	65	108	12	1 " 70 2	268	335	2	1 " 80 2	138	170	1
1 " 24 0	62	108	17	1 " 38 0 12	65	108	12	1 11670 50 1	267	335	4	1 " 80 3	138	170	4
1 " 25 0	62	108	17	1 " 40 0 12	65	108	12	1 " 50 2	267	335	4	1 " 80 4	138	170	4
1 " 26 0	62	108	17	1 " 41 0 12	65	108	12	1 " 60 1	267	335	4	1 11931 50 1	138	170	1
1 " 27 0	62	108	17	1 " 60 0 12	65	108	12	1 " 60 2	267	335	4	1 " 50 2	138	170	1
1 " 28 0	62	108	17	1 " 61 0 12	65	108	12	1 " 70 1	267	335	4	1 " 50 3	138	170	4
1 " 29 0	62	108	17	1 " 75 0 12	65	108	12	1 " 70 2	267	335	4	1 " 50 4	138	170	4
1 " 36 0	62	108	17	1 " 76 0 12	65	108	12	1 " 80 1	267	335	4	1 " 60 1	138	170	1
1 " 37 0	62	108	17	1 " 77 0 12	65	108	12	1 " 80 2	267	335	4	1 " 60 2	138	170	1
1 08730 02 0	62	108	13	1 " 78 0 12	65	108	12	1 11671 50 1	267	335	4	1 " 60 3	138	170	4
1 " 03 0	62	108	13	1 08887 04 0 12	65	108	15	1 " 50 2	267	335	4	1 " 60 4	138	170	4
1 " 04 0	62	108	13	1 " 12 0 12	65	108	15	1 " 60 1	267	335	4	1 " 70 1	138	170	1
1 " 07 0	62	108	13	1 " 30 0 12	65	108	15	1 " 60 2	267	335	4	1 " 70 2	138	170	1
1 " 11 0	62	108	13	1 " 53 0 12	65	108	15	1 " 70 1	267	335	4	1 " 70 3	138	170	4
1 08815 05 0 12	64	108	17	1 1A610 00 0	265	336	11	1 " 70 2	267	335	4	1 " 70 4	138	170	4
1 " 06 0 12	64	108	17	1 1A611 00 0	265	336	11	1 " 80 1	267	335	4	1 " 80 1	138	170	1
1 " 07 0 12	64	108	17	1 " 00 0 OODF	135	170	8	1 " 80 2	267	335	4	1 " 80 2	138	170	1
1 " 08 0 12	64	108	17	1 1A630 00 0	265	336	11	1 11721 50 1	137	170	1	1 " 80 3	138	170	4
1 " 09 0 12	64	108	17	1 1A631 00 0	265	336	11	1 " 50 2	137	170	1	1 " 80 4	138	170	4
1 " 10 0 12	64	108	17	1 1A721 00 0	135	170	8	1 " 60 1	137	170	1	1 12010 40 0	269	335	5
1 " 11 0 12	64	108	17	1 " 00 0 79	135	170	8	1 " 60 2	137	170	1	1 " 50 0	269	335	5
1 " 12 0 12	64	108	17	1 1A731 00 0	135	170	8	1 " 70 1	137	170	1	1 " 60 0	269	335	5
1 " 13 0 12	64	108	17	1 " 00 0 79	135	170	8	1 " 70 2	137	170	1	1 " 70 0	269	335	5
1 " 14 0 12	64	108	17	1 11610 50 1	266	335	2	1 " 80 1	137	170	1	1 12011 40 0	269	335	5
1 " 15 0 12	64	108	17	1 " 50 2	266	335	2	1 " 80 2	137	170	1	1 " 50 0	269	335	5
1 " 16 0 12	64	108	17	1 " 50 3	267	335	3	1 11731 50 1	137	170	1	1 " 60 0	269	335	5
1 " 17 0 12	64	108	17	1 " 50 4	267	335	3	1 " 50 2	137	170	1	1 " 70 0	269	335	5
1 " 18 0 12	64	108	17	1 " 60 1	266	335	2	1 " 60 1	137	170	1	1 12015 40 0	269	335	5
1 " 19 0 12	64	108	17	1 " 60 2	266	335	2	1 " 60 2	137	170	1	1 " 50 0	269	335	5
1 " 20 0 12	64	108	17	1 " 60 3	267	335	3	1 " 70 1	137	170	1	1 " 60 0	269	335	5
1 " 21 0 12	64	108	17	1 " 60 4	267	335	3	1 " 70 2	137	170	1	1 " 70 0	269	335	5
1 " 22 0 12	64	108	17	1 " 70 1	266	335	2	1 " 80 1	137	170	1	1 12016 40 0	269	335	5
1 " 24 0 12	64	108	17	1 " 70 2	266	335	2	1 " 80 2	137	170	1	1 " 50 0	269	335	5
1 " 25 0 12	64	108	17	1 " 70 3	267	335	3	1 11761 50 1	137	170	2	1 " 60 0	269	335	5
1 " 26 0 12	64	108	17	1 " 70 4	267	335	3	1 " 50 2	137	170	2	1 " 70 0	269	335	5
1 " 27 0 12	64	108	17	1 " 80 1	266	335	2	1 " 60 1	137	170	2	1 13010 10 1	268	335	6
1 " 28 0 12	64	108	17	1 " 80 2	266	335	2	1 " 60 2	137	170	2	1 " 10 2	268	335	6
1 " 29 0 12	64	108	17	1 " 80 3	267	335	3	1 " 70 1	137	170	2	1 " 11 1	268	335	6
1 " 30 0 12	64	108	17	1 " 80 4	267	335	3	1 " 70 2	137	170	2	1 " 11 2	268	335	6

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 13010 12 1	268	335	6	1 14512 90 0	182	255	6	1 16725 30 0	199	256	10	1 19636 25 0	203	256	14
1 " 12 2	268	335	6	1 15001 00 0 06	273	335	7	1 " 35 0	199	256	10	1 " 30 0	203	256	14
1 " 60 1	268	335	6	1 " 00 0 07	273	335	7	1 16766 28 0	367	402	5	1 " 35 0	203	256	14
1 " 60 2	268	335	6	1 15005 00 0 06	273	335	8	1 " 28 B	367	402	5	1 " 40 0	203	256	14
1 " 70 1	268	335	6	1 " 00 0 07	273	335	8	1 " 48 0	367	402	5	1 19638 25 0	204	256	14
1 " 70 2	268	335	6	1 15100 00 0	270	335	9	1 " 48 B	367	402	5	1 " 30 0	204	256	14
1 " 80 1	268	335	6	1 15101 00 0	270	335	9	1 16786 28 0	375	402	6	1 " 35 0	204	256	14
1 " 80 2	268	335	6	1 15102 00 0	270	335	9	1 " 28 B	375	402	6	1 " 40 0	204	256	14
1 " 90 1	268	335	6	1 15110 00 0	270	335	9	1 " 48 0	375	402	6	1 19726 25 0	206	256	14
1 " 90 2	268	335	6	1 15120 00 0	270	335	9	1 " 48 B	375	402	6	1 " 30 0	206	256	14
1 13100 65 0	407	428	2	1 15121 00 0	270	335	9	1 17352 10 0	214	256	11	1 " 35 0	206	256	14
1 13110 65 0	409	428	2	1 15122 00 0	270	335	9	1 " 90 0	214	256	11	1 " 40 0	206	256	14
1 13160 65 1	409	428	2	1 15130 00 0	270	335	9	1 17353 90 0	158	170	6	1 19728 25 0	206	256	14
1 " 65 2	409	428	2	1 15140 00 0	270	335	9	1 17357 10 0	214	256	12	1 " 30 0	206	256	14
1 14010 60 1	179	255	1	1 15150 00 0	271	335	9	1 " 11 0	214	256	12	1 " 35 0	206	256	14
1 " 60 2	179	255	1	1 15160 00 0	271	335	9	1 " 90 0	214	256	12	1 " 40 0	206	256	14
1 14011 60 1	179	255	1	1 15170 00 0	271	335	9	1 " 91 0	214	256	12	1 21010 20 0	112		
1 " 60 2	179	255	1	1 15180 00 0	271	335	9	1 17358 90 0	158	170	7	1 " 25 0	112		
1 14012 60 1	179	255	1	1 15200 00 0	271	336	1	1 17515 25 0	358	402	3	1 " 30 0	112		
1 " 60 2	179	255	1	1 15300 00 1	383	336	10	1 " 27 0	358	402	3	1 " 40 0	112		
1 14017 60 1	179	255	1	1 " 00 2	383	336	10	1 " 28 0	358	402	3	1 " 50 0	112		
1 " 60 2	179	255	1	1 15515 25 0	354	402	3	1 " 32 0	358	402	3	1 " 60 0	112		
1 14020 15 1	184	255	2	1 " 27 0	354	402	3	1 " 38 0	358	402	3	1 " 70 0	112		
1 " 15 2	184	255	2	1 " 28 0	354	402	3	1 " 47 0	358	402	3	1 21011 30 0	112		
1 " 18 1	184	255	2	1 " 28 B	352	402	3	1 " 48 0	358	402	3	1 " 40 0	112		
1 " 18 2	184	255	2	1 " 38 0	354	402	3	1 " 58 0	358	402	3	1 " 50 0	112		
1 14021 15 1	184	255	2	1 " 38 B	352	402	3	1 17535 28 0	360	402	4	1 21090 20 0	112		
1 " 15 2	184	255	2	1 " 47 0	354	402	3	1 " 48 0	360	402	4	1 " 25 0	112		
1 " 18 1	184	255	2	1 " 48 0	354	402	3	1 17665 27 A	362	402	3	1 " 30 0	112		
1 " 18 2	184	255	2	1 " 48 B	352	402	3	1 " 28 A	362	402	3	1 " 40 0	112		
1 14350 70 0	181	255	3	1 " 58 0	354	402	3	1 " 38 A	362	402	3	1 " 50 0	112		
1 " 80 0	181	255	3	1 " 58 B	352	402	3	1 " 47 A	362	402	3	1 " 60 0	112		
1 " 90 0	181	255	3	1 15535 28 0	356	402	4	1 " 48 A	362	402	3	1 21091 30 0	113		
1 14351 70 0	181	255	3	1 " 28 B	353	402	4	1 " 58 A	362	402	3	1 " 40 0	113		
1 " 80 0	181	255	3	1 " 48 0	356	402	4	1 17685 28 A	364	402	4	1 " 50 0	113		
1 " 90 0	181	255	3	1 " 48 B	353	402	4	1 " 48 A	364	402	4	1 21190 20 0	117		
1 14352 70 0	181	255	3	1 16205 25 0	190	255	7	1 17766 28 0	367	402	5	1 " 30 0	117		
1 " 80 0	181	255	3	1 " 30 0	190	255	7	1 " 48 0	367	402	5	1 " 40 0	117		
1 14450 70 0	181	255	4	1 " 35 0	190	255	7	1 17786 28 0	375	402	6	1 21610 50 0	114		
1 " 80 0	181	255	4	1 16215 25 0	190	255	8	1 " 48 0	375	402	6	1 " 63 0	114		
1 " 90 0	181	255	4	1 " 30 0	190	255	8	1 17966 28 A	368	402	5	1 " 70 0	114		
1 14451 70 0	181	255	4	1 " 35 0	190	255	8	1 " 48 A	368	402	5	1 " 90 0	114		
1 " 80 0	181	255	4	1 16217 25 0	190	255	8	1 17986 28 A	376	402	6	1 21710 30 0	115		
1 " 90 0	181	255	4	1 " 30 0	190	255	8	1 " 48 A	376	402	6	1 " 40 0	115		
1 14452 70 0	181	255	4	1 " 35 0	190	255	8	1 19225 25 0	201	256	13	1 " 50 0	115		
1 " 80 0	181	255	4	1 16225 25 0	191	255	9	1 " 30 0	201	256	13	1 " 60 0	115		
1 " 90 0	181	255	4	1 " 30 0	191	255	9	1 " 35 0	201	256	13	1 21711 40 0	115		
1 14460 70 0	181	255	5	1 " 35 0	191	255	9	1 " 40 0	201	256	13	1 21810 65 0	116		
1 " 80 0	181	255	5	1 16227 25 0	191	255	9	1 19426 25 0	203	256	14	1 " 80 0	116		
1 " 90 0	181	255	5	1 " 30 0	191	255	9	1 " 30 0	203	256	14	1 22010 15 0	118		
1 14461 70 0	181	255	5	1 " 35 0	191	255	9	1 " 35 0	203	256	14	1 " 20 0	118		
1 " 80 0	181	255	5	1 16325 25 0	148	170	5	1 " 40 0	203	256	14	1 " 25 0	118		
1 " 90 0	181	255	5	1 " 30 0	148	170	5	1 19436 25 0	203	256	14	1 " 30 0	118		
1 14462 70 0	181	255	5	1 " 35 0	148	170	5	1 " 30 0	203	256	14	1 " 40 0	118		
1 " 80 0	181	255	5	1 16425 25 0	195	256	10	1 " 35 0	203	256	14	1 " 50 0	118		
1 " 90 0	181	255	5	1 " 30 0	195	256	10	1 " 40 0	203	256	14	1 " 60 0	118		
1 14510 70 0	182	255	6	1 " 35 0	195	256	10	1 19526 25 0	206	256	14	1 22011 20 0	118		
1 " 80 0	182	255	6	1 16525 25 0	199	256	10	1 " 30 0	206	256	14	1 " 30 0	118		
1 " 90 0	182	255	6	1 " 30 0	199	256	10	1 " 35 0	206	256	14	1 " 31 0	118		
1 14511 70 0	182	255	6	1 " 35 0	199	256	10	1 " 40 0	206	256	14	1 " 40 0	118		
1 " 80 0	182	255	6	1 16625 25 0	195	256	10	1 19626 25 0	203	256	14	1 " 41 0	118		
1 " 90 0	182	255	6	1 " 30 0	195	256	10	1 " 30 0	203	256	14	1 " 50 0	118		
1 14512 70 0	182	255	6	1 " 35 0	195	256	10	1 " 35 0	203	256	14	1 " 52 0	118		
1 " 80 0	182	255	6	1 16725 25 0	199	256	10	1 " 40 0	203	256	14	1 26020 30 0	119		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 26020 40 0	119			1 28555 67 0	122			1 42030 50 0	142	171	17	1 43620 45 0	413	429	10
1 26021 40 0	119			1 " 75 0	122			1 42032 50 0	142	171	17	1 43630 25 0	413	429	10
1 26022 50 0	119			1 " 84 0	122			1 42110 30 0	143	171	18	1 " 30 0	413	429	10
1 " 60 0	119			1 " 85 0	122			1 42112 30 0	143	171	18	1 " 35 0	413	429	10
1 26810 55 0	120			1 28558 66 0	125			1 42120 30 0	143	171	18	1 " 40 0	413	429	10
1 28050 55 0	121			1 " 67 0	125			1 42122 30 0	143	171	18	1 " 45 0	413	429	10
1 " 56 0	121			1 " 75 0	125			1 42210 30 0	143	172	19	1 43631 25 0	413	429	10
1 " 57 0	121			1 " 84 0	125			1 42212 30 0	143	172	19	1 " 30 0	413	429	10
1 " 70 0	121			1 " 85 0	125			1 42310 50 0	143	172	20	1 " 35 0	413	429	10
1 " 71 0	121			1 28559 66 0 00CL	126			1 42312 50 0	143	172	20	1 " 40 0	413	429	10
1 " 72 0	121			1 " 67 0 00CL	126			1 42410 30 0	144	172	21	1 " 45 0	413	429	10
1 28052 55 0	123			1 " 75 0 00CL	126			1 42412 30 0	144	172	21	1 43632 25 0	413	429	10
1 " 56 0	123			1 " 84 0 00CL	126			1 42420 30 0	144	172	21	1 " 30 0	413	429	10
1 " 57 0	123			1 " 85 0 00CL	126			1 42422 30 0	144	172	21	1 " 35 0	413	429	10
1 " 70 0	123			1 30210 10 0 A3	293			1 42510 50 0	144	172	22	1 " 40 0	413	429	10
1 " 71 0	123			1 " 11 0 A3	293			1 42512 50 0	144	172	22	1 " 45 0	413	429	10
1 " 72 0	123			1 " 20 0 A3	294			1 43000 65 0	407	428	2	1 43650 25 0	414	429	11
1 28053 55 0	124			1 " 21 0 A3	294			1 43020 65 0	407	428	3	1 " 30 0	414	429	11
1 " 56 0	124			1 " 30 0 A3	294			1 43024 65 0	407	428	3	1 " 35 0	414	429	11
1 " 57 0	124			1 " 31 0 A3	294			1 43025 65 0	408	428	4	1 " 40 0	414	429	11
1 " 70 0	124			1 " 40 0 A3	295			1 43091 00 0	408	428	5	1 " 45 0	414	429	11
1 " 71 0	124			1 " 41 0 A3	295			1 43110 65 0	409	428	2	1 43660 25 0	414	429	11
1 " 72 0	124			1 30220 10 0	293			1 43114 65 0	410	428	2	1 " 30 0	414	429	11
1 28055 55 0	121			1 " 20 0	294			1 43115 65 0	410	428	6	1 " 35 0	414	429	11
1 " 56 0	121			1 " 30 0	294			1 43120 65 0	409	428	3	1 " 40 0	414	429	11
1 " 57 0	121			1 " 40 0	295			1 43130 65 0	409	428	3	1 " 45 0	414	429	11
1 " 70 0	121			1 41010 80 0	139	170	9	1 43190 65 0	410	428	7	1 43661 25 0	414	429	11
1 " 71 0	121			1 41110 60 0	139	171	10	1 " 95 0	410	428	7	1 " 35 0	414	429	11
1 " 72 0	121			1 " 60 1	139	171	10	1 43191 65 0	411	428	8	1 " 40 0	414	429	11
1 28058 56 0	125			1 " 60 2	139	171	10	1 " 95 0	411	428	8	1 " 45 0	414	429	11
1 " 57 0	125			1 41111 60 0	139	171	10	1 43225 30 0	449	493	10	1 43662 25 0	414	429	11
1 " 70 0	125			1 41210 78 0	139	171	11	1 " 35 0	449	493	10	1 " 30 0	414	429	11
1 " 71 0	125			1 41220 78 0	139	171	12	1 " 40 0	449	493	10	1 " 35 0	414	429	11
1 " 72 0	125			1 " 78 1	139	171	12	1 " 45 0	449	493	10	1 " 40 0	414	429	11
1 28059 55 0 00CL	126			1 " 78 2	139	171	12	1 43235 30 0	449	493	10	1 " 45 0	414	429	11
1 " 70 0 00CL	126			1 41221 78 0	139	171	12	1 " 35 0	449	493	10	1 43690 30 0	414	429	12
1 " 71 0 00CL	126			1 41230 78 0	139	171	12	1 " 40 0	449	493	10	1 " 40 0	414	429	12
1 " 72 0 00CL	126			1 " 78 1	139	171	12	1 " 45 0	449	493	10	1 " 60 0	414	429	12
1 28350 62 0	121			1 " 78 2	139	171	12	1 43236 30 0	449	493	10	1 " 75 0	414	429	12
1 " 73 0	121			1 41231 78 0	139	171	12	1 " 35 0	449	493	10	1 43725 30 0	447	494	12
1 28352 73 0	123			1 41310 78 0	139	171	12	1 " 40 0	449	493	10	1 " 35 0	447	494	12
1 28353 62 0	124			1 " 78 1	139	171	12	1 " 45 0	449	493	10	1 " 40 0	447	494	12
1 " 73 0	124			1 " 78 2	139	171	12	1 43250 25 0	451	428	9	1 " 45 0	447	494	12
1 28355 62 0	122			1 41311 78 0	139	171	12	1 43260 25 0	451	428	9	1 43735 30 0	447	494	12
1 " 73 0	122			1 41320 78 0	139	171	11	1 43261 25 0	451	428	9	1 " 35 0	447	494	12
1 28358 62 0	125			1 41410 78 0	139	171	11	1 43262 25 0	451	428	9	1 " 40 0	447	494	12
1 " 73 0	125			1 41420 78 0	139	171	12	1 43295 30 0	450	493	11	1 " 45 0	447	494	12
1 28359 62 0 00CL	126			1 " 78 1	139	171	12	1 " 40 0	450	493	11	1 43825 30 0	448	494	12
1 " 73 0 00CL	126			1 " 78 2	139	171	12	1 " 60 0	450	493	11	1 " 35 0	448	494	12
1 28550 66 0	122			1 41421 78 0	139	171	12	1 " 75 0	450	493	11	1 " 40 0	448	494	12
1 " 67 0	122			1 41510 78 0	140	171	11	1 43520 25 0	412	429	10	1 " 45 0	448	494	12
1 " 75 0	122			1 " 78 0 00TC	140	171	11	1 " 30 0	412	429	10	1 43835 30 0	448	494	12
1 " 84 0	122			1 " 78 0 00ZQ	140	171	11	1 " 35 0	412	429	10	1 " 35 0	448	494	12
1 " 85 0	122			1 41525 78 0	140	171	12	1 " 40 0	412	429	10	1 " 40 0	448	494	12
1 28552 67 0	123			1 " 78 1	140	171	12	1 " 45 0	412	429	10	1 " 45 0	448	494	12
1 " 75 0	123			1 " 78 2	140	171	12	1 43530 25 0	412	429	10	1 44010 02 0	60	108	18
1 " 84 0	123			1 41526 78 0	140	171	12	1 " 30 0	412	429	10	1 44011 02 0	60	108	18
1 " 85 0	123			1 41600 00 0	141	171	13	1 " 35 0	412	429	10	1 44110 60 0	179	264	16
1 28553 66 0	124			1 41620 00 0	141	171	14	1 " 40 0	412	429	10	1 44111 60 0	179	264	16
1 " 67 0	124			1 41650 00 0	141	171	15	1 " 45 0	412	429	10	1 44115 60 0	179	256	15
1 " 75 0	124			1 42010 50 0	142	171	16	1 43620 25 0	413	429	10	1 44116 60 0	179	256	15
1 " 84 0	124			1 42012 50 0	142	171	16	1 " 30 0	413	429	10	1 44120 60 0	179	256	16
1 " 85 0	124			1 42020 50 0	142	171	16	1 " 35 0	413	429	10	1 44121 60 0	179	256	16
1 28555 66 0	122			1 42022 50 0	142	171	16	1 " 40 0	413	429	10	1 44130 60 0	180	256	17

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 44131 60 0	180	256	17	1 44230 18 0	185	258	27	1 44461 70 0	183	258	34	1 46213 25 0	191	259	41
1 44140 60 0	180	257	18	1 " 25 0	185	258	27	1 " 80 0	183	258	34	1 " 30 0	191	259	41
1 44141 60 0	180	257	18	1 " 30 0	185	258	27	1 " 90 0	183	258	34	1 " 35 0	191	259	41
1 44145 60 0	180	257	19	1 " 35 0	185	258	27	1 44462 70 0	183	258	34	1 46215 25 0	192	259	42
1 44146 60 0	180	257	19	1 44231 15 0	185	258	27	1 " 80 0	183	258	34	1 " 30 0	192	259	42
1 44150 60 0	182	257	20	1 " 18 0	185	258	27	1 " 90 0	183	258	34	1 " 35 0	192	259	42
1 " 70 0	182	257	20	1 " 25 0	185	258	27	1 44470 70 0	183	258	35	1 46217 25 0	192	259	42
1 " 80 0	182	257	20	1 " 30 0	185	258	27	1 " 80 0	183	258	35	1 " 30 0	192	259	42
1 " 90 0	182	257	20	1 " 35 0	185	258	27	1 " 90 0	183	258	35	1 " 35 0	192	259	42
1 44151 60 0	182	257	20	1 44235 15 0	185	258	27	1 44471 70 0	183	258	35	1 46218 25 0	192	259	42
1 " 70 0	182	257	20	1 " 18 0	185	258	27	1 " 80 0	183	258	35	1 " 30 0	192	259	42
1 " 80 0	182	257	20	1 " 25 0	185	258	27	1 " 90 0	183	258	35	1 " 35 0	192	259	42
1 " 90 0	182	257	20	1 " 30 0	185	258	27	1 44650 20 0	187	259	36	1 46219 25 0	192	259	42
1 44152 70 0	182	257	20	1 " 35 0	185	258	27	1 " 20 0 20	187	259	36	1 " 30 0	192	259	42
1 " 80 0	182	257	20	1 44236 15 0	185	258	27	1 " 25 0	187	259	36	1 " 35 0	192	259	42
1 " 90 0	182	257	20	1 " 18 0	185	258	27	1 " 25 0 20	187	259	36	1 46220 25 0	192	259	43
1 44155 60 0	182	257	21	1 " 25 0	185	258	27	1 " 30 0	187	259	36	1 " 30 0	192	259	43
1 " 70 0	182	257	21	1 " 30 0	185	258	27	1 " 30 0 20	187	259	36	1 " 35 0	192	259	43
1 " 80 0	182	257	21	1 " 35 0	185	258	27	1 " 35 0	187	259	36	1 46222 25 0	192	259	43
1 " 90 0	182	257	21	1 44237 15 0	185	258	28	1 " 35 0 20	187	259	36	1 " 30 0	192	259	43
1 44156 60 0	182	257	21	1 44238 15 0	185	258	28	1 44660 20 0	187	259	36	1 " 35 0	192	259	43
1 " 70 0	182	257	21	1 44240 15 0	186	258	29	1 " 20 0 20	187	259	36	1 46225 25 0	193	259	44
1 " 80 0	182	257	21	1 " 18 0	186	258	29	1 " 25 0	187	259	36	1 " 30 0	193	259	44
1 " 90 0	182	257	21	1 " 25 0	186	258	29	1 " 25 0 20	187	259	36	1 " 35 0	193	259	44
1 44160 60 0	182	257	22	1 " 30 0	186	258	29	1 " 30 0	187	259	36	1 46227 25 0	193	259	44
1 " 70 0	182	257	22	1 " 35 0	186	258	29	1 " 30 0 20	187	259	36	1 " 30 0	193	259	44
1 " 80 0	182	257	22	1 44241 15 0	186	258	29	1 " 35 0	187	259	36	1 " 35 0	193	259	44
1 " 90 0	182	257	22	1 " 18 0	186	258	29	1 " 35 0 20	187	259	36	1 46230 25 0	193	260	45
1 44161 60 0	182	257	22	1 " 25 0	186	258	29	1 44665 20 0	187	259	36	1 " 30 0	193	260	45
1 " 70 0	182	257	22	1 " 30 0	186	258	29	1 " 25 0	187	259	36	1 " 35 0	193	260	45
1 " 80 0	182	257	22	1 " 35 0	186	258	29	1 " 30 0	187	259	36	1 46233 25 0	193	260	45
1 " 90 0	182	257	22	1 44242 15 0	186	258	29	1 " 35 0	187	259	36	1 " 30 0	193	260	45
1 44210 16 0	184	257	23	1 44245 15 0	186	258	29	1 44670 20 0	187	259	37	1 " 35 0	193	260	45
1 44217 15 0	184	257	24	1 " 18 0	186	258	29	1 " 25 0	187	259	37	1 46240 25 0	194	260	46
1 44218 15 0	184	257	24	1 " 25 0	186	258	29	1 " 30 0	187	259	37	1 " 30 0	194	260	46
1 44219 25 0	184	257	25	1 " 30 0	186	258	29	1 " 35 0	187	259	37	1 " 35 0	194	260	46
1 " 30 0	184	257	25	1 " 35 0	186	258	29	1 44680 20 0	188	259	38	1 46250 25 0	193	260	47
1 44220 15 0	184	257	25	1 44246 15 0	186	258	29	1 " 25 0	188	259	38	1 " 30 0	193	260	47
1 " 18 0	184	257	25	1 " 18 0	186	258	29	1 " 30 0	188	259	38	1 " 35 0	193	260	47
1 " 25 0	184	257	25	1 " 25 0	186	258	29	1 " 35 0	188	259	38	1 46252 25 0	194	260	47
1 " 30 0	184	257	25	1 " 30 0	186	258	29	1 45010 16 0	186	259	39	1 " 30 0	194	260	47
1 " 35 0	184	257	25	1 " 35 0	186	258	29	1 45012 16 0	186	259	39	1 " 35 0	194	260	47
1 " 35 0 00EN	184	257	25	1 44350 70 0	182	258	30	1 45027 16 0	186	259	39	1 46260 25 0	194	260	48
1 44221 15 0	184	257	25	1 44351 70 0	182	258	30	1 45100 30 0	188	262	72	1 " 30 0	194	260	48
1 " 18 0	184	257	25	1 44360 70 0	183	258	31	1 " 35 0	188	262	72	1 " 35 0	194	260	48
1 " 25 0	184	257	25	1 " 80 0	183	258	31	1 " 40 0	188	262	72	1 46265 25 0	189	260	49
1 " 30 0	184	257	25	1 " 90 0	183	258	31	1 " 45 0	188	262	72	1 " 30 0	189	260	49
1 " 35 0	184	257	25	1 44361 70 0	183	258	31	1 " 50 0	188	262	72	1 " 35 0	189	260	49
1 44224 25 0	185	257	25	1 " 80 0	183	258	31	1 " 60 0	188	262	72	1 46270 25 0	194	260	50
1 " 30 0	185	257	25	1 " 90 0	183	258	31	1 45110 30 0	188	262	72	1 " 30 0	194	260	50
1 44225 15 0	185	257	25	1 44362 70 0	183	258	31	1 " 35 0	188	262	72	1 " 35 0	194	260	50
1 " 18 0	185	257	25	1 " 80 0	183	258	31	1 " 40 0	188	262	72	1 46275 25 0	189	260	51
1 " 25 0	185	257	25	1 " 90 0	183	258	31	1 " 45 0	188	262	72	1 " 30 0	189	260	51
1 " 30 0	185	257	25	1 44370 70 0	183	258	32	1 " 50 0	188	262	72	1 " 35 0	189	260	51
1 " 35 0	185	257	25	1 " 80 0	183	258	32	1 " 60 0	188	262	72	1 46300 25 0	146	172	23
1 " 35 0 00EN	185	257	25	1 " 90 0	183	258	32	1 46200 25 0	189	259	40	1 " 30 0	146	172	23
1 44226 15 0	185	257	25	1 44371 70 0	183	258	32	1 " 30 0	189	259	40	1 " 35 0	146	172	23
1 " 18 0	185	257	25	1 " 80 0	183	258	32	1 " 35 0	189	259	40	1 46302 25 0	146	172	23
1 " 25 0	185	257	25	1 " 90 0	183	258	32	1 46210 25 0	191	259	41	1 " 30 0	146	172	23
1 " 30 0	185	257	25	1 44450 70 0	183	258	33	1 " 30 0	191	259	41	1 " 35 0	146	172	23
1 " 35 0	185	257	25	1 44451 70 0	183	258	33	1 " 35 0	191	259	41	1 46303 30 0	146	172	23
1 44227 15 0	185	257	26	1 44460 70 0	183	258	34	1 46212 25 0	191	259	41	1 46305 19 0	145	172	24
1 44228 15 0	185	257	26	1 " 80 0	183	258	34	1 " 30 0	191	259	41	1 " 25 0	145	172	24
1 44230 15 0	185	258	27	1 " 90 0	183	258	34	1 " 35 0	191	259	41	1 " 30 0	145	172	24

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 46307 19 0	145	172	24	1 49228 25 0	201	261	57	1 5C130 35 0	281	341	57	1 50110 60 2	274	336	12
1 " 25 0	145	172	24	1 " 30 0	201	261	57	1 " 40 0	281	341	57	1 " 70 1	274	336	12
1 46315 25 0	148	172	25	1 " 35 0	201	261	57	1 " 45 0	281	341	57	1 " 70 2	274	336	12
1 " 30 0	148	172	25	1 " 40 0	201	261	57	1 " 50 0	281	341	57	1 50111 40 1	274	336	12
1 " 35 0	148	172	25	1 49250 25 0	202	261	58	1 " 60 0	281	341	57	1 " 40 2	274	336	12
1 46320 25 0	149	172	26	1 " 30 0	202	261	58	1 " 70 0	281	341	57	1 " 50 1	274	336	12
1 " 30 0	149	172	26	1 " 35 0	202	261	58	1 5C140 35 0	281	341	58	1 " 50 2	274	336	12
1 " 35 0	149	172	26	1 " 40 0	202	261	58	1 " 40 0	281	341	58	1 " 60 1	274	336	12
1 46322 25 0	149	172	26	1 49426 25 0	205	261	59	1 " 45 0	281	341	58	1 " 60 2	274	336	12
1 " 30 0	149	172	26	1 " 30 0	205	261	59	1 " 50 0	281	341	58	1 " 70 1	274	336	12
1 " 35 0	149	172	26	1 " 35 0	205	261	59	1 " 60 0	281	341	58	1 " 70 2	274	336	12
1 46323 25 0	149	172	26	1 " 40 0	205	261	59	1 " 70 0	281	341	58	1 50120 40 1	274	336	12
1 46325 25 0	149	172	27	1 49436 25 0	205	261	59	1 5C150 40 0	282	341	57	1 " 40 2	274	336	12
1 " 30 0	149	172	27	1 " 30 0	205	261	59	1 " 45 0	282	341	57	1 " 50 1	274	336	12
1 " 35 0	149	172	27	1 " 35 0	205	261	59	1 " 50 0	282	341	57	1 " 50 2	274	336	12
1 46327 25 0	150	172	27	1 " 40 0	205	261	59	1 " 60 0	282	341	57	1 " 60 1	274	336	12
1 " 30 0	150	172	27	1 49526 25 0	207	261	59	1 " 70 0	282	341	57	1 " 60 2	274	336	12
1 " 35 0	150	172	27	1 " 30 0	207	261	59	1 5C170 35 0	282	341	57	1 " 70 1	274	336	12
1 46365 25 0	146	173	28	1 " 35 0	207	261	59	1 " 40 0	282	341	57	1 " 70 2	274	336	12
1 " 30 0	146	173	28	1 " 40 0	207	261	59	1 " 45 0	282	341	57	1 50121 40 1	274	336	12
1 " 35 0	146	173	28	1 49626 25 0	205	261	59	1 " 50 0	282	341	57	1 " 40 2	274	336	12
1 46375 25 0	147	173	29	1 " 30 0	205	261	59	1 " 60 0	282	341	57	1 " 50 1	274	336	12
1 " 30 0	147	173	29	1 " 35 0	205	261	59	1 " 70 0	282	341	57	1 " 50 2	274	336	12
1 " 35 0	147	173	29	1 " 40 0	205	261	59	1 5C611 35 0	283	341	57	1 " 60 1	274	336	12
1 46420 25 0	196	260	52	1 49636 25 0	205	261	59	1 " 40 0	283	341	57	1 " 60 2	274	336	12
1 " 30 0	196	260	52	1 " 30 0	205	261	59	1 " 45 0	283	341	57	1 " 70 1	274	336	12
1 " 35 0	196	260	52	1 " 35 0	205	261	59	1 " 50 0	283	341	57	1 " 70 2	274	336	12
1 46425 25 0	196	260	53	1 " 40 0	205	261	59	1 " 60 0	283	341	57	1 50125 60 1	277	336	12
1 " 30 0	196	260	53	1 49638 25 0	205	261	59	1 " 70 0	283	341	57	1 " 60 2	277	336	12
1 " 35 0	196	260	53	1 " 30 0	205	261	59	1 5C621 35 0	283	341	58	1 50126 60 1	275	336	12
1 46435 25 0	197	261	54	1 " 35 0	205	261	59	1 " 40 0	283	341	58	1 " 60 2	275	336	12
1 " 30 0	197	261	54	1 " 40 0	205	261	59	1 " 45 0	283	341	58	1 " 70 1	275	336	12
1 " 35 0	197	261	54	1 49726 25 0	207	261	59	1 " 50 0	283	341	58	1 " 70 2	275	336	12
1 46445 25 0	197	261	55	1 " 30 0	207	261	59	1 " 60 0	283	341	58	1 50130 40 1	275	336	13
1 " 30 0	197	261	55	1 " 35 0	207	261	59	1 " 70 0	283	341	58	1 " 40 2	275	336	13
1 " 35 0	197	261	55	1 " 40 0	207	261	59	1 5C631 35 0	283	341	57	1 " 50 1	275	336	13
1 46450 25 0	198	261	56	1 49728 25 0	207	261	59	1 " 40 0	283	341	57	1 " 50 2	275	336	13
1 " 30 0	198	261	56	1 " 30 0	207	261	59	1 " 45 0	283	341	57	1 " 60 1	275	336	13
1 " 35 0	198	261	56	1 " 35 0	207	261	59	1 " 50 0	283	341	57	1 " 60 2	275	336	13
1 46520 25 0	199	260	52	1 " 40 0	207	261	59	1 " 60 0	283	341	57	1 " 70 1	275	336	13
1 " 30 0	199	260	52	1 5C010 20 0	284	336	18	1 " 70 0	283	341	57	1 " 70 2	275	336	13
1 " 35 0	199	260	52	1 " 25 0	284	336	18	1 5C641 35 0	283	341	58	1 50131 40 1	275	336	13
1 46525 25 0	200	260	53	1 " 30 0	284	336	18	1 " 40 0	283	341	58	1 " 40 2	275	336	13
1 " 30 0	200	260	53	1 5C011 20 0	284	336	18	1 " 45 0	283	341	58	1 " 50 1	275	336	13
1 " 35 0	200	260	53	1 " 25 0	284	336	18	1 " 50 0	283	341	58	1 " 50 2	275	336	13
1 46550 25 0	200	261	56	1 " 30 0	284	336	18	1 " 60 0	283	341	58	1 " 60 1	275	336	13
1 " 30 0	200	261	56	1 5C021 20 0	284	337	19	1 " 70 0	283	341	58	1 " 60 2	275	336	13
1 " 35 0	200	261	56	1 " 25 0	284	337	19	1 5C651 35 0	283	341	57	1 " 70 1	275	336	13
1 46625 25 0	196	260	53	1 " 30 0	284	337	19	1 " 40 0	283	341	57	1 " 70 2	275	336	13
1 " 30 0	196	260	53	1 5C031 20 0	284	336	18	1 " 45 0	283	341	57	1 50141 40 1	275	336	13
1 " 35 0	196	260	53	1 " 25 0	284	336	18	1 " 50 0	283	341	57	1 " 40 2	275	336	13
1 46650 25 0	198	261	56	1 " 30 0	284	336	18	1 " 60 0	283	341	57	1 " 50 1	275	336	13
1 " 30 0	198	261	56	1 5C110 35 0	281	341	57	1 " 70 0	283	341	57	1 " 50 2	275	336	13
1 " 35 0	198	261	56	1 " 40 0	281	341	57	1 5C671 35 0	283	341	57	1 " 60 1	275	336	13
1 46725 25 0	200	260	53	1 " 45 0	281	341	57	1 " 40 0	283	341	57	1 " 60 2	275	336	13
1 " 30 0	200	260	53	1 " 50 0	281	341	57	1 " 45 0	283	341	57	1 " 70 1	275	336	13
1 " 35 0	200	260	53	1 " 60 0	281	341	57	1 " 50 0	283	341	57	1 " 70 2	275	336	13
1 46750 25 0	200	261	56	1 " 70 0	281	341	57	1 " 60 0	283	341	57	1 50160 40 1	275	336	14
1 " 30 0	200	261	56	1 5C120 35 0	281	341	58	1 " 70 0	283	341	57	1 " 40 2	275	336	14
1 " 35 0	200	261	56	1 " 40 0	281	341	58	1 50110 40 1	274	336	12	1 " 50 1	275	336	14
1 49225 25 0	201	261	57	1 " 45 0	281	341	58	1 " 40 2	274	336	12	1 " 50 2	275	336	14
1 " 30 0	201	261	57	1 " 50 0	281	341	58	1 " 50 1	274	336	12	1 " 60 1	275	336	14
1 " 35 0	201	261	57	1 " 60 0	281	341	58	1 " 50 2	274	336	12	1 " 60 2	275	336	14
1 " 40 0	201	261	57	1 " 70 0	281	341	58	1 " 60 1	274	336	12	1 50161 40 1	276	336	14






ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 56505 38 B	352	402	7	1 56786 28 0	377	403	12	1 57033 60 0	298	339	43	1 57220 51 0	301	340	49
1 " 48 0	354	402	7	1 " 28 B	377	403	12	1 57035 60 0	157	174	42	1 " 60 0	301	340	49
1 " 48 B	354	402	7	1 " 48 0	377	403	12	1 " 62 0	157	174	42	1 " 61 0	301	340	49
1 " 58 0	354	402	7	1 " 48 B	377	403	12	1 " 70 0	157	174	42	1 57223 40 0	157	174	43
1 56515 25 0	354	402	8	1 56787 28 0	378	403	12	1 " 72 0	157	174	42	1 " 42 0	157	174	43
1 " 27 0	354	402	8	1 " 28 B	378	403	12	1 57110 60 1	303	339	44	1 " 45 0	157	174	43
1 " 28 0	354	402	8	1 56788 28 0	378	403	12	1 " 60 2	303	339	44	1 " 47 0	157	174	43
1 " 28 B	352	402	8	1 " 28 B	378	403	12	1 57115 60 1	303	339	44	1 " 50 0	157	174	43
1 " 32 0	354	402	8	1 " 48 0	378	403	12	1 " 60 2	303	339	44	1 " 52 0	157	174	43
1 " 38 0	354	402	8	1 " 48 B	378	403	12	1 57120 60 1	303	339	44	1 " 60 0	157	174	43
1 " 38 B	352	402	8	1 56815 27 0	347	402	8	1 " 60 2	303	339	44	1 " 62 0	157	174	43
1 " 48 0	354	402	8	1 " 28 0	347	402	8	1 57125 60 1	304	339	44	1 57225 45 0	301	340	50
1 " 48 B	352	402	8	1 " 38 0	347	402	8	1 " 60 2	304	339	44	1 " 46 0	301	340	50
1 " 58 0	354	402	8	1 " 47 0	347	402	8	1 57130 60 1	303	339	44	1 " 50 0	301	340	50
1 " 58 B	352	402	8	1 " 48 0	347	402	8	1 " 60 2	303	339	44	1 " 51 0	301	340	50
1 56525 28 0	356	402	9	1 " 58 0	347	402	8	1 57135 60 1	304	339	44	1 " 60 0	301	340	50
1 " 28 B	353	402	9	1 56835 28 0	348	403	10	1 " 60 2	304	339	44	1 " 61 0	301	340	50
1 " 48 0	356	402	9	1 " 48 0	348	403	10	1 57150 60 1	303	339	44	1 57226 45 0	157	174	44
1 " 48 B	353	402	9	1 56916 27 0	345	402	8	1 " 60 2	303	339	44	1 " 47 0	157	174	44
1 56535 28 0	356	403	10	1 " 28 0	345	402	8	1 57155 60 1	303	339	44	1 " 50 0	157	174	44
1 " 28 B	353	403	10	1 " 38 0	345	402	8	1 " 60 2	303	339	44	1 " 52 0	157	174	44
1 " 48 0	356	403	10	1 " 47 0	345	402	8	1 57160 60 1	303	339	44	1 " 60 0	157	174	44
1 " 48 B	353	403	10	1 " 48 0	345	402	8	1 " 60 2	303	339	44	1 " 62 0	157	174	44
1 56615 27 0	354	402	8	1 " 58 0	345	402	8	1 57165 60 1	304	339	44	1 57230 45 0	301	340	51
1 " 28 0	354	402	8	1 56917 27 0	345	402	8	1 " 60 2	304	339	44	1 " 46 0	301	340	51
1 " 47 0	354	402	8	1 " 28 0	345	402	8	1 57170 60 1	303	339	44	1 " 50 0	301	340	51
1 " 48 0	354	402	8	1 " 38 0	345	402	8	1 " 60 2	303	339	44	1 " 51 0	301	340	51
1 " 58 0	354	402	8	1 " 47 0	345	402	8	1 57175 60 1	304	339	44	1 " 60 0	301	340	51
1 56715 28 0	368	403	11	1 " 48 0	345	402	8	1 " 60 2	304	339	44	1 " 61 0	301	340	51
1 " 28 B	368	403	11	1 " 58 0	345	402	8	1 57190 00 0	304	339	45	1 57250 60 0	297	340	52
1 " 48 0	368	403	11	1 56936 28 0	346	403	10	1 57210 40 0	300	340	46	1 " 61 0	297	340	52
1 " 48 B	368	403	11	1 " 48 0	346	403	10	1 " 45 0	300	340	46	1 57255 60 0	297	340	53
1 56716 28 0	368	403	11	1 56937 28 0	348	403	10	1 " 50 0	300	340	46	1 " 61 0	297	340	53
1 " 28 B	368	403	11	1 " 48 0	348	403	10	1 " 60 0	300	340	46	1 57256 60 0	297	340	54
1 " 48 0	368	403	11	1 57010 50 0	296	339	39	1 57211 40 0	300	340	46	1 57260 60 0	299	341	55
1 " 48 B	368	403	11	1 " 51 0	296	339	39	1 " 41 0	300	340	46	1 " 61 0	299	341	55
1 56735 28 0	376	403	12	1 " 60 0	296	339	39	1 " 45 0	300	340	46	1 57265 60 0	299	341	56
1 " 28 B	376	403	12	1 " 61 0	296	339	39	1 " 46 0	300	340	46	1 " 61 0	299	341	56
1 " 48 0	376	403	12	1 " 70 0	296	339	39	1 " 50 0	300	340	46	1 57290 45 0	302	337	23
1 " 48 B	376	403	12	1 " 71 0	296	339	39	1 " 51 0	300	340	46	1 " 46 0	302	337	23
1 56736 28 0	376	403	12	1 57013 50 0 0030	156	174	39	1 " 60 0	300	340	46	1 " 50 0	302	337	23
1 " 28 B	376	403	12	1 " 52 0 0030	156	174	39	1 " 61 0	300	340	46	1 " 51 0	302	337	23
1 " 48 0	376	403	12	1 " 60 0 0030	156	174	39	1 57215 45 0	300	340	47	1 " 60 0	302	337	23
1 " 48 B	376	403	12	1 " 62 0 0030	156	174	39	1 " 46 0	300	340	47	1 " 61 0	302	337	23
1 56765 28 0	369	403	11	1 " 70 0 0030	156	174	39	1 " 50 0	300	340	47	1 57291 45 0	302	337	23
1 " 28 B	369	403	11	1 " 72 0 0030	156	174	39	1 " 51 0	300	340	47	1 " 46 0	302	337	23
1 " 48 0	369	403	11	1 57015 60 0	296	339	40	1 " 60 0	300	340	47	1 " 50 0	302	337	23
1 " 48 B	369	403	11	1 " 61 0	296	339	40	1 " 61 0	300	340	47	1 " 51 0	302	337	23
1 56766 28 0	369	403	11	1 " 70 0	296	339	40	1 57217 45 0	301	340	48	1 " 60 0	302	337	23
1 " 28 B	369	403	11	1 " 71 0	296	339	40	1 " 50 0	301	340	48	1 " 61 0	302	337	23
1 " 48 0	369	403	11	1 57016 60 0	156	174	40	1 " 60 0	301	340	48	1 57296 45 0	302	337	24
1 " 48 B	369	403	11	1 " 62 0	156	174	40	1 57218 45 0	333			1 " 46 0	302	337	24
1 56767 28 0	370	403	11	1 " 70 0	156	174	40	1 " 46 0	333			1 " 50 0	302	337	24
1 " 28 B	370	403	11	1 " 72 0	156	174	40	1 " 50 0	333			1 " 51 0	302	337	24
1 " 48 0	370	403	11	1 57020 60 0	296	339	41	1 " 51 0	333			1 " 60 0	302	337	24
1 " 48 B	370	403	11	1 " 61 0	296	339	41	1 " 60 0	333			1 " 61 0	302	337	24
1 56768 28 0	370	403	11	1 " 70 0	296	339	41	1 " 61 0	333			1 57298 45 0	333		
1 " 28 B	370	403	11	1 " 71 0	296	339	41	1 57219 45 0	333			1 " 46 0	333		
1 " 48 0	370	403	11	1 57028 50 0	298	339	42	1 " 50 0	333			1 " 50 0	333		
1 " 48 B	370	403	11	1 " 60 0	298	339	42	1 57220 40 0	301	340	49	1 " 51 0	333		
1 56785 28 0	377	403	12	1 57030 60 0	156	174	41	1 " 41 0	301	340	49	1 " 60 0	333		
1 " 28 B	377	403	12	1 " 62 0	156	174	41	1 " 45 0	301	340	49	1 " 61 0	333		
1 " 48 0	377	403	12	1 " 70 0	156	174	41	1 " 46 0	301	340	49	1 57299 45 0	334		
1 " 48 B	377	403	12	1 " 72 0	156	174	41	1 " 50 0	301	340	49	1 " 50 0	334		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 82010 80 0	520	537	1	1 82710 30 0	519	537	1								
1 " 81 0	520	537	1	1 " 31 0	519	537	1								
1 " 82 0	520	537	1	1 " 32 0	519	537	1								
1 " 90 0	520	537	1	1 " 40 0	519	537	1								
1 " 91 0	520	537	1	1 " 41 0	519	537	1								
1 " 92 0	520	537	1	1 " 42 0	519	537	1								
1 82050 34 0	526	538	2	1 " 50 0	519	537	1								
1 " 43 0	526	538	2	1 " 51 0	519	537	1								
1 " 53 0	526	538	2	1 " 52 0	519	537	1								
1 " 74 0	526	538	2	1 " 70 0	519	537	1								
1 " 85 0	526	538	2	1 " 71 0	519	537	1								
1 " 95 0	526	538	2	1 " 72 0	519	537	1								
1 82210 20 0	521	537	1	1 " 80 0	519	537	1								
1 " 21 0	521	537	1	1 " 81 0	519	537	1								
1 " 30 0	521	537	1	1 " 82 0	519	537	1								
1 " 31 0	521	537	1	1 " 90 0	519	537	1								
1 " 32 0	521	537	1	1 " 91 0	519	537	1								
1 " 40 0	521	537	1	1 " 92 0	519	537	1								
1 " 41 0	521	537	1	1 82750 34 0	524	538	2								
1 " 42 0	521	537	1	1 " 43 0	524	538	2								
1 " 50 0	521	537	1	1 " 53 0	524	538	2								
1 " 51 0	521	537	1	1 " 74 0	524	538	2								
1 " 52 0	521	537	1	1 " 85 0	524	538	2								
1 " 70 0	521	537	1	1 " 95 0	524	538	2								
1 " 71 0	521	537	1	1 82751 35 0	525	538	2								
1 " 72 0	521	537	1	1 " 75 0	525	538	2								
1 " 80 0	521	537	1	1 83000 40 0	522	538	3								
1 " 81 0	521	537	1	1 " 41 0	522	538	3								
1 " 82 0	521	537	1	1 83010 40 0	522	538	3								
1 " 90 0	521	537	1	1 83710 40 0	522	538	3								
1 " 91 0	521	537	1												
1 " 92 0	521	537	1												
1 82250 34 0	527	538	2												
1 " 43 0	527	538	2												
1 " 53 0	527	538	2												
1 " 74 0	527	538	2												
1 " 85 0	527	538	2												
1 " 95 0	527	538	2												
1 82410 20 0	521	537	1												
1 " 21 0	521	537	1												
1 " 30 0	521	537	1												
1 " 31 0	521	537	1												
1 " 32 0	521	537	1												
1 " 40 0	521	537	1												
1 " 41 0	521	537	1												
1 " 42 0	521	537	1												
1 " 50 0	521	537	1												
1 " 51 0	521	537	1												
1 " 52 0	521	537	1												
1 " 70 0	521	537	1												
1 " 71 0	521	537	1												
1 " 72 0	521	537	1												
1 " 80 0	521	537	1												
1 " 81 0	521	537	1												
1 " 82 0	521	537	1												
1 " 90 0	521	537	1												
1 " 91 0	521	537	1												
1 " 92 0	521	537	1												
1 82450 34 0	527	538	2												
1 " 43 0	527	538	2												
1 " 53 0	527	538	2												
1 " 74 0	527	538	2												
1 " 85 0	527	538	2												
1 " 95 0	527	538	2												



CISA™

Special executions













SPECIAL FINISHES	Nickel plated 12	Lacquered, brass-plated visible parts 38	Polished visible parts 66	Polished chrome plated 21
<p>CYLINDERS</p> <ul style="list-style-type: none"> • Single rim cylinders - Cam locks and furniture cylinders • Rim cylinder sets - Double cylinders (standard, with tumb turn shaft) • Single mortice cylinders (standard, with tumb turn shaft) • Double cylinders with round knob, Hotel Function <p>ROSES:</p> <ul style="list-style-type: none"> • 06010 - 06011 - 06012 - 06018 - 06027 • 06043 - 06081 - 06082 - 06083 - 06143.. <p>LOCKS (visible parts):</p> <ul style="list-style-type: none"> • 12010 - 12011 - 12015 - 12016 - 52010 - 52011 - 52021 - 52031 - 52210 - 52310 - 52520 - 52521 - 52526 . • 44010 - 44011 • 56250 - 56255 - 57010 - 57015 - 57210 - 57211 - 57215 - 57217 - 57220 - 57225 - 57250 - 57251 - 57255 - 57256 • 57020 - 57230 <p>STRIKERS</p> <ul style="list-style-type: none"> • <p>ACCESSORIES :</p> <ul style="list-style-type: none"> • Button art. 1.06110.00.0 	<p style="text-align: center;">TO BE DISCONTINUED</p> <ul style="list-style-type: none"> • • • • • • • • • • • • • • 	<ul style="list-style-type: none"> - - - - - - - - - - • - - - 	<ul style="list-style-type: none"> - • • - - - - - - - - - - - 	<ul style="list-style-type: none"> - - - • - - - - - - - - - -


<p>MORTICE LOCKS series 5C100</p> <ul style="list-style-type: none"> • Satin nickel plated brass (Fin. 12) <p>STRIKER FOR MORTICE LOCKS series 5C100</p> <ul style="list-style-type: none"> • Satin nickel plated brass (Fin. 12) 	<ul style="list-style-type: none"> • •
---	--










SPECIAL FINISHES	PAINTED	41	42	43	44	45	97	B9
	RAL COLORS	red RAL 3000	yellow RAL 1004	green RAL 6001	black RAL 9005	white RAL 9010	grey RAL 9006	steel grey


PANIC EXIT DEVICES	
<ul style="list-style-type: none"> • FAST Touch item 59811.10.0, 59711.00.0, 59711.10.0 <ul style="list-style-type: none"> - Red casing Black bar Fin. 41 - Yellow casing Black bar Fin. 42 - Green casing Black bar Fin. 43 - Black casing Black bar Fin. 44 - White casing White bar Fin. 45 - Grey casing Grey bar Fin. 97 - St. steel grey casing ... St. steel grey bar Fin. B9 	<ul style="list-style-type: none"> • • • • • - -
<ul style="list-style-type: none"> • FAST Touch item 59811.10.0.00.00.SB, 59711.00/10.0.00.00.SB, bar not supplied as stand. <ul style="list-style-type: none"> - Red casing Fin. 41 - Yellow casing Fin. 42 - Green casing Fin. 43 - Black casing Fin. 44 - White casing Fin. 45 - Grey casing Fin. 97 	<ul style="list-style-type: none"> • • • - • -
<ul style="list-style-type: none"> • Bar color options for item 1.06196.43.0 (matt black supplied standard) for FAST Touch panic exit devices item 59811.10.0.00.00.SB, 59711.00/10.0.00.00.SB <ul style="list-style-type: none"> - Satin finishe anodized aluminium Fin 62 - Anodized bronze Fin 64 - Brass plated Fin A1 - Red painted Fin 41 - Yellow painted Fin 42 - Green painted Fin 43 - White painted Fin 45 - Grey painted Fin 97 - Satin finished PVD coated stainless steel Fin C2 	<ul style="list-style-type: none"> • • • • • • • • •
<ul style="list-style-type: none"> • FAST Push series 59011, 59066 and Prestige series 59311 <ul style="list-style-type: none"> - Red casing Fin. 41 - Yellow casing Fin. 42 - Green casing Fin. 43 - White casing Fin. 45 - Grey casing Fin. 97 (*) Surcharge for Prestige series only - St. steel grey casing ... Fin. B9 	<ul style="list-style-type: none"> • • • • • •
<ul style="list-style-type: none"> • Additional locking points and components for FAST and Prestige series (fin. 44 for horizontal bar only) <ul style="list-style-type: none"> • Set of latchbolt item 1. 07063-20/30/35/40/51/61/66/71.0 • Inside plate item 07176.60/61/62/63/70/71.0 • Set for top rod extensions item 1.07081.06.0 • Kit of vertical rod item 1.07064.51/61.0 • Hold open devices item 1.07165.50/51.0 • Strikers series 07072 • Horizontal bar item 07007.13/14/15.0 • Outside operation devices item 07077, 07078 • Electric strikers item 07083.15-77.0 	<ul style="list-style-type: none"> • • • • • • • • •










SPECIAL KEYING ARRANGEMENTS	CISA Locking Line (padlocks)	CROSS KEY	STANDARD C2000
			
<p>KEYED ALIKE SYSTEMS</p> <p>A) KEY-CHANGES AT OUR CHOICE</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders..... - Rim locks with double cylinder, double cylinders, rim cylinder sets..... <p style="text-align: right;">KA</p> <p>KA WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)</p> <ul style="list-style-type: none"> - Less than standard number DEDUCTION (for each key), WHERE AVAILABLE - More than standard number SURCHARGE (for each key) <p>KA CODED (specify code in order)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, Single mortice cylinder single rim cylinders, cylinder with knob, cross key cylinder - Rim locks with double cylinder, double cylinders, , rim cylinder sets..... <p style="text-align: right;">KC</p> <p>(*) Cylinder supplied with one key.</p>	<p>•</p> <p>-</p> <p>•</p> <p>-</p> <p>•</p> <p>-</p>	<p>(*) •</p> <p>-</p> <p>(*) •</p> <p>-</p>	<p>•</p> <p>•</p> <p>-</p> <p>•</p> <p>•</p>
<p>MASTER KEY SYSTEMS</p> <p>Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, AP3 S and RS3 S serie)</p> <p>A) KEY-CHANGES AT OUR CHOICE</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob..... - Rim locks with double cylinder, double cylinders, rim cylinder sets..... <p style="text-align: right;">MK</p> <p>MK WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)</p> <ul style="list-style-type: none"> - Less than standard number DEDUCTION (for each key)..... - More than standard number SURCHARGE (for each key) <p>MK CODED FOR EXTENSIONS (specify system code in order)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob - Rim locks with double cylinder, double cylinders, rim cylinder sets. <p>B) MASTER KEY</p> <p>N.B. If requested: add surcharge for cylinder body numbering or special numberings.</p>	<p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p>	<p>-</p> <p>-</p> <p>-</p> <p>-</p>	<p>•</p> <p>•</p> <p>•</p> <p>•</p> <p>•</p> <p>•</p>


SP	Asix	Astral - Astral S		Astral Tekno	AP3 S	RS3 S
 Short key		 Short key	 Long key		 ALI	
TO BE DISCONTINUED • • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	TO BE DISCONTINUED • • • • • • • •	• • • • • • • •
• • • • • • • • • •	• • • • • • • • • •	• • • • • • • • • •	• • • • • • • • • •	• • • • • • • • • •	• • • • • • • • • •	• • • • • • • • • •











<p>SURCHARGES FOR SPECIAL KEYING ARRANGEMENTS</p>	<p>STANDARD C2000</p>
	
<p>GRAND (GMK) AND GREAT GRAND (GGMK) MASTER KEY SYSTEMS Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, AP3 S and RS3 S series</p> <p>A) KEY-CHANGES AT OUR CHOICE (GMK), (GGMK)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders - Rim locks with double cylinder, double cylinders, rim cylinder sets <p>GMK WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)</p> <ul style="list-style-type: none"> - Less than standard number DEDUCTION (for each key)..... - More than standard number SURCHARGE (for each key)..... <p>CODED FOR EXTENSIONS (specify system code in order) (GMK coded), (GGMK)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob..... - Rim locks with double cylinder, double cylinders, rim cylinder sets <p>B) MASTER KEY (GMK), (GGMK)</p> <p>N.B. If requested: add surcharge for cylinder body numbering or special numberings.</p> <p>master key systems with integrated keyway (only for Standard and C2000)</p>	<ul style="list-style-type: none"> • • • • • •
<p>1-2 SYSTEM PLUS CONSTRUCTION KEY (available with AP3 ALI and RS3 only) Standard supply 1+3+1: one ALI construction key (white-black wings), three ALI keys LEVEL 1 (red wings) , one ALI key LEVEL 2 (red-white wings) Each level is supplied with its specific Security Card Different number of keys can be supplied upon request.</p> <p style="text-align: right;">3C</p> <ul style="list-style-type: none"> - Single cylinders, cylinder with knob..... - Double cylinders 	
<p>1-2-3 SYSTEM PLUS CONSTRUCTION KEY (available with AP3 ALI and RS3 only) Standard supply 1+3+1: one ALI construction key (white-black wings), three ALI keys LEVEL 1 (red wings) , one ALI key LEVEL 2 (red-white wings) Each level is supplied with its specific Security Card Different number of keys can be supplied upon request.</p> <p style="text-align: right;">3L</p> <ul style="list-style-type: none"> - Single cylinders, cylinder with knob..... - Double cylinders 	


SP	Asix	Astral -Astral S		Astral Tekno	AP3 S	RS3 S
 Short key 		 Short key	 Long key		  TO BE DISCONTINUED	
• • • • • • •	- - - - - - -	• • • • • • •	• • • • • • •	• • • • • • •	• • • • • • •	• • • • • • •
- -	- -	- -	- -	- -	• •	• •
- -	- -	- -	- -	- -	• •	• •


<p>SPECIAL KEYING ARRANGEMENTS</p>	<p>STANDARD C2000</p>
	
<p>SURCHARGES FOR SPECIAL KEYING ARRANGEMENTS MK-CE Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, AP3 S and RS3 S series.</p> <p>OWNER / SERVICE SYSTEM (DADA SYSTEM on RS3 ALI and AP3 ALI)</p> <p style="text-align: right;">CE</p> <p>A) KEY-CHANGES AT OUR CHOICE</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders - Rim locks with double cylinder, double cylinders, rim cylinder set <p>B) CODED (specify system code or key bitting in order)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob - Rim locks with double cylinder, double cylinders, rim cylinder set <p>N.B. If requested: add surcharge for cylinder body numbering or special numberings.</p>	<ul style="list-style-type: none"> • • • •
<p>CONSTRUCTION KEY SYSTEMS:</p> <p style="text-align: right;">CA</p> <ul style="list-style-type: none"> • Master key systems (all surcharges must be added to specific surcharges for MK, GMK, GGMK and to the cylinder price). <i>The construction master key opens all the cylinder until the individual or master one is used, which cancels it definitively</i> <ul style="list-style-type: none"> - Single cylinder, cylinder with knob - Double cylinder - Master construction key <p>If Master Keys are not required, CISA recommends the "Single Cylinder"</p> • Single Cylinder (Surcharge must be added to the cylinder price as appropriate). Each cylinder has construction key (marked C) and 3 owner's key. The construction key opens the cylinder until the owner's one is used. <ul style="list-style-type: none"> - Single cylinder, cylinder with knob, (construction key included) - Double cylinder (construction key included) 	<ul style="list-style-type: none"> • • • - -
<p>DADA SYSTEM + CONSTRUCTION KEY for double cylinder locks (available with AP3 and RS3 with ALI keys only) Standard supply: three ALI keys (red wings) for the master key cylinder, three ALI keys (black wings) for the service key cylinder, one ALI construction key (white-black wings) working with both cylinders. Different number of keys can be supplied upon request:</p> <p style="text-align: right;">DA</p> <ul style="list-style-type: none"> - Single cylinder, mortice version, Cylinder with thumb turn (construction key included) - Double cylinder, mortice version (construction key included) 	


SP	Asix	Astral -Astral S		Astral Tekno	AP3 S	RS3 S
 Short key 		 Short key	 Long key		 ALI 	
• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •
• • • • •	- - -	• • • • •	• • • • •	• • • • •	• • • • •	• • • • •
- -	- -	- -	- -	- -	• •	• •


<p>KEYS OPTIONS</p>	<p>STANDARD C2000</p> 																				
<p>BITTED KEYS IN ADDITION TO STANDARD SUPPLY.</p> <p>A) 3 keys supply C3 (standard supply 2 keys) 5 keys supply C5 (standard supply 2 keys / 3 keys) different key supply CH (specify the total number of keys)</p> <p>NOTA BENE CYLINDERS ordered with 3 KEYS (standard supply: 3 keys) (*only padlocks)</p>	<p>• *</p> <p>-</p>																				
<p>CYLINDERS SUPPLIED WITH 3 LONG KEYS CL</p>	<p>-</p>																				
<p>KEY DUPLICATION AND SECURITY CARD.</p> <p>KEYS C2000, SP, ASIX, ASTRAL, ASTRAL-S ORDERED SEPARATELY BY QUOTING THE KEY BITTING CODE OR CODE CARD / ORDERED AS PER SAMPLE</p> <p>TSP KEYS ORDERED SEPARATELY WITH SECURITY CARD (TSP short key code 1.00500.01.1.00.00 KC), (TSP long key code 1.00500.90.1.00.00 KC).....</p> <p>SECURITY CARD TSP ORDERED ACCORDING TO EXISTING PROCEDURE 1.00500.80.0.00.00.KC.....</p> <p>ASTRAL TEKNO KEYS ORDERED SEPARATELY WITH SECURITY CARD (1.00690.00.0.00 CL.KC)</p> <p>SECURITY CARD ASTRAL TEKNO ORDERED ACCORDING TO EXISTING PROCEDURE 1.00690.80.0.00.00.KC</p> <p>RS3 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (RS3 S CODE 1.00800.00.0.00 CL.KC)</p> <p>SECURITY CARD RS3 S ORDERED ACCORDING TO EXISTING PROCEDURE 1.00800.80.0.00.00.KC</p> <p>AP3 KEYS ORDERED SEPARATELY WITH SECURITY CARD (AP3 code 1.00770.00.0.00.00 KC), (AP3 ALI code 1.00770.00.0.00.CL.KC)</p> <p>SECURITY CARD AP3 ORDERED ACCORDING TO EXISTING PROCEDURE 1.00770.80.0.00.00.KC</p> <p>NOTE</p> <ul style="list-style-type: none"> Copies of keys or of Security Cards TSP, AP3 and RS3 must be requested by submitting specific orders. Shipment by express courier. Any additional forwarding charges shall be at the customer's expense. Key delivery time: 5 working days from order date for orders up to 10pcs (shipment time excluded), for larger orders, delivery shall be agreed upon. <p>If a Security card is lost or stolen, we advise replacing the cylinder(s) to ensure the same level of security. We do not recommend ordering Security Card copies.</p>	<p>•</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p>																				
<ul style="list-style-type: none"> CYLINDERS WITH PERSONALIZED KEYWAY (specify on order form) PP <ul style="list-style-type: none"> Cylinders (for cylinder locks, order cylinder separately) Key <p>STANDARD, ASTRAL, ASTRAL-S, ASTRAL TEKNO Cylinders (min 300 pcs first order), 50 PCS SECOND ORDER</p> CYLINDERS WITH LEFT KEYWAY SX <ul style="list-style-type: none"> Cylinders..... KEY COINING (CS) OR INSERT (CP) FOR PERSONALIZED KEYBOW (ONE SIDE ONLY). <p>Minimum quantity:</p> <table border="0"> <tr> <td>- STANDARD, ASIX keys</td> <td>3.000 pcs.</td> <td>- STANDARD, ASIX cylinder</td> <td>1.000 pcs.</td> <td>CS</td> </tr> <tr> <td>- ASTRAL keys</td> <td>2.000 pcs.</td> <td>- ASTRAL cylinder</td> <td>1.000 pcs.</td> <td></td> </tr> <tr> <td>- AP3 S keys</td> <td>See Solution Partner program</td> <td>- AP3 S, RS3 S cylinder</td> <td>300 pcs.</td> <td></td> </tr> <tr> <td>- ASTRAL TEKNO keys</td> <td>500 pcs.</td> <td>- ASTRAL TEKNO cylinder</td> <td>300 pcs.</td> <td>CP</td> </tr> </table> 	- STANDARD, ASIX keys	3.000 pcs.	- STANDARD, ASIX cylinder	1.000 pcs.	CS	- ASTRAL keys	2.000 pcs.	- ASTRAL cylinder	1.000 pcs.		- AP3 S keys	See Solution Partner program	- AP3 S, RS3 S cylinder	300 pcs.		- ASTRAL TEKNO keys	500 pcs.	- ASTRAL TEKNO cylinder	300 pcs.	CP	<p>•</p> <p>•</p> <p>•</p>
- STANDARD, ASIX keys	3.000 pcs.	- STANDARD, ASIX cylinder	1.000 pcs.	CS																	
- ASTRAL keys	2.000 pcs.	- ASTRAL cylinder	1.000 pcs.																		
- AP3 S keys	See Solution Partner program	- AP3 S, RS3 S cylinder	300 pcs.																		
- ASTRAL TEKNO keys	500 pcs.	- ASTRAL TEKNO cylinder	300 pcs.	CP																	

SP		TSP		Asix	Astral-Astral S		Astral Tekno	AP3 S	RS3 S
 Short key	 Long key	 Short key	 Long key		 Short key	 Long key		 ALI	
•		-	-	-	•	•	•	•	•
-		-		•	-	-	•	•	•
-		-	-	-	-	•	-	-	-
•	•	-	-	•	•	•	-	-	-
-		•	•	-	-	-	-	-	-
-		•	•	-	-	-	-	-	-
-		-	-	-	-	-	•	-	-
-		-	-	-	-	-	•	-	-
-		-	-	-	-	-	-	-	•
-		-	-	-	-	-	-	-	•
-		-	-	-	-	-	-	•	-
-		-	-	-	-	-	-	•	-
•		-	-	-	•	•	•	•	-
•		-	-	-	•	•	•	•	-

SPECIAL KEYING ARRANGEMENTS	 DOUBLE-BIT KEY MORTICE LOCKS	
	SINGLE LOCKS	TWIN LOCKS
	KEYED ALIKE SYSTEMS A) KEY-CHANGES AT OUR CHOICE KA KA WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order) - Less than standard number DEDUCTION (for each key) - More than standard number SURCHARGE (for each key) B) CODED (specify system code or key biting in order) KC	• • • •

SURCHARGES FOR ADDITIONAL BITTED KEYS	 Key art.	
	BITTED KEYS IN ADDITION TO STANDARD SUPPLY - specify the total number of keys CH For REKEYABLE LOCKS " " For DOUBLE BIT CYLINDERS " " For DOUBLE BIT CYLINDERS for REKEYABLE locks " " "	00100 00101 00102 00104 00110 00112 00120 00121 00122 00123 00125 00162 00163 00162 00163 00162 00163

					
DOUBLE-BIT KEY MORTICE LOCKS		DOUBLE-BIT KEY RIM LOCKS and 6-LEVER ARMoured DOOR LOCKS		DOUBLE BIT CYLINDER for 6-LEVER DOUBLE-BIT KEY LOCKS	DOUBLE BIT CYLINDER for 6-LEVER DOUBLE-BIT KEY LOCKS, REKEYABLE
with KEY 00110		with KEY 00120-00123	with KEY 00125		
•		•	•	•	•
•		•	•	•	•
•		•	•	•	•
•		•	•	•	•

KEY DUPLICATION 00162, 00163 <i>(*) Keys duplicated by CISA only</i>				
	For REKEYABLE locks	For DOUBLE BIT CYLINDERS on 6-LEVER ARMoured DOOR LOCKS (*)		For DOUBLE BIT CYLINDERS on REKEYABLE LOCKS (*)
		KEYING ON SHAFT	KEYING ON SHAFT AND KEY BITS	KEYING ON SHAFT AND KEY BITS
A) Ordered separately by code	•	•	-	-
B) Ordered as per sample	•	-	•	•

NUMBERING	CN NUMBERING DEFINED BY CISA (with reference to the key bitting)	NPN NUMBERING DEFINED BY CUSTOMER
<ul style="list-style-type: none"> • PADLOCK..... • CYLINDER..... • 1 KEY..... 	<ul style="list-style-type: none"> • • • 	<ul style="list-style-type: none"> • • •

PRODUCTS WITH ARRANGEMENTS DIFFERENT THAN THE STANDARD ONE	
<p>PANIC EXIT DEVICES SERIES 59001, 59011, 59061, 59301, 59311, 59361, 59801, 59811</p> <ul style="list-style-type: none"> - Version with steel latches, for fire doors (Spec FR) - Additional locking points art. 1.07063.20/30/35/51/61/66.0 with steel latch bolt for fire resistant doors (Spec. FR) - Version with hold open device (Spec FG) - Version with microswitch (Spec LA) 	<ul style="list-style-type: none"> • • • •
<p>FLOOR HINGES</p> <ul style="list-style-type: none"> - Customer's brand on the plate free of charge for orders over 100 pcs - Contribution towards creating key coining for personalised brand on plates - Floor hinges without housing - Cam shaft with special pivot head 	<ul style="list-style-type: none"> • • •

LOCKS SUPPLIED WITH CYLINDERS OTHER THAN THE STANDARD ONE

RIM LOCKS WITH CYLINDER OR RIM CYLINDER SET IN FOLLOWING VERSIONS:

Asix

AX

- For all electric locks series 1A610, 1A611, 1A630, 1A631, 1A721, 1A731, 11610, 11611
- For locks series 50110, 50130, 54315, 54340, 54570, 50111, 50131, 54316, 54341

Astral - Astral S

AT

- For all electric locks series 1A600, 1A700, 11000 series 11823, 11670 excluded
- For all locks series 50000, series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

Astral Tekno

AK

- For all electric locks series 1A600, 1A700, 11000 esclude series 11823, 11670
- For all locks series 50000, series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

AP3

AP

- For all electric locks series 1A600, 1A700, 11000 series 11823 excluded
- For all locks series 50000 series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

TO BE DISCONTINUED

RS3 S

AS

- For all electric locks series 1A600, 1A700, 11000 item.1A630, 11630, 11635, 11660, 11670, 11731, 11823, 11931 excluded
- For all locks series 50000 items 50121, 50141, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50571 excluded.
- For all rim latches series 54000

LOCKS WITH FIXED EXTERNAL CYLINDER LONGER THAN STANDARD SIZE

N.B.: Order extension kit series 07165 (see cylinder accessories section of catalogue)

ELECTRIC LOCKS 24 V a.c. POWERED ELECTRIC LOCKS

N.B.: Use coil accessory (if available) or "booster" accessory item 1.07022.00

CYLINDERS AND PADLOCKS SUPPLIED IN SEMI-ASSEMBLED OR UNASSEMBLED VERSIONS

Cylinders and padlocks are available in **SEMI-ASSEMBLED** or **UNASSEMBLED** versions :

- **"SEMI - ASSEMBLED"**(ready for keying)
- **"UNASSEMBLED"** (completely unassembled)


In both cases, keys, pins, drivers, springs, pin hole plugs, circlips, are to be ordered separately.

CYLINDERS	SEMI-ASSEMBLED 90			UNASSEMBLED 91				
	STD	C2000	SP	STD	C2000	SP	Astral Astral-S	Astral Tekno
<ul style="list-style-type: none"> • Euro profile double cylinders • Euro profile single cylinders..... • Euro profile thumb turn cylinders • Rim cylinders, cam locks, furniture cylinders • Rim cylinder set • Hardened steel padlock cylinders 	TO BE DISCONTINUED	• • • • • •	TO BE DISCONTINUED	• • - - - -	• • • • • -	TO BE DISCONTINUED	• • • • • •	• • • • • •
BRASS PADLOCKS	SEMI-ASSEMBLED 90							
	STANDARD	LIM						
<ul style="list-style-type: none"> • 22010-30/40 • 22010-50/60 	• •	See PP						
<p>HARDENED STEEL PADLOCKS in "UNASSEMBLED" version 91</p> <p>- Hardened steel padlocks in UNASSEMBLED version are supplied without cylinder and without the cylinder and padlock drill resistant plate When ordering the padlock cylinder you must specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard)..</p>								
HARDENED STEEL PADLOCKS								
<ul style="list-style-type: none"> • 28050-55/56/57, 28350-62 • 28050-70/71/72, 28350-73, 28550-66/67/75/84/85 				• •				



Keys compatibility 40
 Key blanks - 1:1 scale 41


Double-bit key blanks 48



KEY BLANKS	CYLINDERS AND PADLOCKS
01060-10	41510 - 41525 - 41526
00770-00	0H112 - 0H149 - 0H155 - 0H210 - 0H310 - 0H311 - 0H312 - 0H314 - 0H317 - 0H350 - 0H351 - 0H352 - 0H357 - 0H410 - 0H510 - 0H610
00210-00/11	02400
00401-00	26020-50/60 - serie 28050 - 28350 - 28550 - 02650
00450-01/90	02163 - 02164 - 02172 - 02176 - 02179 - 02182 - 02502 - 02572 - 02652 - 08815 - 08835 08855 - 08857 - 08875 - 08887 - 72275 - 72276 - 28052 - 28352 - 28552
00500-01/90	02152 - 02162 - 02166 - 02169 - 02173 - 02174 - 02501 - 02562 - 02651 - 08810 - 08830 - 08850 - 08851 - 08870 - 08881 - 72270 72271 28051 - 28351 - 28551
00620-01/90	0A112 - 0A114 - 0A116 - 0A120 - 0A149 - 0A155 - 0A210 - 0A310 - 0A311 - 0A312 - 0A314 - 0A317 - 0A351 - 0A352 - 0A357 - 0A410 - 0A415 - 0A510 - 0A610 - 28053 - 28353 - 28553
01210-00	02520
01310-00/10/20/30/40	02102 - 02104 - 02106 - 02110 - 02139 - 02142 - 02145 - 02146 - 02500 - 02513 - 02550 - 02552 - 02592 - 02649 08710-07/08/10/12÷15/17÷30/35÷37/46 - 08730 22010-50/60 - 22011-50/52 - 22012-50 - 22013-50/60 - 72250
01070-10	0G300-07-08-10-12÷15-17÷70 - 0G301-07-12-13-26 - 0G304-02÷13-20-21 - 0G302 - 0G303 - 0G305 - 0G307 0G115 - 0G150 - 0G200 - 0G500 - 0G501
01320-00/10/20/30/40	02544-15 08710-04÷06/09/11/16 - 44010 - 44011
01070-05	0G300-04÷06-09/11/16 - 0G301-05-06-09-11 - 0G304-18
01330-00	02544-10/14 - 02126 - 02156
01070-01	0G300-02/03
01410-00	08210-02/05/06/12÷14/18 - 08220-02 - 08230-02/06 22010-40 - 22011-40/41 - 22012-40 - 22013-40 - 22070-40 - 26020-40 - 26021-40
01420-00	02040 - 02042 - 72010 - 72210 - 72215
01425-00	08210-01
01430-00	22010-30 - 22011-30/31 - 22012-30 - 22013-30 - 22070-30 - 26020-30
01440-00	22010-20/25 - 22011-20 - 22013-20/25 23010
01510-00	22010-115
01710-00	72350
00670-01	0E300 - 0E304 - 0E302 - 0E303 - 0E305 - 0E115 - 0E150 - 0E200 - 0E500 - 0E600 - 0E307
00690-00-0-00-CL	0M112 - 0M156 - 0M311 - 0M312 - 0M314 - 0M317 - 0M510 - 0M410 - 0M610

Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,004	50	1	01040 01 1				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,004	50	1	01040 02 1				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,010	50	1	01040 03 1				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,010	50	1	01040 04 1				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,010	50	1	01040 05 1				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,012	50	1	01060 10 0				
	<ul style="list-style-type: none"> Nickel-plated steel Cross key section 	75,0	6	0,018	25	1	00210 00 0			
		90,0	6	0,023	25	1	00211 00 0			
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	6	0,015	25	1	01210 00 2				


Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.

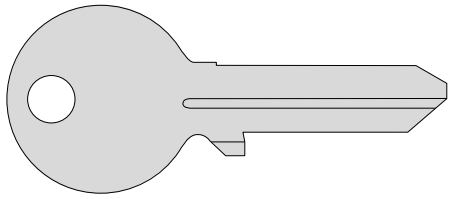

- Nickel-plated brass
- Paracentral keyway

5	0,014	25	1	01220	00	2
---	-------	----	---	-------	----	---


C2000

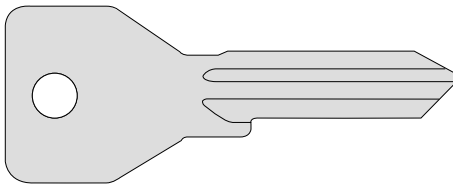

- Nickel-plated brass
- Paracentral keyway

5	0,012	50	1	01070	10	1
5	0,013	50	1	01070	10	2


C2000

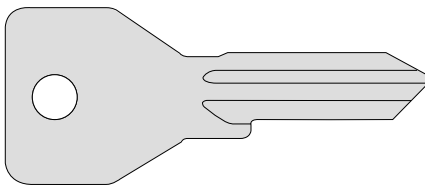

- Nickel-plated brass
- Paracentral keyway


4	0,012	50	1	01070	05	1
4	0,011	50	1	01070	05	2

C2000

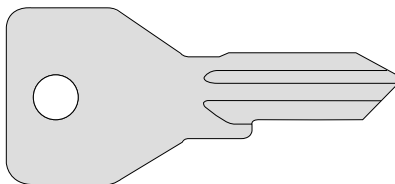


- Nickel-plated brass
- Paracentral keyway

3	0,011	50	1	01070	01	1
3	0,011	50	1	01070	01	2

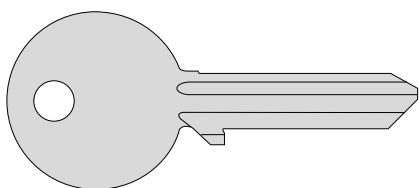



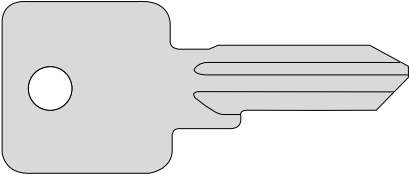

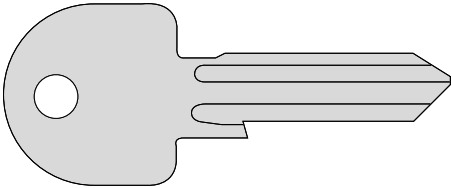

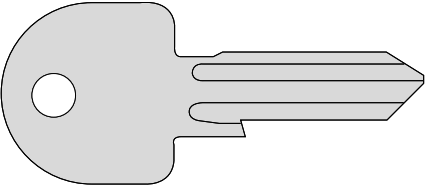

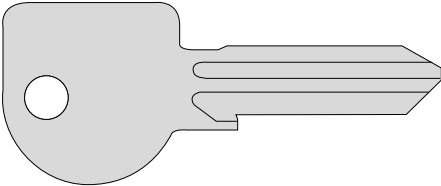

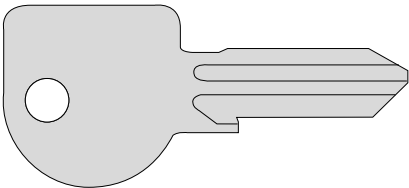

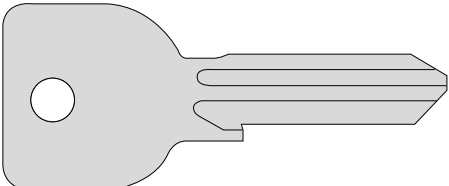

- Nickel-plated brass
- Paracentral keyway
















5	0,010	50	1	01310	00	1
5	0,010	50	1	01310	00	2

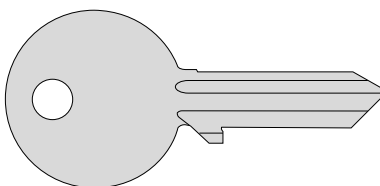


- Nickel-plated brass
- Paracentral keyway

4	0,010	50	1	01320	00	1
4	0,010	50	1	01320	00	2

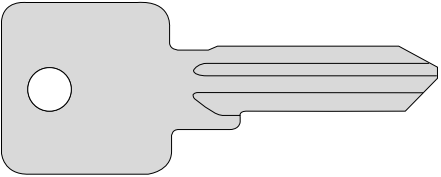Type	Description	L	Pins	Unit weight 	Pieces 	ITEM			
						Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway  	5	0,014	50	1	01310	10	1	
		5	0,015	50	1	01310	10	2	
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway  	4	0,014	50	1	01320	10	1	
		4	0,013	50	1	01320	10	2	
	<ul style="list-style-type: none"> Blank key for master key duplication (MK) Nickel-plated brass Paracentral keyway  	5	0,014	50	1	01310	20	1	
		5	0,010	50	1	01310	20	2	
	<ul style="list-style-type: none"> Blank key for master key duplication (MK) Nickel-plated brass Paracentral keyway  	4	0,011	50	1	01320	20	1	
	<ul style="list-style-type: none"> Blank key for grand master key duplication (GMK) Nickel-plated brass Paracentral keyway  	5	0,014	50	1	01310	30	1	
		5	0,010	50	1	01310	30	2	
	<ul style="list-style-type: none"> Blank key for grand master key duplication (GMK) Nickel-plated brass Paracentral keyway  	4	0,011	50	1	01320	30	1	
		4	0,010	50	1	01320	30	2	
	<ul style="list-style-type: none"> Blank key for great grand master key duplication (GGMK) Nickel-plated brass Paracentral keyway  	5	0,014	50	1	01310	40	1	

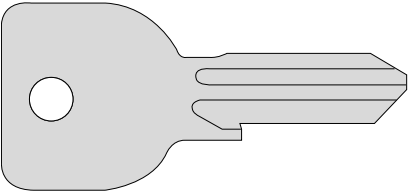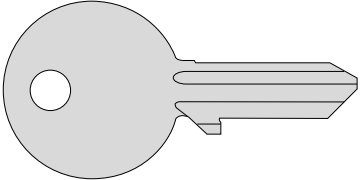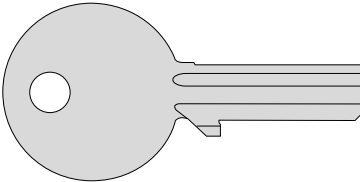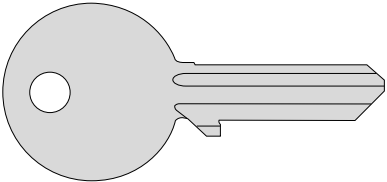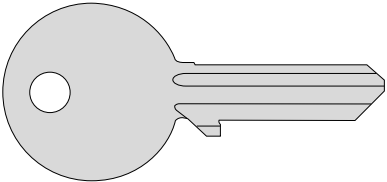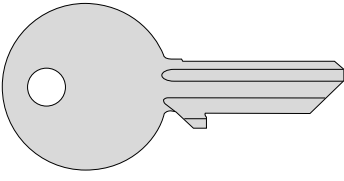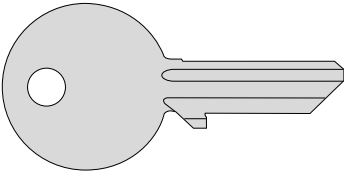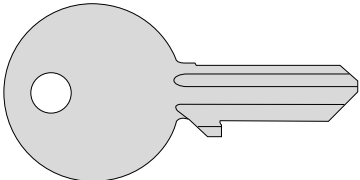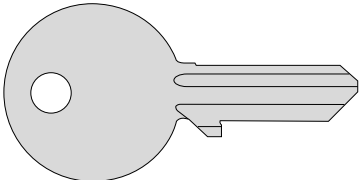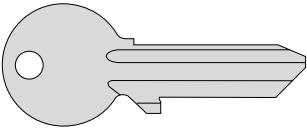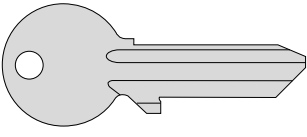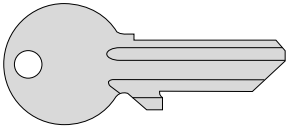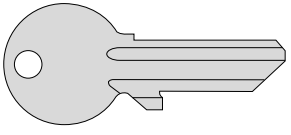
Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Blank key for great grand master key duplication (GGMK) Nickel-plated brass Paracentral keyway 	4	0,010	50	1	01320	40	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,011	50	1	01330	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,010	50	1	01330	00	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,007	50	1	01410	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,007	50	1	01410	00	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,008	50	1	01420	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,008	50	1	01420	00	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,007	50	1	01425	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,008	50	1	01425	00	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,005	50	1	01430	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,005	50	1	01430	00	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,005	50	1	01440	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,004	50	1	01440	00	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,003	50	1	01510	00	1		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,002	50	1	01510	00	2		

Type	Description	L	Pins	Unit weight	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

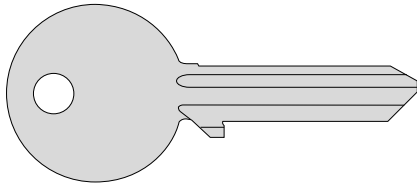


- Nickel-plated brass
- Multiprofile
- Paracentral keyway

5	0,010	50	1	01336 00 1
5	0,010	50	1	01336 00 2

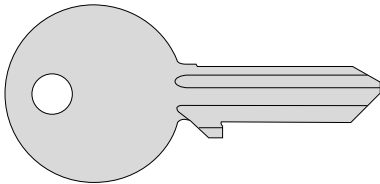


- Nickel-plated brass
- Multiprofile
- Paracentral keyway

4	0,009	50	1	01337 00 1
4	0,009	50	1	01337 00 2

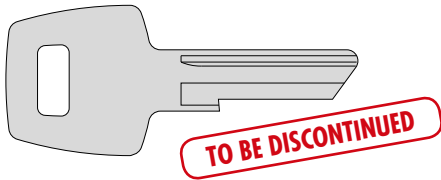

- Nickel-plated brass
- Wafer key


5	0,007	50	1	01710 00 1
5	0,006	50	1	01710 00 2

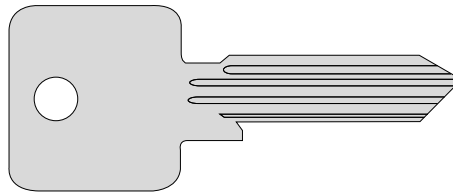

- Nickel-plated brass
- Paracentral keyway

5	0,015	50	1	00401 00 1
5	0,015	50	1	00401 00 2


SP

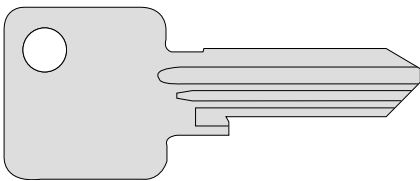

- Nickel silver
- Registered key
- To be ordered with Cisa 102 keyway only

6	0,020	50	1	00450 01 1
---	-------	----	---	------------

SP

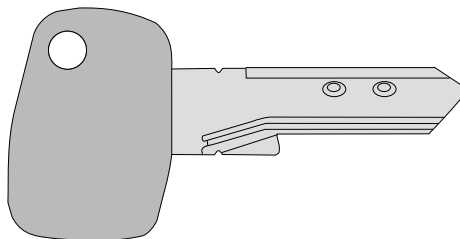


- Nickel silver
- Nylon bow
- Long key
- Registered key
- To be ordered with Cisa 102 keyway only

6	0,017	50	1	00450 90 1
---	-------	----	---	------------

Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.


Asix

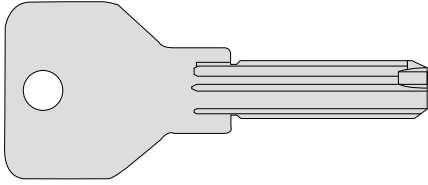

- Nickel-plated brass
- Thickness 2.9 mm.
- Flat profile

6 0,017 50 1 00670 01 0


Astral

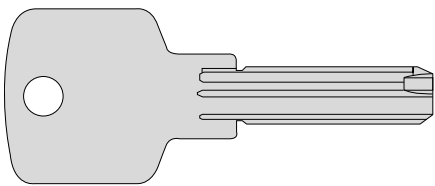

- Nickel-plated brass
- Thickness 2.2 mm.
- Flat profile

10 0,015 50 1 00600 01 0


Astral

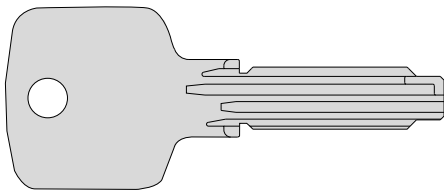

- Nickel-plated brass
- Thickness 2.9 mm.
- Flat profile

10 0,017 50 1 00620 01 0


Astral

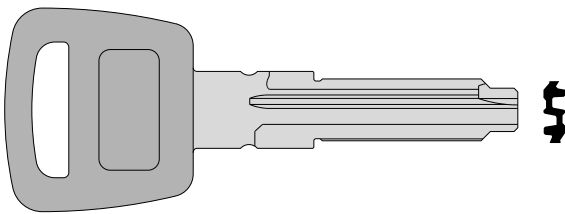

- Nickel-plated brass
- Nylon bow
- Long key
- Thickness 2.9 mm.
- Flat profile

10 0,015 20 1 00620 90 0

Astral Tekno

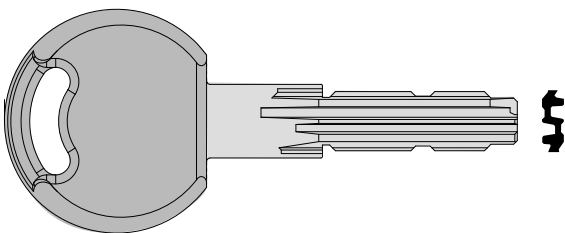


- Nickel-plated brass
- Nylon bow
- Long key 16 mm
- Flat profile, thickness 2.9 mm
- KEY BLANK DISTRIBUTION IS REGULATED BY CONTRACT

10 0,024 20 1 00690 00 0 00 CL


Type	Description	L	Pins	Unit weight 	Pieces 	ITEM			
						Type	Dim.	Hand	Fin.

AP3



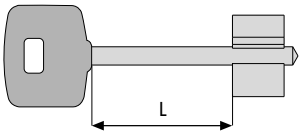

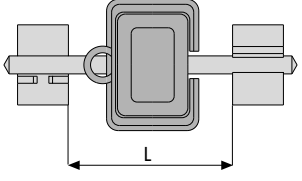

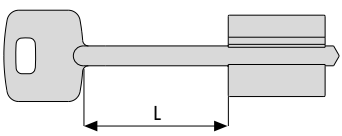

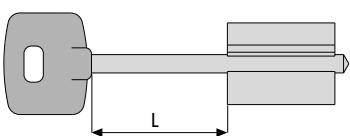

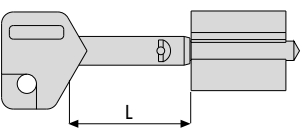

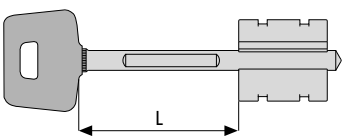

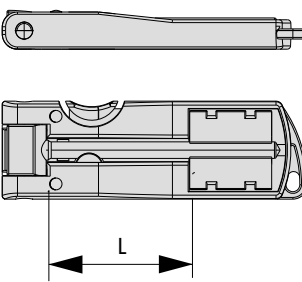

• SEE CISA SOLUTION PARTNER PROGRAM



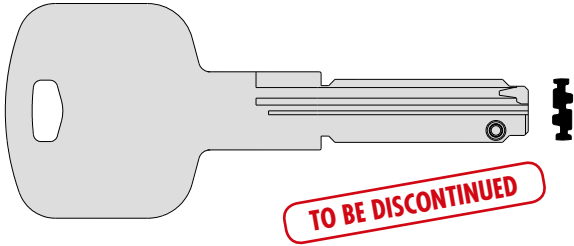


AP3

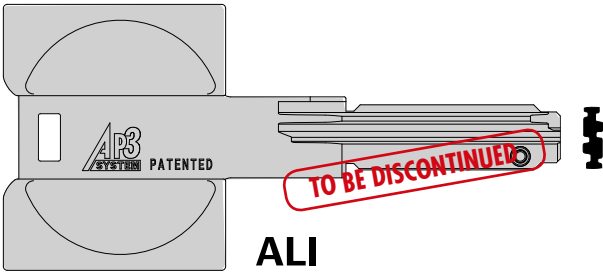

ALI

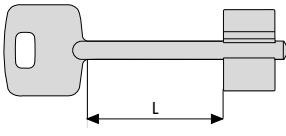Type	Description	For locks series	L	Levers	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
		<ul style="list-style-type: none"> Nickel-plated brass 	17300, 57000, 57200, 57300, 57400, 57800	35,5	6	0,018	25	1	00100	00	1
				60,0	6	0,022	25	1	00102	00	1
		<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	57000, 57200, 57800	35,5	6	0,020	25	1	00101	00	1
				35,5	6	0,020	25	1	00101	00	2
				46,0		0,022	25	1	00104	00	1
		<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	57050, 57055, 57060	42,0	6	0,028	10	1	00110	00	1
		<ul style="list-style-type: none"> Nickel-plated brass 	17500, 57100, 57500	62,0	6	0,029	25	1	00120	00	1
				62,0	6	0,029	25	1	00120	00	2
				37,0	6	0,025	25	1	00121	00	1
		<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	17500, 56700, 57500, 57700	37,0	6	0,029	10	1	00122	00	1
				58,0	6	0,033	25	1	00123	00	1
				47,0	6	0,030	10	1	00124	00	1
		<ul style="list-style-type: none"> Nickel-plated brass 	57100, 57500	60,0	6	0,040	10	1	00125	00	1
				60,0	6	0,040	10	1	00125	00	2
		<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	17600, 57600, 57900	44,0	6	0,032	10	1	00162	00	1
				64,0	6	0,036	10	1	00163	00	1
		<ul style="list-style-type: none"> Nickel-plated brass Nylon snap grip 	17600, 57600, 57900	44,0	6	0,042	10	1	00170	00	1
				64,0	6	0,042	10	1	00171	00	1



Oval shaped cylinders	51
C2000 european profile cylinders	52
C2000 rim cylinders	55
Hotel function cylinder	56
Standard european profile cylinders.....	57
Standard rim cylinders.....	58
Standard various cylinders	60
087 series european profile cylinders	62
087 series various cylinders.....	63
SP european profile cylinders.....	64
SP rim cylinders	66
SP various cylinders	67
ASIX european profile cylinders	68
ASIX rim cylinders	71
Snap resistant ASTRAL cylinders.....	73
ASTRAL european profile cylinders.....	75

ASTRAL rim cylinders.....	77
ASTRAL various cylinders.....	79
ASTRAL TEKNO european profile cylinders	80
ASTRAL TEKNO rim cylinders	83
ASTRAL TEKNO various cylinders.....	85
Snap resistant AP3 european profile cylinders	86
AP3 european profile cylinders	89
AP3 rim cylinders	90
AP3 various cylinders.....	92
AP3 S MODULO european profile cylinders.....	93
RS3 S european profile cylinders.....	96
RS3 S rim cylinders	98
RS3 S various cylinders	100
RS3 S MODULO european profile cylinders	101
Accessories for cylinders	104
Dimensional drawings	107



Technical features:

- brass body
- brass plugs
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- self-lubricating sintered steel cam
- KEY: nickel-plated brass


Supplied as standard:

- 3 keys
- Fixing screw

Finishes:


- STANDARD: sanded brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12)

Type	Description	Comm. dim.	L			Pins	Key item	Kg	Pieces	ITEM			
			A	B						Type	Dim.	Hand	Fin.




• Double cylinder

20 / 20	41,4	20,7	20,7	3	1	01425 00 1	0,120	12	1	08210 01 0				
28 / 28	55,4	27,7	27,7	5	1	01410 00 1	0,168	12	1	08210 02 0				
30 / 30	60,0	30,0	30,0	5	1	01410 00 1	0,180	12	1	08210 05 0				
28 / 35	62,7	27,7	35,0	5	1	01410 00 1	0,187	12	1	08210 06 0				
30 / 40	70,0	30,0	40,0	5	1	01410 00 1	0,204	12	1	08210 12 0				
35 / 35	70,0	35,0	35,0	5	1	01410 00 1	0,205	12	1	08210 13 0				
28 / 45	72,7	27,7	45,0	5	1	01410 00 1	0,210	6	1	08210 14 0				
28 / 53	80,7	27,7	53,0	5	1	01410 00 1	0,233	6	1	08210 16 0				
40 / 40	80,0	40,0	40,0	5	1	01410 00 1	0,231	6	1	08210 18 0				



• Single cylinder

28 / 10	38,0	27,7	10,3	5	1	01410 00 1	0,124	12	1	08220 02 0				
---------	------	------	------	---	---	------------	-------	----	---	------------	--	--	--	--



- Thumb turn double cylinder
- Black nylon knob

28 / 28	55,4	27,7	27,7	5	1	01410 00 1	0,183	6	1	08230 02 0				
35 / 28	62,7	35,0	27,7	5	1	01410 00 1	0,190	6	1	08230 06 0				



C2000

Technical features:

- brass body
- brass plugs
- self-lubricating sintered steel projecting cam, DIN-compatible
- pins:
 - in brass
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- KEY:
- nickel-plated brass
- long key for protective roses compatibility
- numerical coding on the head

Supplied as standard:

- 3 keys
- Fixing screw


Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (66)

Standards:

- Compliant with EN 1303:2005
- Attack Resistance: grade 0
- Key Related Security: grade 4
- Durability: grade 6

Type	Description	Comm. dim.	Key item				Kg	Pieces	ITEM			
			L	A	B	Pins			Type	Dim.	Hand	Fin.




• Double cylinder

22 / 22	43,4	21,7	21,7	3	1 01070 01 1	0,172	12	1	OG300	02 0
22 / 27	48,4	21,7	26,7	3	1 01070 01 1	0,192	12	1	OG300	03 0
25 / 25	49,8	24,9	24,9	4	1 01070 05 1	0,189	12	1	OG300	04 0
27 / 27	53,0	26,5	26,5	4	1 01070 05 1	0,200	12	1	OG300	05 0
27 / 33	59,0	26,5	32,5	4	1 01070 05 1	0,216	12	1	OG300	06 0
30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,216	12	1	OG300	07 0
30 / 33	62,0	29,5	32,5	5	1 01070 10 1	0,212	12	1	OG300	08 0
27 / 37	63,0	26,5	36,5	4	1 01070 05 1	0,237	12	1	OG300	09 0
30 / 35	64,0	29,5	34,5	5	1 01070 10 1	0,233	12	1	OG300	26 0
33 / 33	65,0	32,5	32,5	5	1 01070 10 1	0,233	12	1	OG300	10 0
27 / 43	69,0	26,5	42,5	4	1 01070 05 1	0,250	12	1	OG300	11 0
30 / 40	69,0	29,5	39,5	5	1 01070 10 1	0,250	12	1	OG300	12 0
35 / 35	69,0	34,5	34,5	5	1 01070 10 1	0,250	12	1	OG300	13 0
30 / 43	72,0	29,5	42,5	5	1 01070 10 1	0,258	6	1	OG300	14 0
37 / 37	73,0	36,5	36,5	5	1 01070 10 1	0,266	6	1	OG300	15 0
30 / 45	74,0	29,5	44,5	5	1 01070 10 1	0,266	6	1	OG300	27 0
35 / 40	74,0	34,5	39,5	5	1 01070 10 1	0,266	6	1	OG300	28 0
27 / 53	79,0	26,5	52,5	4	1 01070 05 1	0,283	6	1	OG300	16 0
30 / 50	79,0	29,5	49,5	5	1 01070 10 1	0,291	6	1	OG300	17 0
35 / 45	79,0	34,5	44,5	5	1 01070 10 1	0,283	6	1	OG300	19 0
40 / 40	79,0	39,5	39,5	5	1 01070 10 1	0,285	6	1	OG300	18 0
30 / 55	84,0	29,5	54,5	5	1 01070 10 1	0,300	6	1	OG300	33 0
35 / 50	84,0	34,5	49,5	5	1 01070 10 1	0,300	6	1	OG300	31 0
40 / 45	84,0	39,5	44,5	5	1 01070 10 1	0,300	6	1	OG300	30 0
43 / 43	85,0	42,5	42,5	5	1 01070 10 1	0,303	6	1	OG300	46 0
30 / 60	89,0	29,5	59,5	5	1 01070 10 1	0,316	6	1	OG300	20 0
35 / 55	89,0	34,5	54,5	5	1 01070 10 1	0,325	6	1	OG300	32 0
40 / 50	89,0	39,5	49,5	5	1 01070 10 1	0,316	6	1	OG300	21 0
45 / 45	89,0	44,5	44,5	5	1 01070 10 1	0,325	6	1	OG300	29 0
35 / 60	94,0	34,5	59,5	5	1 01070 10 1	0,312	6	1	OG300	38 0
45 / 50	94,0	44,5	49,5	5	1 01070 10 1	0,312	6	1	OG300	39 0
40 / 55	94,0	39,5	54,5	5	1 01070 10 1	0,330	6	1	OG300	42 0
30 / 65	94,0	29,5	64,5	5	1 01070 10 1	0,350	6	1	OG300	41 0
30 / 70	99,0	29,5	69,5	5	1 01070 10 1	0,350	6	1	OG300	24 0
35 / 65	99,0	34,5	64,5	5	1 01070 10 1	0,312	6	1	OG300	22 0
40 / 60	99,0	39,5	59,5	5	1 01070 10 1	0,350	6	1	OG300	25 0
45 / 55	99,0	44,5	54,5	5	1 01070 10 1	0,312	6	1	OG300	43 0
50 / 50	99,0	49,5	49,5	5	1 01070 10 1	0,350	6	1	OG300	23 0
45 / 60	104,0	44,5	59,5	5	1 01070 10 1	0,350	6	1	OG300	54 0
35 / 70	104,0	34,5	69,5	5	1 01070 10 1	0,350	6	1	OG300	49 0
30 / 80	109,0	29,5	79,5	5	1 01070 10 1	0,350	6	1	OG300	37 0
40 / 70	109,0	39,5	69,5	5	1 01070 10 1	0,360	6	1	OG300	35 0
50 / 60	109,0	49,5	59,5	5	1 01070 10 1	0,360	6	1	OG300	36 0
55 / 55	109,0	54,5	54,5	5	1 01070 10 1	0,360	6	1	OG300	70 0
60 / 60	119,0	59,5	59,5	5	1 01070 10 1	0,390	6	1	OG300	40 0
30 / 90	119,0	29,5	89,5	5	1 01070 10 1	0,390	6	1	OG300	52 0
40 / 80	119,0	39,5	79,5	5	1 01070 10 1	0,390	6	1	OG300	60 0
70 / 70	139,0	69,5	69,5	5	1 01070 10 1	0,440	6	1	OG300	50 0


Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Clutching system double cylinder 	27 / 27	53,0	26,5	26,5	4	1 01070 05 1	0,202	12	1	OG301	05	0
		27 / 33	59,0	26,5	32,5	4	1 01070 05 1	0,222	12	1	OG301	06	0
		30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,222	12	1	OG301	07	0
		27 / 37	63,0	26,5	36,5	4	1 01070 05 1	0,232	12	1	OG301	09	0
		30 / 35	64,0	29,5	34,5	5	1 01070 10 1	0,232	12	1	OG301	26	0
		27 / 43	69,0	26,5	42,5	4	1 01070 05 1	0,252	12	1	OG301	11	0
		35 / 35	69,0	34,5	34,5	5	1 01070 10 1	0,252	12	1	OG301	13	0
		30 / 40	69,0	29,5	39,5	5	1 01070 10 1	0,252	12	1	OG301	12	0
		35 / 40	74,0	34,5	39,5	5	1 01070 10 1	0,252	12	1	OG301	28	0
		40 / 45	84,0	39,5	44,5	5	1 01070 10 1	0,252	12	1	OG301	30	0
	<ul style="list-style-type: none"> • Single cylinder with adjustable cam in 8 position 	25 / 10	34,5	24,5	10,0	4	1 01070 05 1	0,146	12	1	OG304	18	0
		30 / 10	39,5	29,5	10,0	5	1 01070 10 1	0,155	12	1	OG304	02	0
		33 / 10	42,5	32,5	10,0	5	1 01070 10 1	0,165	12	1	OG304	09	0
		35 / 10	44,5	34,5	10,0	5	1 01070 10 1	0,170	12	1	OG304	07	0
		37 / 10	46,5	36,5	10,0	5	1 01070 10 1	0,175	12	1	OG304	10	0
		40 / 10	49,5	39,5	10,0	5	1 01070 10 1	0,191	12	1	OG304	03	0
		43 / 10	52,5	42,5	10,0	5	1 01070 10 1	0,195	12	1	OG304	11	0
		50 / 10	59,5	49,5	10,0	5	1 01070 10 1	0,215	12	1	OG304	04	0
		55 / 10	64,5	54,5	10,0	5	1 01070 10 1	0,245	12	1	OG304	35	0
		60 / 10	69,5	59,5	10,0	5	1 01070 10 1	0,245	12	1	OG304	05	0
		64 / 10	73,5	63,5	10,0	5	1 01070 10 1	0,255	12	1	OG304	21	0
		70 / 10	79,5	69,5	10,0	5	1 01070 10 1	0,275	12	1	OG304	06	0
		80 / 10	89,5	79,5	10,0	5	1 01070 10 1	0,305	12	1	OG304	20	0
94 / 10	103,5	93,5	10,0	5	1 01070 10 1	0,355	12	1	OG304	13	0		
	<ul style="list-style-type: none"> • Double cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 	30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,237	6	1	OG302	07	0
		30 / 35	64,0	29,5	34,5	5	1 01070 10 1	0,250	6	1	OG302	26	0
		35 / 30	64,0	34,5	29,5	5	1 01070 10 1	0,250	6	1	OG302	81	0
		33 / 33	65,0	32,5	32,5	5	1 01070 10 1	0,255	6	1	OG302	10	0
		30 / 40	69,0	29,5	39,5	5	1 01070 10 1	0,270	6	1	OG302	82	0
		35 / 35	69,0	34,5	34,5	5	1 01070 10 1	0,270	6	1	OG302	13	0
		40 / 30	69,0	39,5	29,5	5	1 01070 10 1	0,270	6	1	OG302	12	0
		35 / 40	74,0	34,5	39,5	5	1 01070 10 1	0,285	6	1	OG302	28	0
		40 / 35	74,0	39,5	34,5	5	1 01070 10 1	0,285	6	1	OG302	83	0
		30 / 50	79,0	29,5	49,5	5	1 01070 10 1	0,300	6	1	OG302	17	0
		35 / 45	79,0	34,5	44,5	5	1 01070 10 1	0,300	6	1	OG302	19	0
		40 / 40	79,0	39,5	39,5	5	1 01070 10 1	0,300	6	1	OG302	18	0
		45 / 35	79,0	44,5	34,5	5	1 01070 10 1	0,300	6	1	OG302	85	0
		40 / 45	84,0	39,5	44,5	5	1 01070 10 1	0,315	6	1	OG302	30	0
		45 / 40	84,0	44,5	39,5	5	1 01070 10 1	0,315	6	1	OG302	84	0
		43 / 43	85,0	42,5	42,5	5	1 01070 10 1	0,318	6	1	OG302	46	0
		30 / 60	89,0	29,5	59,5	5	1 01070 10 1	0,330	6	1	OG302	20	0
		40 / 50	89,0	39,5	49,5	5	1 01070 10 1	0,330	6	1	OG302	21	0
		45 / 45	89,0	44,5	44,5	5	1 01070 10 1	0,330	6	1	OG302	29	0
		40 / 55	94,0	39,5	54,5	5	1 01070 10 1	0,350	6	1	OG302	42	0
		45 / 50	94,0	44,5	49,5	5	1 01070 10 1	0,350	6	1	OG302	39	0
		45 / 55	99,0	44,5	54,5	5	1 01070 10 1	0,360	6	1	OG302	43	0
		50 / 50	99,0	49,5	49,5	5	1 01070 10 1	0,360	6	1	OG302	23	0
		45 / 60	104,0	44,5	59,5	5	1 01070 10 1	0,375	6	1	OG302	54	0
		55 / 50	104,0	54,5	49,5	5	1 01070 10 1	0,375	6	1	OG302	64	0
		30 / 80	109,0	29,5	79,5	5	1 01070 10 1	0,390	6	1	OG302	37	0
		40 / 70	109,0	39,5	69,5	5	1 01070 10 1	0,390	6	1	OG302	35	0
50 / 60	109,0	49,5	59,5	5	1 01070 10 1	0,390	6	1	OG302	36	0		
60 / 50	109,0	59,5	49,5	5	1 01070 10 1	0,390	6	1	OG302	89	0		
55 / 60	114,0	54,5	59,5	5	1 01070 10 1	0,400	6	1	OG302	71	0		
55 / 65	119,0	54,5	64,5	5	1 01070 10 1	0,420	6	1	OG302	72	0		
60 / 60	119,0	59,5	59,5	5	1 01070 10 1	0,420	6	1	OG302	40	0		
65 / 55	119,0	64,5	54,5	5	1 01070 10 1	0,420	6	1	OG302	86	0		

Type	Description	Comm. dim.					Key item	Unit weight Kg	Pieces	ITEM				
		L	A	B	Plns	Type				Dim.	Hand	Fin.	Pers.	Spec.




- Double cylinder with adjustable thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,260	6	1	0G307 07 0				
35 / 30	64,0	34,5	29,5	5	1 01070 10 1	0,270	6	1	0G307 81 0				
40 / 30	69,0	39,5	29,5	5	1 01070 10 1	0,272	6	1	0G307 12 0				
45 / 30	74,0	44,5	29,5	5	1 01070 10 1	0,287	6	1	0G307 91 0				
50 / 30	79,0	49,5	29,5	5	1 01070 10 1	0,300	6	1	0G307 90 0				
60 / 30	89,0	59,5	29,5	5	1 01070 10 1	0,320	6	1	0G307 87 0				
70 / 30	99,0	69,5	29,5	5	1 01070 10 1	0,340	6	1	0G307 88 0				




- Nickel-plated double cylinder C2000 series with special cam 90° for series 46305 locks
- 3 keys
- Fixing screws

30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,216	12	1	0G303 07 0 12				
----------------	------	------	------	---	--------------	-------	----	---	----------------------	--	--	--	--



- Nickel-plated single cylinder C2000 series with special cam 90° for series 46305 locks
- 3 keys
- Fixing screws

30 / 10	39,5	29,5	10,0	5		0,155	12	1	0G305 02 0 12				
----------------	------	------	------	---	--	-------	----	---	----------------------	--	--	--	--



Technical features:

- brass body
- brass plugs
- pins:
 - in brass
- drivers:
 - in brass, mushroom-type anti-picking and cylindrical
- phosphor bronze springs
- KEY
 - nickel-plated brass
 - long key for protective roses compatibility
- Numerical coding on the head.





Supplied as standard:

- 3 keys
- Fixing screw

Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)

C2000

Type	Description	For locks series	Key item		Unit weight Kg	Pieces	ITEM						
			L	Pins			Type	Dim.	Hand	Fin.	Pers.	Spec.	
	• Rim cylinder	1A610	5	1 01070 101	0,182	6	1	OG500	00	0			
	• Round cylinder	1A611	105,0	5	1 01070 101	0,193	6	1	OG200	05	0		
			55,0	5	1 01070 101	0,168	6	1	OG200	55	0		
			65,0	5	1 01070 101	0,165	6	1	OG200	65	0		
			75,0	5	1 01070 101	0,174	6	1	OG200	75	0		
			85,0	5	1 01070 101	0,185	6	1	OG200	85	0		
95,0	5	1 01070 101	0,182	6	1	OG200	95	0					
	• Cylinder set	1A630	5	1 01070 101	0,250	6	1	OG115	00	0			
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	5	1 01070 101	0,255	6	1	OG150	00	0		



Technical features:

- Casing, keys and main elements made from brass
- Emergency key for hotel function
- Keyed Alike or master key system (to be defined) (see the On Request optional section)

Supplied as standard:

- 3 customer type keys
- Fixing screw
- Inside thumb turn


Finishes:

- STANDARD: painted polished brass (fin. 66)
- ON REQUEST: polished chrome (fin. 21)

Standards:

- Compliant with standard EN 1303: 2005
- Key Related Security: class 2
- Attack Resistance: class 0
- Durability: class 6

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim	Hand	Fin.



- Double cylinder with installed thumb turn

31 / 23	54,0	30,8	23,2	5	1 01310 00 1	0,300	6	1	08453	03	0	66
33 / 27	59,5	32,5	27,0	5	1 01310 00 1	0,300	6	1	08453	05	0	66
31 / 31	61,6	30,8	30,8	5	1 01310 00 1	0,300	6	1	08453	04	0	66
33 / 31	63,3	32,5	30,8	5	1 01310 00 1	0,300	6	1	08453	06	0	66
31 / 33	63,3	30,8	32,5	5	1 01310 00 1	0,350	6	1	08453	07	0	66
33 / 33	65,0	32,5	32,5	5	1 01310 00 1	0,263	6	1	08453	34	0	66
43 / 23	65,7	42,5	23,2	5	1 01310 00 1	0,540	6	1	08453	41	0	66
31 / 36	67,1	30,8	36,3	5	1 01310 00 1	0,350	6	1	08453	09	0	66
36 / 31	67,1	36,3	30,8	5	1 01310 00 1	0,350	6	1	08453	10	0	66
35 / 35	69,0	34,5	34,5	5	1 01310 00 1	0,338	6	1	08453	14	0	66
36 / 36	72,0	36,3	36,3	5	1 01310 00 1	0,485	6	1	08453	18	0	66
37 / 43	73,3	30,8	42,5	5	1 01310 00 1	0,350	6	1	08453	11	0	66
43 / 33	73,3	42,5	30,8	5	1 01310 00 1	0,402	6	1	08453	12	0	66
43 / 36	78,5	42,5	36,3	5	1 01310 00 1	0,300	6	1	08453	17	0	66
31 / 50	80,8	30,8	50,0	5	1 01310 00 1	0,418	6	1	08453	26	0	66
36 / 46	82,1	36,3	45,8	5	1 01310 00 1	0,427	6	1	08453	19	0	66
46 / 36	82,1	45,8	36,3	5	1 01310 00 1	0,430	6	1	08453	33	0	66
33 / 50	82,5	32,5	50,0	5	1 01310 00 1	0,427	6	1	08453	29	0	66
43 / 43	85,0	42,5	42,5	5	1 01310 00 1	0,435	6	1	08453	25	0	66
36 / 51	87,0	36,0	51,0	5	1 01310 00 1	0,443	6	1	08453	20	0	66
43 / 46	88,3	42,5	45,8	5	1 01310 00 1	0,443	6	1	08453	21	0	66
46 / 43	88,3	45,8	42,5	5	1 01310 00 1	0,443	6	1	08453	22	0	66
55 / 35	89,0	54,5	34,5	5	1 01310 00 1	0,361	6	1	08453	50	0	66
43 / 47	89,5	42,5	47,0	5	1 01310 00 1	0,452	6	1	08453	44	0	66
40 / 50	90,0	40,0	50,0	5	1 01310 00 1	0,470	6	1	08453	43	0	66
31 / 60	90,8	30,8	60,0	5	1 01310 00 1	0,452	6	1	08453	27	0	66
68 / 23	91,2	68,0	23,2	5	1 01310 00 1	0,452	6	1	08453	42	0	66
46 / 46	91,6	45,8	45,8	5	1 01310 00 1	0,390	6	1	08453	38	0	66
60 / 36	96,3	60,0	36,3	5	1 01310 00 1	0,431	6	1	08453	37	0	66
36 / 60	96,3	36,3	60,0	5	1 01310 00 1	0,431	6	1	08453	67	0	66
45 / 55	99,0	44,5	54,5	5	1 01310 00 1	0,330	6	1	08453	31	0	66
55 / 45	99,0	54,5	44,5	5	1 01310 00 1	0,410	6	1	08453	35	0	66
60 / 46	105,8	60,0	45,8	5	1 01310 00 1	0,540	6	1	08453	40	0	66
43 / 65	107,0	42,5	64,5	5	1 01310 00 1	0,300	6	1	08453	49	0	66
60 / 50	110,0	60,0	50,0	5	1 01310 00 1	0,300	6	1	08453	39	0	66
31 / 80	110,8	30,8	80,0	5	1 01310 00 1	0,485	6	1	08453	13	0	66
55 / 65	119,0	54,5	64,5	5	1 01310 00 1	0,500	6	1	08453	32	0	66
65 / 55	119,0	64,5	54,5	5	1 01310 00 1	0,500	6	1	08453	36	0	66

TO BE DISCONTINUED



Technical features:

- brass body
- brass plugs
- self-lubricating sintered steel projecting DIN cam

Finishes:

- **STANDARD:**
sanded brass (fin. 00)
- **ON REQUEST:**
nickel-plated brass (fin. 12)

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM					
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Double cylinder for bathroom doors with thumb turn shaft • No keys • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 	27 / 27	54,0	27,0	27,0		0,180	6	1	08325	02	0		
		27 / 33	59,5	27,0	32,5		0,200	6	1	08325	24	0		
		31 / 31	61,6	30,8	30,8		0,204	6	1	08325	04	0		
		35 / 35	69,0	34,5	34,5		0,226	6	1	08325	14	0		
	<ul style="list-style-type: none"> • Single cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 	33 / 40	47,5	32,5	10,0		0,138	6	1	08359	09	0		
		37 / 40	46,5	36,5	10,0		0,151	6	1	08359	10	0		
		43 / 40	58,5	48,5	10,0		0,130	6	1	08359	11	0		

TO BE DISCONTINUED



Technical features:







- brass body
- brass plug
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY: nickel-plated brass




Supplied as standard:

- 3 keys
- Fixing screws
- Fixing plates

Finishes:

- STANDARD: satin brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12) polished brass (fin. 66)

Type	Description	For locks series	L	Pins	Key item	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Spec.
	• Cylinder WHILE STOCK LASTS Replaced by 10G500 00 0	1A610, 11610, 50110, 50130, 50180, 50330, 54315, 54340, 54570	5	1	101310 00 1	0,182	6	1	02500	00 0	
	• Rim cylinder with nickel-plated tear and drill resistant rose TO BE DISCONTINUED		5	1	101310 00 1	0,205	6	1	02500	11 0	
	• Rim cylinder	13010	6	1	101210 00 2	0,238	6	1	02520	00 0	
	• Rim cylinder	11610, 50110, 50130, 50180, 54570	5	1	101070 10 1	0,180	6	1	02550	25 0	
	• Round cylinder WHILE STOCK LASTS Replaced by 10G200 XX 0	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	100,0	5	101310 00 1	0,193	6	1	02552	10 0	
			50,0	5	101310 00 1	0,168	6	1	02552	50 0	
			60,0	5	101310 00 1	0,165	6	1	02552	60 0	
			70,0	5	101310 00 1	0,174	6	1	02552	70 0	
			80,0	5	101310 00 1	0,185	6	1	02552	80 0	
			90,0	5	101310 00 1	0,182	6	1	02552	90 0	
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220	5	1	101070 10 1	0,250	6	1	02102	00 0	
		11630	5	1	101070 10 1	0,255	6	1	02104	00 0	
		11670	5	1	101070 10 1	0,262	6	1	02146	00 0	

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM						
			L	Plns			kg	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • Cylinder set, with round external cylinder 	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571	50,0	5	1 01070 10 1	0,256	6	1	02106	00	0		
		11631, 11731, 11931	50,0	5	1 01070 10 1	0,256	6	1	02110	00	0		
		11721, 11921	50,0	5	1 01070 10 1	0,269	6	1	02139	00	0		
		11823	70,0	5	1 01070 10 1	0,252	6	1	02142	00	0		
		11671, 11761, 11771	50,0	5	1 01070 10 1	0,267	6	1	02145	00	0		
	<ul style="list-style-type: none"> • Cylinder for roll-up shutter locks • Finish: polished brass only (fin. 66) 	41410, 41420, 41421	10,0	3	1 01320 00 2	0,089	6	1	02544	10	0		
		41010, 41110, 41111	14,0	3	1 01310 00 2	0,104	6	1	02544	14	0		
		41210, 41220, 41221, 41230, 41231, 41310, 41311, 41320	15,0	4	1 01310 00 2	0,120	6	1	02544	15	0		
	<ul style="list-style-type: none"> • Cylinder for gate locks • Finish: polished brass only (fin. 66) 	42010, 42020, 42030, 42110, 42120, 42210, 42310, 42410, 42420, 42510		4	1 01330 00 1	0,180	6	1	02156	00	0		



Technical features:







- brass body
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY: nickel-plated brass















Supplied as standard:

- 2 or 3 keys
- Fixing screws
- Fixing plates

Finishes:

- Various finishes according to the cylinder type

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Cross-key cylinder complete with 19 mm adaptor • For locks series 16000, 46000 • Short key version 	6	1	1 00210 00 0	0,119	12	1	02400	10	0	
	<ul style="list-style-type: none"> • Cross-key cylinder complete with 19 mm adaptor • For locks series 16000, 46000 • Long key version 	6	1	1 00211 00 0	0,132	12	1	02400	11	0	
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.28.0 • Sanded brass 	5	1	1 01310 00 1	0,120	6	1	02649	10	0	
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 • Sanded brass 	5	1	1 01310 00 1	0,118	6	1	02649	11	0	
	<ul style="list-style-type: none"> • 3 keys • Belt sanded brass <p>TO BE DISCONTINUED</p>	4	1	1 01320 00 1	0,280	6	1	44010	02	0	
	<ul style="list-style-type: none"> • 3 keys • Belt sanded brass <p>TO BE DISCONTINUED</p>	4	1	1 01320 00 1	0,280	6	1	44011	02	0	
	<ul style="list-style-type: none"> • 2 keys • polished brass <p>TO BE DISCONTINUED</p>	4	1	1 01420 00 1	0,110	6	1	72010	00	0	

Type	Description	Door thickness Pins	Key item	Kg Unit weight	Pcs Pieces	ITEM				
						Type	Dim.	Hand	Fin. Pers. Spec.	
 	<ul style="list-style-type: none"> • 2 keys • Belt sanded brass • Key removed in vertical position • Cam item 06411 or 06412, to be ordered separately 	11	3	1 01420 00 1	0,078	12	1	72210	16	0
		15	4	1 01420 00 1	0,087	12	1	72210	20	0
		20	4	1 01420 00 1	0,097	12	1	72210	25	0
		25	4	1 01420 00 1	0,108	12	1	72210	30	0
 	<ul style="list-style-type: none"> • MARINE TYPE • 2 keys • Chrome -plated brass • Key removed in vertical position • Cam item 1.06412.51.0, specify with order 	11	3	1 01420 00 1	0,077	12	1	72215	16	0
		15	4	1 01420 00 1	0,085	12	1	72215	20	0
		20	4	1 01420 00 1	0,094	12	1	72215	25	0
		25	4	1 01420 00 1	0,105	12	1	72215	30	0
 	<ul style="list-style-type: none"> • 3 keys • Nickel-plated brass • Vertical key extraction • Deadbolt to choose from items 1.06414.20.0 and 1.06414.30.0 (specify in order) 	17	5	1 01310 00 1	0,135	6	1	72250	26	0
  	<ul style="list-style-type: none"> • 3 keys • Nickel-plated brass • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	5	1 01310 00 1	0,145	6	1	72251	01	0
  	<ul style="list-style-type: none"> • 3 keys • Nickel-plated brass • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	5	1 01310 00 1	0,144	6	1	72251	03	0
 	<ul style="list-style-type: none"> • 2 keys • ZAL alloy, s. steel faceplate • Double extraction • Deadbolt item 06413 or 06414 to be ordered separately 	8	5	1 01710 00 1	0,055	6	1	72350	17	0
		16	5	1 01710 00 1	0,070	6	1	72350	25	0

TO BE DISCONTINUED



Technical features:

- brass body
- brass plugs
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass, cylindrical and mushroom-like for an antipicking function
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting DIN cam
- KEY: nickel-plated brass

Supplied as standard:

- 3 keys
- Fixing screw


Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12),
 - polished brass (fin. 66)

Standards:


- Compliant with EN 1303:2005
- Attack Resistance: grade 0
- Key Related Security: grade 2
- Durability: grade 6

Type	Description	Comm. dim.	Key item				Kg	Pieces	ITEM			
			L	A	B	Pins			Type	Dim.	Hand	Fin.



• Double cylinder

25 / 25	49,8	24,9	24,9	4	1 01320 10 1	0,192	12	1	08710 04 0
27 / 27	53,0	26,5	26,5	4	1 01320 10 1	0,202	12	1	08710 05 0
27 / 33	59,0	26,5	32,5	4	1 01320 10 1	0,220	12	1	08710 06 0
30 / 30	59,0	29,5	29,5	5	1 01310 10 1	0,220	12	1	08710 07 0
30 / 33	62,0	29,5	32,5	5	1 01310 10 1	0,227	12	1	08710 08 0
27 / 37	63,0	26,5	36,5	4	1 01320 10 1	0,234	12	1	08710 09 0
30 / 35	64,0	29,5	34,5	5	1 01310 10 1	0,238	12	1	08710 26 0
33 / 33	65,0	32,5	32,5	5	1 01310 10 1	0,237	12	1	08710 10 0
27 / 43	69,0	26,5	42,5	4	1 01320 10 1	0,247	12	1	08710 11 0
30 / 40	69,0	29,5	39,5	5	1 01310 10 1	0,249	12	1	08710 12 0
35 / 35	69,0	34,5	34,5	5	1 01310 10 1	0,250	12	1	08710 13 0
30 / 43	72,0	29,5	42,5	5	1 01310 10 1	0,260	6	1	08710 14 0
37 / 37	73,0	36,5	36,5	5	1 01310 10 1	0,264	6	1	08710 15 0
30 / 45	74,0	29,5	44,5	5	1 01310 10 1	0,275	6	1	08710 27 0
35 / 40	74,0	34,5	39,5	5	1 01310 10 1	0,275	6	1	08710 28 0
27 / 53	79,0	26,5	52,5	4	1 01320 10 1	0,281	6	1	08710 16 0
30 / 50	79,0	29,5	49,5	5	1 01310 10 1	0,290	6	1	08710 17 0
35 / 45	79,0	34,5	44,5	5	1 01310 10 1	0,290	6	1	08710 19 0
40 / 40	79,0	39,5	39,5	5	1 01310 10 1	0,290	6	1	08710 18 0
30 / 60	89,0	29,5	59,5	5	1 01310 10 1	0,316	6	1	08710 20 0
40 / 50	89,0	39,5	49,5	5	1 01310 10 1	0,317	6	1	08710 21 0
45 / 45	89,0	44,5	44,5	5	1 01310 10 1	0,317	6	1	08710 29 0
30 / 70	99,0	29,5	69,5	5	1 01310 10 1	0,345	6	1	08710 24 0
35 / 65	99,0	34,5	64,5	5	1 01310 10 1	0,345	6	1	08710 22 0
40 / 60	99,0	39,5	59,5	5	1 01310 10 1	0,345	6	1	08710 25 0
50 / 50	99,0	49,5	49,5	5	1 01310 10 1	0,345	6	1	08710 23 0
30 / 80	109,0	29,5	79,5	5	1 01310 10 1	0,375	6	1	08710 37 0
50 / 60	109,0	49,5	59,5	5	1 01310 10 1	0,375	6	1	08710 36 0



• Single cylinder with adjustable cam in 8 position

30 / 10	39,5	29,5	10,0	5	1 01310 10 1	0,184	12	1	08730 02 0
35 / 10	44,5	34,5	10,0	5	1 01310 10 1	0,175	12	1	08730 07 0
40 / 10	49,5	39,5	10,0	5	1 01310 10 1	0,191	12	1	08730 03 0
43 / 10	52,5	42,5	10,0	5	1 01310 10 1	0,200	12	1	08730 11 0
50 / 10	59,5	49,5	10,0	5	1 01310 10 1	0,220	12	1	08730 04 0




Technical features:

- Brass body
- Brass plug
- Pins:
 - in wear resistant bronze
 - in hardened steel in first position
- Drivers:
 - in brass, cylindrical and mushroom-like for an antipicking function
 - in hardened steel in first position
- Phosphor bronze springs
- KEY: Nickel-plated brass

Supplied as standard:

- 2 keys

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM			
							Type	Dim.	Hand	Fin.



- Small cylinder for padlocks:
series 28050 - 28350 - 28550
- 2 keys
- Pickled brass body
- Complete with plate

5	1	01310	10	1	0,095	6	1	02649	01	0
5	1	00401	00	1	0,096	6	1	02650	01	0



SP

Technical features:

- BKP (Bumping resistant) patented system
- Registered key.
- brass body
- brass plugs
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- side stainless steel balls
- drivers:
 - in brass, cylindrical and mushroom-like for an antipicking function
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting DIN cam
- KEYS:
 - in nickel silver alloy
 - numbered on key bow

Supplied as standard:

- Fixing screw
 - 3 keys
 - Code Card
- Finishes:**
- STANDARD: nickel-plated brass (fin. 12)


Standards:

- Compliant with EN 1303 :2005
- Attack Resistance: grade 0
- Key Related Security: grade 6
- Durability: grade 6

Patents:

- Key is protected by a Shape trademark BO2004C000170


Type	Description	Comm. dim.				Key item	Kg		ITEM		
		L	A	B	Pins		Unit weight	Pieces	Type	Dim	Hand



• Double cylinder

28 / 28	55,4	27,7	27,7	5	1 00450 01 1	0,244	1	1	08815 05 0 12
30 / 30	59,0	29,5	29,5	6	1 00450 01 1	0,254	1	1	08815 07 0 12
28 / 34	61,2	27,7	33,5	5	1 00450 01 1	0,264	1	1	08815 06 0 12
30 / 33	62,0	29,5	32,5	6	1 00450 01 1	0,270	1	1	08815 08 0 12
28 / 36	63,2	27,7	35,5	5	1 00450 01 1	0,270	1	1	08815 09 0 12
30 / 35	64,0	29,5	34,5	6	1 00450 01 1	0,269	1	1	08815 26 0 12
33 / 33	65,0	32,5	32,5	6	1 00450 01 1	0,270	1	1	08815 10 0 12
30 / 40	69,0	29,5	29,5	6	1 00450 01 1	0,284	1	1	08815 12 0 12
35 / 35	69,0	34,5	34,5	6	1 00450 01 1	0,284	1	1	08815 13 0 12
28 / 42	69,2	27,7	41,5	5	1 00450 01 1	0,288	1	1	08815 11 0 12
30 / 43	72,0	29,5	42,5	6	1 00450 01 1	0,293	1	1	08815 14 0 12
35 / 37	73,0	36,5	36,5	6	1 00450 01 1	0,296	1	1	08815 15 0 12
30 / 44	74,0	29,5	44,5	6	1 00450 01 1	0,297	1	1	08815 27 0 12
35 / 40	74,0	34,5	39,5	6	1 00450 01 1	0,303	1	1	08815 28 0 12
30 / 50	79,0	29,5	49,5	6	1 00450 01 1	0,315	1	1	08815 17 0 12
35 / 47	79,0	34,5	44,5	6	1 00450 01 1	0,314	1	1	08815 19 0 12
40 / 40	79,0	39,5	39,5	6	1 00450 01 1	0,314	1	1	08815 18 0 12
28 / 54	81,2	27,7	53,5	5	1 00450 01 1	0,324	1	1	08815 16 0 12
40 / 45	84,0	39,5	44,5	6	1 00450 01 1	0,330	1	1	08815 30 0 12
30 / 60	89,0	29,5	59,5	6	1 00450 01 1	0,344	1	1	08815 20 0 12
40 / 50	89,0	39,5	49,5	6	1 00450 01 1	0,344	1	1	08815 21 0 12
45 / 45	89,0	44,5	44,5	6	1 00450 01 1	0,343	1	1	08815 29 0 12
35 / 55	89,0	34,5	54,5	6	1 00450 01 1	0,344	1	1	08815 32 0 12
30 / 70	99,0	29,5	69,5	6	1 00450 01 1	0,376	1	1	08815 24 0 12
35 / 65	99,0	34,5	64,5	6	1 00450 01 1	0,377	1	1	08815 22 0 12
40 / 60	99,0	39,5	59,5	6	1 00450 01 1	0,377	1	1	08815 25 0 12
30 / 80	109,0	29,5	79,5	6	1 00450 01 1	0,405	1	1	08815 37 0 12
40 / 70	109,0	39,5	69,5	6	1 00450 01 1	0,409	1	1	08815 35 0 12
50 / 60	109,0	49,5	59,5	6	1 00450 01 1	0,406	1	1	08815 36 0 12


TO BE DISCONTINUED



• Single cylinder with adjustable cam in 8 position


30 / 10	39,5	29,5	10,0	6	1 00450 01 1	0,205	1	1	08835 02 0 12
33 / 10	42,5	32,5	10,0	6	1 00450 01 1	0,179	1	1	08835 09 0 12
35 / 10	44,5	34,5	10,0	6	1 00450 01 1	0,185	1	1	08835 07 0 12
40 / 10	49,5	39,5	10,0	6	1 00450 01 1	0,201	1	1	08835 03 0 12
50 / 10	59,5	49,5	10,0	6	1 00450 01 1	0,230	1	1	08835 04 0 12

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.



- Double cylinder with thumb turn shaft
- ON REQUEST:
Knobs series 06353, 06354, 06355, 06356, 06357

31 / 23	54,0	30,8	23,2	6	1	00450 01 1	0,240	1	1	08857 03 0 12
33 / 27	59,5	32,5	27,0	6	1	00450 01 1	0,240	1	1	08857 05 0 12
31 / 31	61,6	30,8	30,8	6	1	00450 01 1	0,240	1	1	08857 04 0 12
31 / 33	63,3	30,8	32,5	6	1	00450 01 1	0,260	1	1	08857 07 0 12
43 / 23	65,7	42,5	23,2	6	1	00450 01 1	0,250	1	1	08857 41 0 12
36 / 31	67,1	36,3	30,8	6	1	00450 01 1	0,270	1	1	08857 10 0 12
36 / 36	72,6	36,3	36,3	6	1	00450 01 1	0,290	1	1	08857 18 0 12
31 / 43	73,3	30,8	42,5	6	1	00450 01 1	0,300	1	1	08857 11 0 12
43 / 31	73,3	42,5	30,8	6	1	00450 01 1	0,300	1	1	08857 72 0 12
46 / 31	76,6	45,8	30,8	6	1	00450 01 1	0,260	1	1	08857 60 0 12
40 / 36	75,8	39,5	36,3	6	1	00450 01 1	0,260	1	1	08857 75 0 12
40 / 40	79,0	39,5	39,5	6	1	00450 01 1	0,260	1	1	08857 76 0 12
43 / 36	78,8	42,5	36,3	6	1	00450 01 1	0,310	1	1	08857 17 0 12
33 / 50	82,5	32,5	50,0	6	1	00450 01 1	0,320	1	1	08857 29 0 12
43 / 43	85,0	42,5	42,5	6	1	00450 01 1	0,330	1	1	08857 25 0 12
55 / 31	85,3	54,5	30,8	6	1	00450 01 1	0,260	1	1	08857 61 0 12
40 / 46	85,3	39,5	45,8	6	1	00450 01 1	0,260	1	1	08857 77 0 12
50 / 36	85,8	49,5	36,3	6	1	00450 01 1	0,260	1	1	08857 78 0 12
31 / 60	90,8	30,8	60,0	6	1	00450 01 1	0,340	1	1	08857 27 0 12
46 / 46	91,6	45,8	45,8	6	1	00450 01 1	0,350	1	1	08857 38 0 12
60 / 36	96,3	60,0	36,3	6	1	00450 01 1	0,360	1	1	08857 37 0 12
45 / 55	99,0	44,5	54,5	6	1	00450 01 1	0,370	1	1	08857 31 0 12
55 / 45	99,0	54,5	44,5	6	1	00450 01 1	0,370	1	1	08857 35 0 12
60 / 46	105,0	60,0	45,8	6	1	00450 01 1	0,385	1	1	08857 40 0 12
31 / 80	110,8	30,8	80,0	6	1	00450 01 1	0,410	1	1	08857 13 0 12



- Double cylinder with thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

31 / 51	61,6	30,8	30,8	6	1	00450 01 1	0,264	1	1	08887 04 0 12
47 / 31	73,3	42,5	30,8	6	1	00450 01 1	0,310	1	1	08887 12 0 12
60 / 31	90,3	50,5	30,8	6	1	00450 01 1	0,370	1	1	08887 30 0 12
47 / 51	98,8	68,0	30,8	6	1	00450 01 1	0,399	1	1	08887 53 0 12

TO BE DISCONTINUED

SP

Technical features:

- Patented system
- Registered key.
- brass body
- brass plug
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- side stainless steel balls
- drivers:
 - in brass, cylindrical and mushroom-like for an antipicking function
 - in hardened steel in first position
- phosphor bronze springs
- KEY:
 - in nickel silver alloy
 - numbered on key bow

Supplied as standard:

- 3 keys
- CODE CARD
- Fixing screws
- Fixing plates

Finishes:

- STANDARD: nickel-plated brass (fin. 12)

Patents:

- Key is protected by a Shape trademark B02004C000170

Type	Description	For locks series	L	Pins	Key item	Unit weight Kg	Pieces	ITEM						
								Type	Dim.	Hand	Fin.	Pers.	Spec.	
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 54315, 54340, 54570	6	6	1 00450 01 1	0,225	1	1	02502	00	0	12		
	• Rim cylinder with nickel-plated tear and drill resistant rose		6	6	1 00450 01 1	0,219	1	1	02502	10	0	12		
	• Round cylinder • For further length see item 07165	1A671, 11671, 50171, 50131, 50181, 50411, 50431, 50571, 50531, 45131, 4341	50,0	6	1 00450 01 1	0,170	1	1	02572	50	0	12		
	• Cylinder set	11670	6	6	1 00450 01 1	0,280	1	1	02164	00	0	12		
	• Cylinder set, with round external cylinder	11671, 11761, 11771	50,0	6	1 00450 01 1	0,280	1	1	02163	00	0	12		
		11721, 11921	50,0	6	1 00450 01 1	0,260	1	1	02179	00	0	12		
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	5	1 00450 01 1	0,260	6	1	02180	00	0	12		

TO BE DISCONTINUED



Technical features:

- Patented system
- Registered key.
- brass body
- brass plug
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- side stainless steel balls
- drivers:
 - in brass, cylindrical and mushroom-like for an antipicking function
 - in hardened steel in first position
- phosphor bronze spring
- KEY:
 - in nickel silver alloy
 - numbered on key bow

Supplied as standard:

- 3 keys
- Code Card
- Fixing screws

Finishes:

- Nickel-plated brass (fin. 12)

Patents:

- Key is protected by a Shape trademark B02004C000170

SP

Type	Description	Door thickness Pins	Key item	Kg Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Cylinder for padlocks: series 28052 - 28352 - 28552 • 2 keys • Pickled brass body • Complete with plate 	6	1 00450 01 1	0,120	1	1	02652	01	0	
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.28.0 • Sanded brass 		1 00450 01 1	0,120	1	1	02652	10	0	
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 • Sanded brass 	6	1 00450 01 1	0,120	1	1	02652	11	0	
	<ul style="list-style-type: none"> • Vertical key extraction • Deadbolt item 1.06414.20.0 or item 1.06414.30.0 (to order separately) 	17	6 1 00450 01 1	0,195	1	1	72275	26	0 12	
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	6 1 00450 01 1	0,145	1	1	72276	03	0 12	

TO BE DISCONTINUED



Asix

Technical features:

- brass body
- brass plugs
- self-lubricating sintered steel projecting DIN cam
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting cam, DIN-compatible
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - long key for protective roses compatibility
 - numerical coding on the head

Supplied as standard:

- 3 keys
- Fixing screw


Finishes:

- STANDARD: sanded brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12)

Standards:

- Compliant with EN 1303:2005
- Attack Resistance: grade 0
- Key Related Security: grade 5
- Durability: grade 6


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.



• Double cylinder


28 / 28	55,4	27,7	27,7	6	1	00670 01 0	0,216	6	1	OE300 05 0
30 / 30	59,0	29,5	29,5	6	1	00670 01 0	0,223	6	1	OE300 07 0
28 / 32	59,2	27,7	31,5	6	1	00670 01 0	0,225	6	1	OE300 08 0
28 / 34	61,2	27,7	33,5	6	1	00670 01 0	0,230	6	1	OE300 06 0
28 / 36	63,2	27,7	35,5	6	1	00670 01 0	0,242	6	1	OE300 09 0
30 / 35	64,0	29,5	34,5	6	1	00670 01 0	0,233	6	1	OE300 26 0
33 / 33	65,0	32,5	32,5	6	1	00670 01 0	0,242	6	1	OE300 10 0
35 / 35	69,0	34,5	34,5	6	1	00670 01 0	0,267	6	1	OE300 13 0
40 / 30	69,0	39,5	29,5	6	1	00670 01 0	0,258	6	1	OE300 12 0
28 / 43	70,2	27,7	42,5	6	1	00670 01 0	0,275	6	1	OE300 11 0
30 / 45	74,0	29,5	44,5	6	1	00670 01 0	0,264	6	1	OE300 27 0
35 / 40	74,0	34,5	39,5	6	1	00670 01 0	0,264	6	1	OE300 28 0
30 / 50	79,0	29,5	49,5	6	1	00670 01 0	0,279	6	1	OE300 17 0
35 / 45	79,0	34,5	44,5	6	1	00670 01 0	0,279	6	1	OE300 19 0
40 / 40	79,0	39,5	39,5	6	1	00670 01 0	0,279	6	1	OE300 18 0
30 / 55	84,0	29,5	54,5	6	1	00670 01 0	0,294	6	1	OE300 33 0
35 / 50	84,0	34,5	49,5	6	1	00670 01 0	0,294	6	1	OE300 31 0
40 / 45	84,0	39,5	44,5	6	1	00670 01 0	0,294	6	1	OE300 30 0
30 / 60	89,0	29,5	59,5	6	1	00670 01 0	0,323	6	1	OE300 20 0
35 / 55	89,0	34,5	54,5	6	1	00670 01 0	0,310	6	1	OE300 32 0
40 / 50	89,0	39,5	49,5	6	1	00670 01 0	0,310	6	1	OE300 21 0
45 / 45	89,0	44,5	44,5	6	1	00670 01 0	0,310	6	1	OE300 29 0
30 / 65	94,0	29,5	64,5	6	1	00670 01 0	0,324	6	1	OE300 41 0
35 / 60	94,0	34,5	59,5	6	1	00670 01 0	0,324	6	1	OE300 38 0
40 / 55	94,0	39,5	54,5	6	1	00670 01 0	0,341	6	1	OE300 42 0
45 / 50	94,0	44,5	49,5	6	1	00670 01 0	0,324	6	1	OE300 39 0
30 / 70	99,0	29,5	69,5	6	1	00670 01 0	0,339	6	1	OE300 24 0
35 / 65	99,0	34,5	64,5	6	1	00670 01 0	0,339	6	1	OE300 22 0
40 / 60	99,0	39,5	59,5	6	1	00670 01 0	0,339	6	1	OE300 25 0
45 / 55	99,0	44,5	54,5	6	1	00670 01 0	0,339	6	1	OE300 43 0
50 / 50	99,0	49,5	49,5	6	1	00670 01 0	0,339	6	1	OE300 23 0
30 / 80	109,0	29,5	79,5	6	1	00670 01 0	0,368	6	1	OE300 37 0
40 / 70	109,0	39,5	69,5	6	1	00670 01 0	0,368	6	1	OE300 35 0
50 / 60	109,0	49,5	59,5	6	1	00670 01 0	0,368	6	1	OE300 36 0
55 / 55	109,0	54,5	54,5	6	1	00670 01 0	0,368	6	1	OE300 70 0
55 / 60	114,0	54,5	59,5	6	1	00670 01 0	0,368	6	1	OE300 71 0
60 / 60	119,0	59,5	59,5	6	1	00670 01 0	0,368	6	1	OE300 40 0

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Phs				Type	Dim.	Hand	Fin.	Pers.

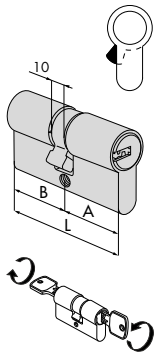

• Clutch-type double cylinder


30 / 30	59,0	29,5	29,5	6	1	00670 01 0	0,225	6	1	OE301 07 0				
28 / 34	61,2	27,7	33,5	6	1	00670 01 0	0,225	6	1	OE301 06 0				
28 / 36	63,2	27,7	35,5	6	1	00670 01 0	0,225	6	1	OE301 09 0				
30 / 35	64,0	29,5	34,5	6	1	00670 01 0	0,225	6	1	OE301 26 0				
33 / 33	65,0	32,5	32,5	6	1	00670 01 0	0,225	6	1	OE301 10 0				
35 / 35	69,0	34,5	34,5	6	1	00670 01 0	0,225	6	1	OE301 13 0				
40 / 30	69,0	39,5	29,5	6	1	00670 01 0	0,225	6	1	OE301 12 0				
28 / 43	70,2	27,7	42,5	6	1	00670 01 0	0,225	6	1	OE301 11 0				
30 / 45	74,0	29,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 27 0				
35 / 40	74,0	34,5	39,5	6	1	00670 01 0	0,225	6	1	OE301 28 0				
30 / 50	79,0	29,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 17 0				
35 / 45	79,0	34,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 19 0				
40 / 40	79,0	39,5	39,5	6	1	00670 01 0	0,225	6	1	OE301 18 0				
30 / 55	84,0	29,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 33 0				
35 / 50	84,0	34,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 31 0				
40 / 45	84,0	39,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 30 0				
30 / 60	89,0	29,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 20 0				
35 / 55	89,0	34,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 32 0				
40 / 50	89,0	39,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 21 0				
45 / 45	89,0	44,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 29 0				
30 / 65	94,0	29,5	64,5	6	1	00670 01 0	0,225	6	1	OE301 41 0				
35 / 60	94,0	34,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 38 0				
40 / 55	94,0	39,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 42 0				
45 / 50	94,0	44,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 39 0				
30 / 70	99,0	29,5	69,5	6	1	00670 01 0	0,225	6	1	OE301 24 0				
35 / 65	99,0	34,5	64,5	6	1	00670 01 0	0,225	6	1	OE301 22 0				
40 / 60	99,0	39,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 25 0				
45 / 55	99,0	44,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 43 0				
50 / 50	99,0	49,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 23 0				
30 / 80	109,0	29,5	79,5	6	1	00670 01 0	0,225	6	1	OE301 37 0				
40 / 70	109,0	39,5	69,5	6	1	00670 01 0	0,225	6	1	OE301 35 0				
50 / 60	109,0	49,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 36 0				
55 / 55	109,0	54,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 70 0				
55 / 60	114,0	54,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 71 0				



• Double cylinder


25 / 10	34,5	24,5	10,0	6	1	00670 01 0	0,164	6	1	OE304 18 0				
30 / 10	39,5	29,5	10,0	6	1	00670 01 0	0,164	6	1	OE304 02 0				
35 / 10	44,5	34,5	10,0	6	1	00670 01 0	0,179	6	1	OE304 07 0				
37 / 10	46,5	36,5	10,0	6	1	00670 01 0	0,185	6	1	OE304 10 0				
40 / 10	49,5	39,5	10,0	6	1	00670 01 0	0,195	6	1	OE304 03 0				
45 / 10	54,5	44,5	10,0	6	1	00670 01 0	0,207	6	1	OE304 08 0				
50 / 10	59,5	49,5	10,0	6	1	00670 01 0	0,222	6	1	OE304 04 0				
60 / 10	69,5	59,5	10,0	6	1	00670 01 0	0,252	6	1	OE304 05 0				
65 / 10	74,5	64,5	10,0	6	1	00670 01 0	0,267	6	1	OE304 21 0				
70 / 10	79,5	69,5	10,0	6	1	00670 01 0	0,282	6	1	OE304 06 0				
80 / 10	89,5	79,5	10,0	6	1	00670 01 0	0,312	6	1	OE304 20 0				
90 / 10	103,5	93,5	10,0	6	1	00620 01 0	0,357	6	1	OE304 13 0				

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.




- Double cylinder with thumb turn shaft
- ON REQUEST:Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,239	6	1	OE302	07	0			
30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,254	6	1	OE302	26	0			
35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,254	6	1	OE302	81	0			
30 / 40	69,0	29,5	39,5	6	1 00670 01 0	0,274	6	1	OE302	82	0			
35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,265	6	1	OE302	13	0			
40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,274	6	1	OE302	12	0			
35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,289	6	1	OE302	28	0			
30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,304	6	1	OE302	17	0			
35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,304	6	1	OE302	19	0			
40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,304	6	1	OE302	18	0			
40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,319	6	1	OE302	30	0			
45 / 40	84,0	44,5	39,5	6	1 00670 01 0	0,319	6	1	OE302	84	0			
43 / 43	85,0	42,5	42,5	6	1 00670 01 0	0,321	6	1	OE302	46	0			
30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,334	6	1	OE302	20	0			
45 / 45	89,0	44,5	44,5	6	1 00620 01 0	0,334	6	1	OE302	29	0			
40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,334	6	1	OE302	21	0			
40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,355	6	1	OE302	42	0			
45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,355	6	1	OE302	39	0			
45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,365	6	1	OE302	43	0			
50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,365	6	1	OE302	23	0			
45 / 60	104,0	44,5	59,5	6	1 00670 01 0	0,379	6	1	OE302	54	0			
55 / 50	104,0	54,5	49,5	6	1 00670 01 0	0,379	6	1	OE302	64	0			
50 / 60	109,0	49,5	59,5	6	1 00620 01 0	0,395	6	1	OE302	36	0			
60 / 60	119,0	59,5	59,5	6	1 00670 01 0	0,425	6	1	OE302	40	0			




- Nickel-plated double cylinder C2000 series with special cam 90° for series 46305 locks
- 3 keys
- Fixing screw

30 / 30	59,0	29,5	29,5	6		0,225	6	1	OE303	07	0	12		
---------	------	------	------	---	--	-------	---	---	-------	----	---	----	--	--



- Nickel-plated single cylinder C2000 series with special cam 90° for series 46305 locks
- 3 keys
- Fixing screw

30 / 10	39,5	29,5	10,0	6		0,164	6	1	OE305	02	0	12		
---------	------	------	------	---	--	-------	---	---	-------	----	---	----	--	--



- Double cylinder with adjustable thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST:Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,284	6	1	OE307	07	0			
40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,312	6	1	OE307	12	0			
35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,294	6	1	OE307	81	0			
45 / 30	74,0	44,5	29,5	6	1 00670 01 0	0,320	6	1	OE307	91	0			
50 / 30	79,0	49,5	29,5	6	1 00670 01 0	0,329	6	1	OE307	90	0			
60 / 30	89,0	59,5	29,5	6	1 00670 01 0	0,359	6	1	OE307	87	0			
70 / 30	99,0	69,5	29,5	6	1 00670 01 0	0,370	6	1	OE307	88	0			

Technical features:

- brass body
- brass plugs
- pins:
 - in wear-resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass, mushroom-type anti-picking and cylindrical
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting DIN cam
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - numerical coding on the head

Supplied as standard:






- 3 keys
- Fixing screws

Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)

Asix

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM							
			L	Pins			Kg		Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Rim cylinder	1A610	6	1 00670 01 0	0,182	6	1	0E500	00	0				
	• Round cylinder • For further lenght see item 07165	1A611	50,0	6 1 00670 01 0	0,170	6	1	0E200	50	0				
	• Cylinder set, with round external cylinder	11721, 11921	50,0	6 1 00670 01 0	0,255	6	1	0E149	00	0				
	• Cylinder set	1A630	6	1 00670 01 0	0,250	6	1	0E115	00	0				
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	6 1 00670 01 0	0,255	6	1	0E150	00	0				

Type	Description	For locks series	L	Pins	Key item	 Unit weight	 Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Cylinder for padlocks series 28000 • 2 keys 		6	1 00670 01 0	0,117	6	1	OE600	00	0		
	<ul style="list-style-type: none"> • Cylinder for external control item 1.07078.28.0 • Ground brass 		6	1 00670 01 0	0,117	6	1	OE600	10	0		
	<ul style="list-style-type: none"> • Cylinder for external control item 1.07078.29.0 • Ground brass 		6	1 00670 01 0	0,117	6	1	OE600	11	0		



Technical features:

- BKP (bumping resistant) registered patented
- 10 pins (6 active, 4 passive) key biting system
- brass body with segment pack extended through the entire length of the cylinder brass plugs
- self-lubricating sintered steel projecting DIN CAM
- pins and drivers in hardened steel
- phosphor bronze springs
- Flat reversible key
 - in a special brass alloy nickel plated
 - numbered on key head

Supplied as standard:

- 3 keys
- Code Card
- Fixing screw
- Operating and Maintenance Instructions.

On request:

- Key with long neck (pers. CL), with personalised plastic piece and profile (pers. CP)

Finishes:

- Standard: sanded brass (fin. 00)
- On request:
 - nickel plated brass (fin. 12)
 - polished brass (fin. 66)

Standards:

- Compliant with EN 1303:05
- Attack Resistance: grade 1
- Key Related Security: grade 6
- Durability: grade 6

Certifications:

- ICIM EN 1303:05 16010C61
- Gost - Russia
- SKG**


Patents:

- Snap system Europe EPI 583878
- Russia RU2361989
- BKP: PCT/WO2007/074163A1

Astral S


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

• Clutching systems double cylinders

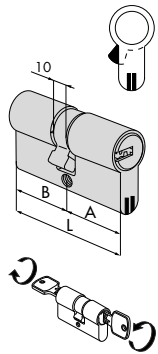


30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,234	12	1	0A3S1 07 0
28 / 34	61,2	27,7	33,5	10	1	00620 01 0	0,234	12	1	0A3S1 06 0
28 / 36	63,2	27,7	35,5	10	1	00620 01 0	0,234	12	1	0A3S1 09 0
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,243	12	1	0A3S1 26 0
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,234	12	1	0A3S1 10 0
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,234	12	1	0A3S1 13 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,234	12	1	0A3S1 12 0
28 / 43	70,2	27,7	42,5	10	1	00620 01 0	0,234	12	1	0A3S1 11 0
30 / 45	74,0	29,5	44,5	10	1	00620 01 0	0,243	12	1	0A3S1 27 0
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,243	12	1	0A3S1 28 0
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,234	12	1	0A3S1 17 0
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,234	12	1	0A3S1 19 0
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,234	12	1	0A3S1 18 0
30 / 55	84,0	29,5	54,5	10	1	00620 01 0	0,304	12	1	0A3S1 33 0
35 / 50	84,0	34,5	49,5	10	1	00620 01 0	0,319	12	1	0A3S1 31 0
40 / 45	84,0	39,5	44,5	10	1	00620 01 0	0,319	12	1	0A3S1 30 0
43 / 43	85,0	42,5	42,5	10	1	00620 01 0	0,304	12	1	0A3S1 46 0
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,304	12	1	0A3S1 20 0
35 / 55	89,0	34,5	54,5	10	1	00620 01 0	0,304	12	1	0A3S1 32 0
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,319	12	1	0A3S1 21 0
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,319	12	1	0A3S1 29 0
30 / 65	94,0	29,5	64,5	10	1	00620 01 0	0,319	6	1	0A3S1 41 0
35 / 60	94,0	34,5	59,5	10	1	00620 01 0	0,304	6	1	0A3S1 38 0
40 / 55	94,0	39,5	54,5	10	1	00620 01 0	0,319	6	1	0A3S1 42 0
45 / 50	94,0	44,5	49,5	10	1	00620 01 0	0,304	6	1	0A3S1 39 0
30 / 70	99,0	29,5	69,5	10	1	00620 01 0	0,349	6	1	0A3S1 24 0
35 / 65	99,0	34,5	64,5	10	1	00620 01 0	0,319	6	1	0A3S1 22 0
40 / 60	99,0	39,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1 25 0
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,349	6	1	0A3S1 43 0
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,319	6	1	0A3S1 23 0
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,349	6	1	0A3S1 37 0
40 / 70	109,0	39,5	69,5	10	1	00620 01 0	0,349	6	1	0A3S1 35 0
50 / 60	109,0	49,5	59,5	10	1	00620 01 0	0,319	6	1	0A3S1 36 0
55 / 55	109,0	54,5	54,5	10	1	00620 01 0	0,319	6	1	0A3S1 70 0
55 / 60	114,0	54,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1 71 0
60 / 60	119,0	59,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1 40 0

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.



- Double cylinders with thumb turn shaft
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,275	12	1	OA3S2	07 0
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,264	12	1	OA3S2	26 0
35 / 30	64,0	34,5	29,5	10	1	00620 01 0	0,264	12	1	OA3S2	81 0
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,264	12	1	OA3S2	10 0
30 / 40	69,0	29,5	39,5	10	1	00620 01 0	0,264	12	1	OA3S2	82 0
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,264	12	1	OA3S2	13 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,264	12	1	OA3S2	12 0
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,294	12	1	OA3S2	28 0
40 / 35	74,0	39,5	34,5	10	1	00620 01 0	0,294	12	1	OA3S2	83 0
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,318	6	1	OA3S2	17 0
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,318	6	1	OA3S2	19 0
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,318	6	1	OA3S2	18 0
40 / 45	84,0	39,5	44,5	10	1	00620 01 0	0,324	6	1	OA3S2	30 0
45 / 40	84,0	44,5	39,5	10	1	00620 01 0	0,324	6	1	OA3S2	84 0
50 / 35	84,0	49,5	34,5	10	1	00620 01 0	0,324	6	1	OA3S2	94 0
43 / 43	85,0	42,5	42,5	10	1	00620 01 0	0,324	6	1	OA3S2	46 0
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,324	6	1	OA3S2	20 0
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,324	6	1	OA3S2	21 0
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,324	6	1	OA3S2	29 0
40 / 55	94,0	39,5	54,5	10	1	00620 01 0	0,367	6	1	OA3S2	42 0
55 / 40	94,0	54,5	39,5	10	1	00620 01 0	0,367	6	1	OA3S2	98 0
45 / 50	94,0	44,5	49,5	10	1	00620 01 0	0,367	6	1	OA3S2	39 0
40 / 60	99,0	39,5	59,5	10	1	00620 01 0	0,370	6	1	OA3S2	25 0
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,370	6	1	OA3S2	43 0
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,370	6	1	OA3S2	23 0
45 / 60	104,0	44,5	59,5	10	1	00620 01 0	0,398	6	1	OA3S2	54 0
55 / 50	104,0	54,5	49,5	10	1	00620 01 0	0,398	6	1	OA3S2	64 0
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,400	6	1	OA3S2	37 0
40 / 70	109,0	39,5	69,5	10	1	00620 01 0	0,400	6	1	OA3S2	35 0
55 / 55	109,0	54,5	54,5	10	1	00620 01 0	0,400	6	1	OA3S2	70 0
60 / 50	109,0	59,5	49,5	10	1	00620 01 0	0,400	6	1	OA3S2	89 0
55 / 60	114,0	54,5	59,5	10	1	00620 01 0	0,415	6	1	OA3S2	71 0
55 / 65	119,0	54,5	64,5	10	1	00620 01 0	0,430	6	1	OA3S2	72 0
60 / 60	119,0	59,5	59,5	10	1	00620 01 0	0,430	6	1	OA3S2	40 0
65 / 55	119,0	64,5	54,5	10	1	00620 01 0	0,430	6	1	OA3S2	86 0



- Double cylinders with adjustable thumb turn shaft
- to be combined with inside rose item 1.06458.20
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,275	6	1	OA3S7	07 0
35 / 30	64,0	34,5	29,5	10	1	00620 01 0	0,275	6	1	OA3S7	81 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,264	6	1	OA3S7	12 0
45 / 30	74,0	44,5	29,5	10	1	00620 01 0	0,264	6	1	OA3S7	91 0
50 / 30	79,0	49,5	29,5	10	1	00620 01 0	0,329	6	1	OA3S7	90 0
55 / 30	84,0	54,5	29,5	10	1	00620 01 0	0,359	6	1	OA3S7	92 0
60 / 30	89,0	59,5	29,5	10	1	00620 01 0	0,359	6	1	OA3S7	87 0
70 / 30	99,0	69,5	29,5	10	1	00620 01 0	0,370	6	1	OA3S7	88 0



Astral

Technical features:

- 10 (6 active + 4 passive) pins key biting system
- brass body
- brass plugs
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting DIN cam
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - numbered on key bow

Supplied as standard:

- 3 keys
- Code Card
- Fixing screws

On request:

- Cylinders with long key (plastic bow), compatible with protective roses (pers. CL)

Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)


Standards:

- Compliant with EN 1303:2005
- Attack Resistance: grade 0
- Key Related Security: grade 6
- Durability: grade 6

Certifications:

- Gost - Russia
- SKG **


Type	Description	Comm. dim.	L	A	B	Pins	Key item	Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



• Double cylinder


28 / 28	55,4	27,7	27,7	10	1	00620 01 0	0,232	12	1	OA310 05 0
30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,235	12	1	OA310 07 0
28 / 32	59,2	27,7	31,5	10	1	00620 01 0	0,230	12	1	OA310 08 0
28 / 34	61,2	27,7	33,5	10	1	00620 01 0	0,234	12	1	OA310 06 0
28 / 36	63,2	27,7	35,5	10	1	00620 01 0	0,240	12	1	OA310 09 0
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,243	12	1	OA310 26 0
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,258	12	1	OA310 10 0
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,272	12	1	OA310 13 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,272	12	1	OA310 12 0
28 / 43	70,2	27,7	42,5	10	1	00620 01 0	0,262	12	1	OA310 11 0
30 / 45	74,0	29,5	44,5	10	1	00620 01 0	0,274	12	1	OA310 27 0
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,274	12	1	OA310 28 0
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,301	12	1	OA310 17 0
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,289	12	1	OA310 19 0
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,289	12	1	OA310 18 0
30 / 55	84,0	29,5	54,5	10	1	00620 01 0	0,304	12	1	OA310 33 0
35 / 50	84,0	34,5	49,5	10	1	00620 01 0	0,360	12	1	OA310 31 0
40 / 45	84,0	39,5	44,5	10	1	00620 01 0	0,304	12	1	OA310 30 0
43 / 43	85,0	42,5	42,5	10	1	00620 01 0	0,308	12	1	OA310 46 0
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,320	12	1	OA310 20 0
35 / 55	89,0	34,5	54,5	10	1	00620 01 0	0,332	12	1	OA310 32 0
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,320	12	1	OA310 21 0
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,333	12	1	OA310 29 0
30 / 65	94,0	29,5	64,5	10	1	00620 01 0	0,334	6	1	OA310 41 0
35 / 60	94,0	34,5	59,5	10	1	00620 01 0	0,390	6	1	OA310 38 0
40 / 55	94,0	39,5	54,5	10	1	00620 01 0	0,355	6	1	OA310 42 0
45 / 50	94,0	44,5	49,5	10	1	00620 01 0	0,334	6	1	OA310 39 0
30 / 70	99,0	29,5	69,5	10	1	00620 01 0	0,349	6	1	OA310 24 0
35 / 65	99,0	34,5	64,5	10	1	00620 01 0	0,349	6	1	OA310 22 0
40 / 60	99,0	39,5	59,5	10	1	00620 01 0	0,349	6	1	OA310 25 0
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,349	6	1	OA310 43 0
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,349	6	1	OA310 23 0
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,378	6	1	OA310 37 0
40 / 70	109,0	39,5	69,5	10	1	00620 01 0	0,400	6	1	OA310 35 0
50 / 60	109,0	49,5	59,5	10	1	00620 01 0	0,402	6	1	OA310 36 0
55 / 55	109,0	54,5	54,5	10	1	00620 01 0	0,378	6	1	OA310 70 0
55 / 60	114,0	54,5	59,5	10	1	00620 01 0	0,420	6	1	OA310 71 0
60 / 60	119,0	59,5	59,5	10	1	00620 01 0	0,410	6	1	OA310 40 0

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.




- Single cylinder with adjustable cam in 8 position

30 / 10	39,5	29,5	10,0	10	1	00620 01 0	0,186	12	1	OA314	02 0
35 / 10	44,5	34,5	10,0	10	1	00620 01 0	0,201	12	1	OA314	07 0
37 / 10	46,5	36,5	10,0	10	1	00620 01 0	0,190	12	1	OA314	10 0
40 / 10	49,5	39,5	10,0	10	1	00620 01 0	0,199	12	1	OA314	03 0
43 / 10	52,5	42,5	10,0	10	1	00620 01 0	0,208	12	1	OA314	11 0
45 / 10	54,5	44,5	10,0	10	1	00620 01 0	0,212	12	1	OA314	08 0
50 / 10	59,5	49,5	10,0	10	1	00620 01 0	0,227	12	1	OA314	04 0
60 / 10	69,5	59,5	10,0	10	1	00620 01 0	0,257	12	1	OA314	05 0
65 / 10	74,5	64,5	10,0	10	1	00620 01 0	0,272	12	1	OA314	21 0
70 / 10	79,5	69,5	10,0	10	1	00620 01 0	0,287	12	1	OA314	06 0



- Double cylinder with thumb turn shaft
- ON REQUEST: Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,244	12	1	OA312	07 0
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,264	12	1	OA312	26 0
35 / 30	64,0	34,5	29,5	10	1	00620 01 0	0,259	12	1	OA312	81 0
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,267	12	1	OA312	10 0
30 / 40	69,0	29,5	39,5	10	1	00620 01 0	0,279	12	1	OA312	82 0
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,279	12	1	OA312	13 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,279	12	1	OA312	12 0
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,294	12	1	OA312	28 0
40 / 35	74,0	39,5	34,5	10	1	00620 01 0	0,294	12	1	OA312	83 0
30 / 45	74,0	29,5	44,5	10	1	00620 01 0	0,350	12	1	OA312	27 0
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,318	6	1	OA312	17 0
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,309	6	1	OA312	19 0
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,309	6	1	OA312	18 0
45 / 35	79,0	44,5	34,5	10	1	00620 01 0	0,309	6	1	OA312	85 0
45 / 40	84,0	44,5	39,5	10	1	00620 01 0	0,324	6	1	OA312	84 0
50 / 35	84,0	49,5	34,5	10	1	00620 01 0	0,324	6	1	OA312	94 0
43 / 43	85,0	42,5	42,5	10	1	00620 01 0	0,326	6	1	OA312	46 0
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,353	6	1	OA312	20 0
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,350	6	1	OA312	21 0
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,347	6	1	OA312	29 0
40 / 55	94,0	39,5	54,5	10	1	00620 01 0	0,355	6	1	OA312	42 0
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,370	6	1	OA312	43 0
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,370	6	1	OA312	23 0
45 / 60	104,0	44,5	59,5	10	1	00620 01 0	0,398	6	1	OA312	54 0
55 / 50	104,0	54,5	49,5	10	1	00620 01 0	0,384	6	1	OA312	64 0
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,400	6	1	OA312	37 0
50 / 60	109,0	49,5	59,5	10	1	00620 01 0	0,400	6	1	OA312	36 0
60 / 50	109,0	59,5	49,5	10	1	00620 01 0	0,410	6	1	OA312	89 0
55 / 65	119,0	54,5	64,5	10	1	00620 01 0	0,430	6	1	OA312	72 0
60 / 60	119,0	59,5	59,5	10	1	00620 01 0	0,430	6	1	OA312	40 0
65 / 55	119,0	64,5	54,5	10	1	00620 01 0	0,430	6	1	OA312	86 0



- Double cylinder with adjustable thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST: Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,284	6	1	OA317	07 0
35 / 30	64,0	34,5	29,5	10	1	00620 01 0	0,312	6	1	OA317	81 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,312	6	1	OA317	12 0
50 / 30	79,0	49,5	29,5	10	1	00620 01 0	0,329	6	1	OA317	90 0
60 / 30	89,0	59,5	29,5	10	1	00620 01 0	0,359	6	1	OA317	87 0
70 / 30	99,0	69,5	29,5	10	1	00620 01 0	0,370	6	1	OA317	88 0



Technical features:

- 10 (6 active + 4 passive) pins key biting system
- brass body
- brass plug
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - numbered on key bow






Supplied as standard:

- 3 keys
- Code Card
- Fixing screws
- Fixing plates


Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)

Astral

Type	Description	For locks series	Key item				ITEM	
			L	Pins	Unit weight Kg	Pieces	Type	Dim. Hand Fin. Pers. Spec.
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54552, 54570	10	1 00620 01 0	0,204	6	1	0A510 00 0
	• Rim cylinder with nickel-plated tear and drill resistant rose		10	1 00620 01 0	0,270	6	1	0A510 11 0
	• Round cylinder • For further lenght see item 07165	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	10 1 00620 01 0	0,160	6	1	0A210 50 0
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220	10	1 00620 01 0	0,267	6	1	0A112 00 0
		11630	10	1 00620 01 0	0,267	6	1	0A114 00 0
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	10 1 00620 01 0	0,233	6	1	0A150 00 0

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM				
			L	Pins			Kg	Pieces	Type	Dim.	Hand



- Cylinder set, with round external cylinder

50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571

50,0 10 1 00620 01 0 0,233 6

1 0A116 00 0

11631, 11731, 11931

50,0 10 1 00620 01 0 0,253 6

1 0A120 00 0

11721, 11921


50,0 10 1 00620 01 0 0,253 6

1 0A149 00 0

11671, 11761, 11771

50,0 10 1 00620 01 0 0,253 6

1 0A155 00 0



- Cylinder set

1A630

10 1 00620 01 0 0,267 6

1 0A115 00 0



Technical features:


- 10 (6 active + 4 passive) pins key biting system
- brass body
- brass plug
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - numbered on key bow

Supplied as standard:

- 3 keys
 - Code Card
 - Fixing screws
 - Fixing plates
- Finishes:**
- Nickel-plated brass (fin. 12)

Astral

Type	Description	Door thickness	Pins	Key item	Unit weight 	Pieces 	ITEM						
							Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • Small cylinder for padlocks: series 28053 - 28353 - 28553 • 2 keys • Pickled brass body • Complete with plate 	10	10	1 00620 01 0	0,106	6	1	0A610	00	0			
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.28.0 	10	10	1 00620 01 0	0,106	6	1	0A610	10	0			
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 	10	10	1 00620 01 0	0,106	6	1	0A610	11	0			
	<ul style="list-style-type: none"> • Vertical key extraction • Deadbolt item 1.06414.20.0 or item 1.06414.30.0 (to order separately) 	17	10	1 00620 01 0	0,195	1	1	0A410	00	0			
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10	1 00620 01 0	0,140	1	1	0A415	01	0			



CISA RATING

4 4 3 5

Sicurezza Security Affidabilità Reliability

Sistemistica Master keying potential

BKP

CISA Security Card Astral Tekno

Technical features:

- Cisa patented system
- BKP (Bump Key Power) bumping resistant
- 10 pin (6 active, 4 passive) key biting system
- Security Card: protected key duplication
- Brass casing
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Variable shape hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
 - reversible flat key
 - nickel-plated brass key
 - plastic material head
 - long neck, compatible with protective roses

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Operating and maintenance Instructions

Finishes:

- STANDARD:
 - nickel-plated brass (fin. 12)
- ON REQUEST:
 - polished brass (fin. 66)

Standards:

- Compliant with the EN 1303:05 standard
- Attack Resistance: class 0
- Key Related Security: class 6
- Durability: class 6

Certifications:


- Gost - Russia
- SKG**

Patents:

- Key: EP 1 867 810 B1
- BKP: PCT/WO 2007/074163 A1

Astral Tekno


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

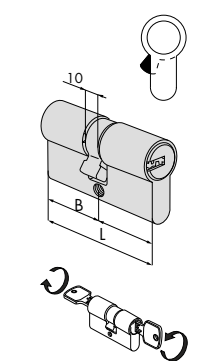

• Clutching system double cylinder


30 / 30	59,0	29,5	29,5	10	1	00690 00 0 00CL	0,235	1	1	OM311 07 0 12 CL
28 / 34	61,2	27,7	33,5	10	1	00690 00 0 00CL	0,235	1	1	OM311 06 0 12 CL
28 / 36	63,2	27,7	35,5	10	1	00690 00 0 00CL	0,238	1	1	OM311 09 0 12 CL
30 / 35	64,0	29,5	34,5	10	1	00690 00 0 00CL	0,238	1	1	OM311 26 0 12 CL
33 / 33	65,0	32,5	32,5	10	1	00690 00 0 00CL	0,238	1	1	OM311 10 0 12 CL
35 / 35	69,0	34,5	34,5	10	1	00690 00 0 00CL	0,272	1	1	OM311 13 0 12 CL
40 / 30	69,0	39,5	29,5	10	1	00690 00 0 00CL	0,272	1	1	OM311 12 0 12 CL
28 / 43	70,2	27,7	42,5	10	1	00690 00 0 00CL	0,272	1	1	OM311 11 0 12 CL
30 / 45	74,0	29,5	44,5	10	1	00690 00 0 00CL	0,274	1	1	OM311 27 0 12 CL
35 / 40	74,0	34,5	39,5	10	1	00690 00 0 00CL	0,274	1	1	OM311 28 0 12 CL
30 / 50	79,0	29,5	49,5	10	1	00690 00 0 00CL	0,289	1	1	OM311 17 0 12 CL
35 / 45	79,0	34,5	44,5	10	1	00690 00 0 00CL	0,289	1	1	OM311 19 0 12 CL
40 / 40	79,0	39,5	39,5	10	1	00690 00 0 00CL	0,289	1	1	OM311 18 0 12 CL
30 / 55	84,0	29,5	54,5	10	1	00690 00 0 00CL	0,304	1	1	OM311 33 0 12 CL
35 / 50	84,0	34,5	49,5	10	1	00690 00 0 00CL	0,304	1	1	OM311 31 0 12 CL
40 / 45	84,0	39,5	44,5	10	1	00690 00 0 00CL	0,304	1	1	OM311 30 0 12 CL
43 / 43	85,0	42,5	42,5	10	1	00690 00 0 00CL	0,310	1	1	OM311 46 0 12 CL
30 / 60	89,0	29,5	59,5	10	1	00690 00 0 00CL	0,320	1	1	OM311 20 0 12 CL
35 / 55	89,0	34,5	54,5	10	1	00690 00 0 00CL	0,320	1	1	OM311 32 0 12 CL
40 / 50	89,0	39,5	49,5	10	1	00690 00 0 00CL	0,320	1	1	OM311 21 0 12 CL
45 / 45	89,0	44,5	44,5	10	1	00690 00 0 00CL	0,320	1	1	OM311 29 0 12 CL
30 / 65	94,0	29,5	64,5	10	1	00690 00 0 00CL	0,330	1	1	OM311 41 0 12 CL
35 / 60	94,0	34,5	59,5	10	1	00690 00 0 00CL	0,330	1	1	OM311 38 0 12 CL
40 / 55	94,0	39,5	54,5	10	1	00690 00 0 00CL	0,330	1	1	OM311 42 0 12 CL
45 / 50	94,0	44,5	49,5	10	1	00690 00 0 00CL	0,330	1	1	OM311 39 0 12 CL
30 / 70	99,0	29,5	69,5	10	1	00690 00 0 00CL	0,340	1	1	OM311 24 0 12 CL
35 / 65	99,0	34,5	64,5	10	1	00690 00 0 00CL	0,340	1	1	OM311 22 0 12 CL
40 / 60	99,0	39,5	59,5	10	1	00690 00 0 00CL	0,340	1	1	OM311 25 0 12 CL
45 / 55	99,0	44,5	54,5	10	1	00690 00 0 00CL	0,340	1	1	OM311 43 0 12 CL
50 / 50	99,0	49,5	49,5	10	1	00690 00 0 00CL	0,340	1	1	OM311 23 0 12 CL
30 / 80	109,0	29,5	79,5	10	1	00690 00 0 00CL	0,360	1	1	OM311 37 0 12 CL
40 / 70	109,0	39,5	69,5	10	1	00690 00 0 00CL	0,360	1	1	OM311 35 0 12 CL
50 / 60	109,0	49,5	59,5	10	1	00690 00 0 00CL	0,360	1	1	OM311 36 0 12 CL
40 / 80	119,0	39,5	79,5	10	1	00690 00 0 00CL	0,380	1	1	OM311 60 0 12 CL
55 / 55	109,0	54,5	54,5	10	1	00690 00 0 00CL	0,360	1	1	OM311 70 0 12 CL
50 / 65	114,0	49,5	64,5	10	1	00690 00 0 00CL	0,370	1	1	OM311 65 0 12 CL
55 / 60	114,0	54,5	59,5	10	1	00690 00 0 00CL	0,370	1	1	OM311 71 0 12 CL
60 / 60	119,0	59,5	59,5	10	1	00690 00 0 00CL	0,380	1	1	OM311 40 0 12 CL

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Phs				Type	Dim.	Hand	Fin.



- Single cylinder with adjustable cam in 8 position

30 / 10	39,5	29,5	10,0	10	1 00690 00 0 00CL	0,186	1	1	OM314	02 0	12	CL
33 / 10	42,5	32,5	10,0	10	1 00690 00 0 00CL	0,195	1	1	OM314	09 0	12	CL
35 / 10	44,5	34,5	10,0	10	1 00690 00 0 00CL	0,200	1	1	OM314	07 0	12	CL
37 / 10	46,5	36,5	10,0	10	1 00690 00 0 00CL	0,205	1	1	OM314	10 0	12	CL
40 / 10	49,5	39,5	10,0	10	1 00690 00 0 00CL	0,210	1	1	OM314	03 0	12	CL
43 / 10	52,5	42,5	10,0	10	1 00690 00 0 00CL	0,215	1	1	OM314	11 0	12	CL
45 / 10	54,5	44,5	10,0	10	1 00690 00 0 00CL	0,220	1	1	OM314	08 0	12	CL
50 / 10	59,5	49,5	10,0	10	1 00690 00 0 00CL	0,225	1	1	OM314	04 0	12	CL
55 / 10	64,5	54,5	10,0	10	1 00690 00 0 00CL	0,186	1	1	OM314	35 0	12	CL
60 / 10	69,5	59,5	10,0	10	1 00690 00 0 00CL	0,235	1	1	OM314	05 0	12	CL
65 / 10	74,5	64,5	10,0	10	1 00690 00 0 00CL	0,240	1	1	OM314	21 0	12	CL
70 / 10	79,5	69,5	10,0	10	1 00690 00 0 00CL	0,245	1	1	OM314	06 0	12	CL
80 / 10	89,5	79,5	10,0	10	1 00690 00 0 00CL	0,255	1	1	OM314	20 0	12	CL
95 / 10	104,5	94,5	10,0	10	1 00690 00 0 00CL	0,260	1	1	OM314	13 0	12	CL



- Double cylinder with thumb turn shaft
- ON REQUEST:
Knobs series 06353,
06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1 00690 00 0 00CL	0,244	1	1	OM312	07 0	12	CL
30 / 35	64,0	29,5	34,5	10	1 00690 00 0 00CL	0,259	1	1	OM312	26 0	12	CL
35 / 30	64,0	34,5	29,5	10	1 00690 00 0 00CL	0,259	1	1	OM312	81 0	12	CL
33 / 33	65,0	32,5	32,5	10	1 00690 00 0 00CL	0,259	1	1	OM312	10 0	12	CL
30 / 40	69,0	29,5	39,5	10	1 00690 00 0 00CL	0,279	1	1	OM312	82 0	12	CL
35 / 35	69,0	34,5	34,5	10	1 00690 00 0 00CL	0,279	1	1	OM312	13 0	12	CL
35 / 40	74,0	34,5	39,5	10	1 00690 00 0 00CL	0,294	1	1	OM312	28 0	12	CL
30 / 45	74,0	29,5	44,5	10	1 00690 00 0 00CL	0,294	1	1	OM312	27 0	12	CL
40 / 35	74,0	39,5	34,5	10	1 00690 00 0 00CL	0,294	1	1	OM312	83 0	12	CL
45 / 30	74,0	44,5	29,5	10	1 00690 00 0 00CL	0,294	1	1	OM312	91 0	12	CL
30 / 50	79,0	29,5	49,5	10	1 00690 00 0 00CL	0,309	1	1	OM312	17 0	12	CL
40 / 40	79,0	39,5	39,5	10	1 00690 00 0 00CL	0,309	1	1	OM312	18 0	12	CL
40 / 30	69,0	39,5	29,5	10	1 00690 00 0 00CL	0,279	1	1	OM312	12 0	12	CL
35 / 45	79,0	34,5	44,5	10	1 00690 00 0 00CL	0,309	1	1	OM312	19 0	12	CL
45 / 35	79,0	44,5	34,5	10	1 00690 00 0 00CL	0,309	1	1	OM312	85 0	12	CL
40 / 45	84,0	39,5	44,5	10	1 00690 00 0 00CL	0,324	1	1	OM312	30 0	12	CL
45 / 40	84,0	44,5	39,5	10	1 00690 00 0 00CL	0,324	1	1	OM312	84 0	12	CL
50 / 35	84,0	49,5	34,5	10	1 00690 00 0 00CL	0,324	1	1	OM312	94 0	12	CL
43 / 43	85,0	42,5	42,5	10	1 00690 00 0 00CL	0,324	1	1	OM312	46 0	12	CL
30 / 60	89,0	29,5	59,5	10	1 00690 00 0 00CL	0,344	1	1	OM312	20 0	12	CL
40 / 50	89,0	39,5	49,5	10	1 00690 00 0 00CL	0,344	1	1	OM312	21 0	12	CL
45 / 45	89,0	44,5	44,5	10	1 00690 00 0 00CL	0,344	1	1	OM312	29 0	12	CL
40 / 55	94,0	39,5	54,5	10	1 00690 00 0 00CL	0,364	1	1	OM312	42 0	12	CL
55 / 40	94,0	54,5	39,5	10	1 00690 00 0 00CL	0,364	1	1	OM312	98 0	12	CL
45 / 50	94,0	44,5	49,5	10	1 00690 00 0 00CL	0,364	1	1	OM312	39 0	12	CL
40 / 60	99,0	39,5	59,5	10	1 00690 00 0 00CL	0,384	1	1	OM312	25 0	12	CL
45 / 55	99,0	44,5	54,5	10	1 00690 00 0 00CL	0,384	1	1	OM312	43 0	12	CL
50 / 50	99,0	49,5	49,5	10	1 00690 00 0 00CL	0,384	1	1	OM312	23 0	12	CL
45 / 60	104,0	44,5	59,5	10	1 00690 00 0 00CL	0,394	1	1	OM312	54 0	12	CL
55 / 50	104,0	54,5	49,5	10	1 00690 00 0 00CL	0,394	1	1	OM312	64 0	12	CL
30 / 80	109,0	29,5	79,5	10	1 00690 00 0 00CL	0,410	1	1	OM312	37 0	12	CL
40 / 70	109,0	39,5	69,5	10	1 00690 00 0 00CL	0,410	1	1	OM312	35 0	12	CL
50 / 60	109,0	49,5	59,5	10	1 00690 00 0 00CL	0,410	1	1	OM312	36 0	12	CL

Type	Description	Comm. dim.				Key item	Unit weight Kg	Pieces	ITEM						
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.	Spec.	
<ul style="list-style-type: none"> • Double cylinder with adjustable thumb turn shaft • To be combined with inside rose item 1.06458.20 • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 	30 / 30	59,0	29,5	29,5	10	1 00690 00 0 00CL	0,275	1	1	OM317 07 0 12	CL				
	35 / 30	64,0	34,5	29,5	10	1 00690 00 0 00CL	0,285	1	1	OM317 81 0 12	CL				
	40 / 30	69,0	39,5	29,5	10	1 00690 00 0 00CL	0,295	1	1	OM317 12 0 12	CL				
	45 / 30	74,0	44,5	29,5	10	1 00690 00 0 00CL	0,305	1	1	OM317 91 0 12	CL				
	50 / 30	79,0	49,5	29,5	10	1 00690 00 0 00CL	0,315	1	1	OM317 90 0 12	CL				
	55 / 30	84,0	54,5	29,5	10	1 00690 00 0 00CL	0,325	1	1	OM317 92 0 12	CL				
	60 / 30	89,0	59,5	29,5	10	1 00690 00 0 00CL	0,335	1	1	OM317 87 0 12	CL				
	65 / 30	94,0	64,5	29,5	10	1 00690 00 0 00CL	0,345	1	1	OM317 A3 0 12	CL				
	70 / 30	99,0	69,5	29,5	10	1 00690 00 0 00CL	0,355	1	1	OM317 88 0 12	CL				
	80 / 30	109,0	79,5	29,5	10	1 00690 00 0 00CL	0,375	1	1	OM317 93 0 12	CL				



Technical features:

- Cisa patented system
- 10 pin (6 active, 4 passive) key biting system
- Security Card: protected key duplication
- Brass casing
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Variable shape hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
 - reversible flat key
 - nickel-plated brass key
 - plastic material head
 - long neck, compatible with protective roses

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Fixing roses
- Operating and maintenance Instructions

Finishes:

- STANDARD:
 - nickel-plated brass (fin. 12)
- ON REQUEST:
 - polished brass (fin. 66)






Certifications:




- Gost - Russia

Patents:

- Key: EP 1 867 810 B1

Astral Tekno

Type	Description	For locks series	Key item		Kg	Pieces	ITEM	
			L	Pins				Unit weight
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	10	10069000 0 00CL	0,204	1	1 0M510 00 0 12 CL	
	• Rim cylinder with plated tear and drill resistant rose		10	10069000 0 00CL	0,325	1	1 0M510 10 0 12 CL	
	• Round cylinder • For further lenght see item 07165	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	10 10069000 0 00CL	0,160	1	1 0M210 50 0 12 CL	
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	10 10069000 0 00CL	0,267	1	1 0M150 00 0 12 CL	
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220	10	10069000 0 00CL	0,267	1	1 0M112 00 0 12 CL	
		11630	10	10069000 0 00CL	0,267	1	1 0M114 00 0 12 CL	

Type	Description	For locks series	Key item				ITEM						
			L	Plms	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> Cylinder set, with round external cylinder 	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571	10	1	0069000 0 00CL	0,267	1	1	0M116	00	0	12	CL
		11631, 11731, 11931	10	1	0069000 0 00CL	0,267	1	1	0M120	00	0	12	CL
	<ul style="list-style-type: none"> Cylinder set, with round external cylinder 	11670	10	1	0069000 0 00CL	0,267	1	1	0M156	00	0	12	CL
	<ul style="list-style-type: none"> Cylinder set, with round external cylinder 	11721, 11921	50,0	10	1 0069000 0 00CL	0,267	1	1	0M149	00	0	12	CL
		11671, 11761, 11771	50,0	10	1 0069000 0 00CL	0,267	1	1	0M155	00	0	12	CL



Technical features:

- Cisa patented system
- 10 pin (6 active, 4 passive) key biting system
- Security Card: protected key duplication
- Brass casing
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Variable shape hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
 - reversible flat key
 - nickel-plated brass key
 - plastic material head
 - long neck, compatible with protective roses

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Operating and maintenance Instructions

Finishes:

- STANDARD:
 - nickel-plated brass (fin. 12)

Certifications:

Gost - Russia

Patents:

Key: EP 1 867 810 B1

Astral Tekno

Type	Description	Door thickness Pins	Key item	Kg Unit weight	Pcs Pieces	ITEM					
						Type	Dim.	Hand	Fin. Pars. Spec.		
	<ul style="list-style-type: none"> • Steel plug for padlocks • 2 keys • Pickled brass body • Complete with plate item 1.07573.08.0 	10	1 00690 00 0 00CL	0,106	1	1	0M610	00	0	00	CL
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.28.0 	10	1 00690 00 0 00CL	0,117	1	1	0M610	10	0	12	CL
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 	10	1 00690 00 0 00CL	0,117	1	1	0M610	11	0	12	CL
	<ul style="list-style-type: none"> • Cylinder for Meroni "Premiapri" (push-to-open) knobs 	10	1 00690 00 0 00CL	0,117	1	1	0M610	12	0	12	CL
	<ul style="list-style-type: none"> • Key extraction position (0) • Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to order separately) 	17	10 1 00690 00 0 00CL	0,150	1	1	0M410	00	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10 1 00690 00 0 00CL	0,150	1	1	0M415	01	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10 1 00690 00 0 00CL	0,150	1	1	0M415	03	0	12	CL

CISA RATING

AP3 S

BKP **ALI**

Technical features:

- BKP (Bumping Resistant) registered patented
- CISA patented System: key with mobile element
- Security Card: keys can only be duplicated by CISA or CISA Solution Partners
- Brass body with segment pack extended through the entire length of the cylinder
- Brass plugs
- Pins in hardened steel
- Drivers in hardened steel cylindrical and mushroom-like for antipicking
- Phosphor bronze and steel springs
- Self-lubricating sintered steel projecting DIN cam
- Flat reversible keys:

- in nickel silver alloy
- compatible with protective roses
- numbered on key head

Supplied as standard:

- 3 Keys
- Security Card
- Fixing screws
- Operating and Maintenance Instructions.

On request:

- Cylinders with ALI keys (pers. CL)

Finishes:

- STANDARD:
 - nickel-plated sand brass (fin. 12)
- ON REQUEST:
 - polished brass (fin. 66)

Standards:

- Compliant with EN 1303:05

Attack Resistance: grade 2

Key Related Security: grade 6

Durability: grade 6


Certifications:

- ICIM EN 1303:05 16010C62 - Europe
- SKG**
- Gost - Russia

Patents:

- Key: PCT/EP99/07611
- Snap system: Europe EP1583878 Russia RU2361989
- BKP: PCT/WO2007/074133A1
- ALI is protected by a Shape trademark B020040000802

Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim	Hand	Fin.




• Double cylinders

30 / 30	59,0	29,5	29,5	12	1 00770 00 0	0,272	1	1	OH350	07	0	12
30 / 35	64,0	29,5	34,5	12	1 00770 00 0	0,260	1	1	OH350	26	0	12
30 / 37	66,0	29,5	36,5	12	1 00770 00 0	0,250	1	1	OH350	76	0	12
33 / 33	65,0	32,5	32,5	12	1 00770 00 0	0,260	1	1	OH350	10	0	12
40 / 30	69,0	39,5	29,5	12	1 00770 00 0	0,275	1	1	OH350	12	0	12
35 / 35	69,0	34,5	34,5	12	1 00770 00 0	0,270	1	1	OH350	13	0	12
30 / 45	74,0	29,5	44,5	12	1 00770 00 0	0,290	1	1	OH350	27	0	12
35 / 40	74,0	34,5	39,5	12	1 00770 00 0	0,285	1	1	OH350	28	0	12
30 / 50	79,0	29,5	49,5	12	1 00770 00 0	0,305	1	1	OH350	17	0	12
35 / 45	79,0	34,5	44,5	12	1 00770 00 0	0,300	1	1	OH350	19	0	12
40 / 40	79,0	39,5	39,5	12	1 00770 00 0	0,330	1	1	OH350	18	0	12
30 / 55	84,0	29,5	54,5	12	1 00770 00 0	0,350	1	1	OH350	33	0	12
35 / 50	84,0	34,5	49,5	12	1 00770 00 0	0,350	1	1	OH350	31	0	12
40 / 45	84,0	39,5	44,5	12	1 00770 00 0	0,315	1	1	OH350	30	0	12
30 / 60	89,0	29,5	59,5	12	1 00770 00 0	0,335	1	1	OH350	20	0	12
35 / 55	89,0	34,5	54,5	12	1 00770 00 0	0,330	1	1	OH350	32	0	12
40 / 50	89,0	39,5	49,5	12	1 00770 00 0	0,330	1	1	OH350	21	0	12
45 / 45	89,0	44,5	44,5	12	1 00770 00 0	0,330	1	1	OH350	29	0	12
40 / 55	94,0	39,5	54,5	12	1 00770 00 0	0,345	1	1	OH350	42	0	12
45 / 50	94,0	44,5	49,5	12	1 00770 00 0	0,370	1	1	OH350	39	0	12
30 / 70	99,0	29,5	69,5	12	1 00770 00 0	0,380	1	1	OH350	24	0	12
35 / 65	99,0	34,5	64,5	12	1 00770 00 0	0,365	1	1	OH350	22	0	12
40 / 60	99,0	39,5	59,5	12	1 00770 00 0	0,365	1	1	OH350	25	0	12
45 / 55	99,0	44,5	54,5	12	1 00770 00 0	0,365	1	1	OH350	43	0	12
50 / 50	99,0	49,5	49,5	12	1 00770 00 0	0,380	1	1	OH350	23	0	12
30 / 80	109,0	29,5	79,5	12	1 00770 00 0	0,395	1	1	OH350	37	0	12
40 / 70	109,0	39,5	69,5	12	1 00770 00 0	0,390	1	1	OH350	35	0	12
50 / 60	109,0	49,5	59,5	12	1 00770 00 0	0,390	1	1	OH350	36	0	12
55 / 55	109,0	54,5	54,5	12	1 00770 00 0	0,390	1	1	OH350	70	0	12
40 / 80	119,0	39,5	79,5	12	1 00770 00 0	0,420	1	1	OH350	60	0	12


TO BE DISCONTINUED

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers. Spec.



• Clutching systems double cylinders

30 / 30	59,0	29,5	29,5	12	1	00770 00 0	0,250	1	1	OH3S1	07	0	12
30 / 35	64,0	29,5	34,5	12	1	00770 00 0	0,280	1	1	OH3S1	26	0	12
40 / 30	69,0	39,5	29,5	12	1	00770 00 0	0,302	1	1	OH3S1	12	0	12
35 / 35	69,0	34,5	34,5	12	1	00770 00 0	0,270	1	1	OH3S1	13	0	12
30 / 45	74,0	29,5	44,5	12	1	00770 00 0	0,250	1	1	OH3S1	27	0	12
35 / 40	74,0	34,5	39,5	12	1	00770 00 0	0,310	1	1	OH3S1	28	0	12
30 / 50	79,0	29,5	49,5	12	1	00770 00 0	0,305	1	1	OH3S1	17	0	12
35 / 45	79,0	34,5	44,5	12	1	00770 00 0	0,330	1	1	OH3S1	19	0	12
40 / 40	79,0	39,5	39,5	12	1	00770 00 0	0,300	1	1	OH3S1	18	0	12
40 / 45	84,0	39,5	44,5	12	1	00770 00 0	0,344	1	1	OH3S1	30	0	12
35 / 50	84,0	34,5	49,5	12	1	00770 00 0	0,250	1	1	OH3S1	31	0	12
40 / 50	89,0	39,5	49,5	12	1	00770 00 0	0,330	1	1	OH3S1	21	0	12
30 / 60	89,0	29,5	59,5	12	1	00770 00 0	0,250	1	1	OH3S1	20	0	12
45 / 45	89,0	44,5	44,5	12	1	00770 00 0	0,350	1	1	OH3S1	29	0	12
35 / 55	89,0	34,5	54,5	12	1	00770 00 0	0,330	1	1	OH3S1	35	0	12
35 / 60	94,0	34,5	59,5	12	1	00770 00 0	0,330	1	1	OH3S1	38	0	12
35 / 65	99,0	34,5	64,5	12	1	00770 00 0	0,390	1	1	OH3S1	22	0	12
30 / 70	99,0	29,5	69,5	12	1	00770 00 0	0,390	1	1	OH3S1	24	0	12
50 / 50	99,0	49,5	49,5	12	1	00770 00 0	0,390	1	1	OH3S1	23	0	12
40 / 60	99,0	39,5	59,5	12	1	00770 00 0	0,390	1	1	OH3S1	25	0	12
40 / 70	109,0	39,5	69,5	12	1	00770 00 0	0,418	1	1	OH3S1	35	0	12
30 / 80	109,0	29,5	79,5	12	1	00770 00 0	0,418	1	1	OH3S1	37	0	12
50 / 60	109,0	49,5	59,5	12	1	00770 00 0	0,418	1	1	OH3S1	36	0	12
50 / 80	129,0	49,5	79,5	12	1	00770 00 0	0,250	1	1	OH3S1	55	0	12




• Double cylinders with thumb turn shaft

• ON REQUEST:
knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	12	1	00770 00 0	0,265	1	1	OH3S2	07	0	12
33 / 33	65,0	29,5	32,5	12	1	00770 00 0	0,275	1	1	OH3S2	10	0	12
30 / 35	64,0	29,5	34,5	12	1	00770 00 0	0,275	1	1	OH3S2	26	0	12
35 / 30	69,0	39,5	29,5	12	1	00770 00 0	0,275	1	1	OH3S2	81	0	12
30 / 40	69,0	29,5	39,5	12	1	00770 00 0	0,288	1	1	OH3S2	82	0	12
40 / 30	69,0	39,5	29,5	12	1	00770 00 0	0,288	1	1	OH3S2	12	0	12
35 / 35	69,0	34,5	34,5	12	1	00770 00 0	0,288	1	1	OH3S2	13	0	12
35 / 40	74,0	34,5	39,5	12	1	00770 00 0	0,295	1	1	OH3S2	28	0	12
30 / 45	74,0	29,5	44,5	12	1	00770 00 0	0,295	1	1	OH3S2	27	0	12
40 / 35	74,0	39,5	34,5	12	1	00770 00 0	0,295	1	1	OH3S2	83	0	12
45 / 30	74,0	44,5	29,5	12	1	00770 00 0	0,295	1	1	OH3S2	91	0	12
30 / 50	79,0	29,5	49,5	12	1	00770 00 0	0,315	1	1	OH3S2	17	0	12
35 / 45	79,0	34,5	44,5	12	1	00770 00 0	0,315	1	1	OH3S2	19	0	12
40 / 40	79,0	39,5	39,5	12	1	00770 00 0	0,315	1	1	OH3S2	18	0	12
45 / 35	79,0	44,5	34,5	12	1	00770 00 0	0,315	1	1	OH3S2	85	0	12
50 / 30	79,0	49,5	29,5	12	1	00770 00 0	0,315	1	1	OH3S2	90	0	12
40 / 45	84,0	39,5	44,5	12	1	00770 00 0	0,325	1	1	OH3S2	30	0	12
35 / 50	84,0	34,5	49,5	12	1	00770 00 0	0,325	1	1	OH3S2	31	0	12
30 / 55	84,0	29,5	54,5	12	1	00770 00 0	0,325	1	1	OH3S2	33	0	12
45 / 40	84,0	44,5	39,5	12	1	00770 00 0	0,325	1	1	OH3S2	84	0	12
50 / 35	84,0	49,5	34,5	12	1	00770 00 0	0,325	1	1	OH3S2	94	0	12
30 / 60	89,0	29,5	59,5	12	1	00770 00 0	0,374	1	1	OH3S2	20	0	12
40 / 50	89,0	39,5	49,5	12	1	00770 00 0	0,340	1	1	OH3S2	21	0	12
45 / 45	89,0	44,5	44,5	12	1	00770 00 0	0,378	1	1	OH3S2	29	0	12
40 / 55	94,0	39,5	54,5	12	1	00770 00 0	0,345	1	1	OH3S2	42	0	12
55 / 40	94,0	54,5	39,5	12	1	00770 00 0	0,265	1	1	OH3S2	98	0	12
45 / 55	99,0	44,5	54,5	12	1	00770 00 0	0,360	1	1	OH3S2	43	0	12
55 / 45	99,0	54,5	44,5	12	1	00770 00 0	0,265	1	1	OH3S2	99	0	12
50 / 50	99,0	49,5	49,5	12	1	00770 00 0	0,360	1	1	OH3S2	23	0	12
55 / 50	104,0	54,5	49,5	12	1	00770 00 0	0,418	1	1	OH3S2	64	0	12
60 / 50	109,0	59,5	49,5	12	1	00770 00 0	0,380	1	1	OH3S2	89	0	12
55 / 60	114,0	54,5	59,5	12	1	00770 00 0	0,390	1	1	OH3S2	71	0	12
60 / 60	119,0	59,5	59,5	12	1	00770 00 0	0,405	1	1	OH3S2	40	0	12
65 / 55	119,0	64,5	54,5	12	1	00770 00 0	0,405	1	1	OH3S2	86	0	12

TO BE DISCONTINUED


Type	Description	Comm. dim.				Key item	Unit weight Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.



- Double cylinders with thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST:
knobs series 06353, 06355,
06356, 06357

30 / 30	59,0	29,5	29,5	12	1 00770 00 0	0,265	1	1	0H3S7 07 0 12
35 / 30	64,0	34,5	29,5	12	1 00770 00 0	0,275	1	1	0H3S7 81 0 12
40 / 30	69,0	39,5	29,5	12	1 00770 00 0	0,288	1	1	0H3S7 12 0 12
45 / 30	74,0	44,5	29,5	12	1 00770 00 0	0,295	1	1	0H3S7 91 0 12
50 / 30	79,0	49,5	29,5	12	1 00770 00 0	0,310	1	1	0H3S7 90 0 12
60 / 30	89,0	59,5	29,5	12	1 00770 00 0	0,310	1	1	0H3S7 87 0 12
70 / 30	99,0	69,5	29,5	12	1 00770 00 0	0,370	1	1	0H3S7 88 0 12

TO BE DISCONTINUED



4.7

CISA RATING



ALI

Technical features:

- BKP (Bumping Resistant) registered patented
- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa or Cisa Solution Partner
- brass body
- brass plugs
- pins: in hardened steel
- drivers: in hardened steel, cylindrical and mushroom-like for anti-picking function
- phosphor bronze and steel springs
- self-lubricating sintered steel projecting DIN cam
- KEY:
 - flat reversible keys
 - in nickel silver with incorporated mobile element

- numbered on key bow
- long key for protective roses compatibility

Supplied as standard:

- 3 keys
- SECURITY CARD
- Fixing screw
- Operating and Maintenance Instructions.

On request:

- Cylinder with ALI key (pers. CL)

Finishes:

- STANDARD: nickel-plated brass (fin. 12)
- ON REQUEST: polished brass (fin. 66)

Standards:

- Compliant with EN 1303:05
- Attack Resistance: grade 2
- Key Related Security: grade 6
- Durability: grade 6

Certifications:


- ICIM EN 1303:05 16010C62 - Europe
- SKG**
- Gost - Russia

Patents:

- Key: PCT/EP99/07611
- Europe EP1583878
- Russia RU2361989
- BKP: PCT/WO2007/074163A1
- ALI is protected by a shape trademark BO2004C000080L

AP3

Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.



- Single cylinder with adjustable cam in 8 position

30 / 10	39,5 29,5 10,0 12	1 00770 00 0	0,226	1	1	OH314	02	0	12
35 / 10	44,5 34,5 10,0 12	1 00770 00 0	0,195	1	1	OH314	07	0	12
40 / 10	49,5 39,5 10,0 12	1 00770 00 0	0,215	1	1	OH314	03	0	12
45 / 10	54,5 44,5 10,0 12	1 00770 00 0	0,235	1	1	OH314	08	0	12
50 / 10	59,5 49,5 10,0 12	1 00770 00 0	0,245	1	1	OH314	04	0	12
60 / 10	69,5 59,5 10,0 12	1 00770 00 0	0,275	1	1	OH314	05	0	12
65 / 10	74,5 64,5 10,0 12	1 00770 00 0	0,290	1	1	OH314	21	0	12
70 / 10	79,5 69,5 10,0 12	1 00770 00 0	0,305	1	1	OH314	06	0	12
80 / 10	89,5 79,5 10,0 12	1 00770 00 0	0,330	1	1	OH314	20	0	12
95 / 10	104,5 94,5 10,0 12	1 00770 00 0	0,380	1	1	OH314	13	0	12

TO BE DISCONTINUED



ALI

AP3

Technical features:

- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa or Cisa Solution Partner
- Brass body
- Brass plug
- Pins: in hardened steel
- Drivers: in hardened steel
- Phosphor bronze springs
- KEY:
 - flat reversible keys, with incorporated mobile element
 - in nickel silver
 - numbered on key bow
 - long key for protective roses compatibility

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Fixing plates
- Operating and Maintenance Instructions.

On request:

- Cylinder with ALI key (pers. CL)

Finishes:




- STANDARD: nickel-plated brass (fin. 12)
- ON REQUEST: polished brass (fin. 66)

Patents:

- PCT/EP99/07611
- ALI is protected by a Shape trademark B02004C0000802

Type	Description	For locks series	L	Pins	Key item	Kg	Pieces	ITEM				
								Type	Dim. Hand	Fin.	Pers. Spec.	
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	12	1	1 00770 00 0	0,204	1	1	0H510	00	0	12
	• Rim cylinder with nickel-plated tear and drill resistant rose		12	1	1 00770 00 0	0,325	1	1	0H510	10	0	12
	• Round cylinder • For further length see item: 07165	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	50,0	12	1 00770 00 0	0,215	1	1	0H210	50	0	12
	• Cylinder set with round external cylinder	1A631, 1A721, 1A731	55,0	5	1 00770 00 0	0,295	6	1	0H150	00	0	12
	• Pair of cylinders	50120, 50125, 50160, 50170, 50210, 50220	12	1	1 00770 00 0	0,267	1	1	0H112	00	0	12
		11630	12	1	1 00770 00 0	0,295	1	1	0H114	00	0	12

TO BE DISCONTINUED

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM								
			L	Pins			kg	kg	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • Pair of cylinders, tubular outside 	50121, 50126, 50141, 50161, 50171, 50211, 50421, 50461, 50471, 50521, 50561, 50571	12	1	00770 00 0	0,295	1	1	0H116	00 0	12				
		11631, 11731, 11931	12	1	00770 00 0	0,295	1	1	0H120	00 0	12				
	<ul style="list-style-type: none"> • Pair of cylinders 	11670	12	1	00770 00 0	0,295	1	1	0H116	00 0	12				
	<ul style="list-style-type: none"> • Pair of cylinders, tubular outside 	11721, 11921	50,0	12	1 00770 00 0	0,295	1	1	0H149	00 0	12				
		11671, 11761, 11771	50,0	12	1 00770 00 0	0,253	1	1	0H155	00 0	12				

TO BE DISCONTINUED



ALI

AP3

Technical features:

- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa or Cisa Solution Partner
- brass body
- brass plug
- pins: in hardened steel, in a special anti-picking shape
- drivers: in hardened steel, cylindrical and mushroom-like for anti-picking function
- phosphor bronze springs
- KEY:
 - flat reversible keys, with incorporated mobile element
 - in nickel silver
 - numbered on key bow
 - long key for protective roses compatibility

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Fixing plates
- Operating and Maintenance Instructions.

On request:

- Cylinder with ALI key (pers. CL)

Finishes:

- Nickel-plated brass (Fin. 12)

Patents:

- PCT/EP99/07611
- ALI is protected by a Shape trademark B02004C0000802

Type	Description	Door thickness	Key item	Unit weight	Pieces	ITEM					
						Type	Dim	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Cylinder for steel padlocks • 2 keys • Pickled brass body • Complete with plate 	12	1 00770 00 0	0,117	1	1	OH610	00	0		
	<ul style="list-style-type: none"> • Cylinder for external control item 1.07078.28.0 	12	1 00770 00 0	0,117	1	1	OH610	10	0		
	<ul style="list-style-type: none"> • Cylinder for external control item 1.07078.29.0 	12	1 00770 00 0	0,117	1	1	OH610	11	0		
	<ul style="list-style-type: none"> • Cylinder for push-to-open Meroni locks 	12	1 00770 00 0	0,117	1	1	OH610	12	0	12	
	<ul style="list-style-type: none"> • Vertical key extraction • Deadbolt item 1.06414.20.0 or item 1.06414.30.0 (to order separately) 	17	12 1 00770 00 0	0,150	1	1	OH410	00	0	12	
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) 	17	12 1 00770 00 0	0,150	1	1	OH415	01	0	12	
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) 	17	12 1 00770 00 0	0,150	1	1	OH415	03	0	12	

TO BE DISCONTINUED



ALI

Technical features:

- CISA patented system: key with mobile element
- Security Card: duplication only authorized by CISA or a CISA Solution Partner
- BKP bumping resistant (patented system)
- Brass body with segment pack across the cylinder length
- Brass plugs
- Carbonitrided steel pins
- Cylindrical and mushroom-shaped steel pin drivers with special anti-picking shaping
- Phosphorous bronze and steel springs
- Self-lubricating DIN sintered steel cam

Keys:

- reversible flat keys
- nickel-silver key with mobile element
- long neck, compatible with protective roses
- numerical coding on the head

Supplied as standard:

- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance Instructions

On request:

- Cylinders with ALI keys (car. CL)

Finishes:

- STANDARD: Sandblasted nickel-plated brass (fin. 12)
- ON REQUEST: Polished brass (fin. 66)





Standards:

- Compliant with the EN 1303:2005 standard
- Durability: class 6 (100,000 cycles)
- Key related security: class 6
- Attack resistance: class 2
- SKG**

Patents:

- PCT/EP99/07611
- Snap Resistant, European patent EP 1 583 876
- ALI is protected by a Shape trademark B02004C000802
- BKP PCT/WO 2007/074163 A1

AP3 S Modulo


Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pars.	Spec.
 <ul style="list-style-type: none"> • Pair of modules for double cylinders with clutch mechanism 	30 / 30	12	1	00770 00 0	0,272	1	1	0H3M1	07	0	12		
	30 / 35	12	1	00770 00 0	0,272	1	1	0H3M1	26	0	12		
	35 / 35	12	1	00770 00 0	0,272	1	1	0H3M1	13	0	12		
 <ul style="list-style-type: none"> • Pair of modules for thumb turn cylinders 	30 / 30	12	1	00770 00 0	0,272	1	1	0H3M2	07	0	12		
	30 / 35	12	1	00770 00 0	0,272	1	1	0H3M2	26	0	12		
	35 / 30	12	1	00770 00 0	0,272	1	1	0H3M2	81	0	12		
	35 / 35	12	1	00770 00 0	0,272	1	1	0H3M2	13	0	12		
 <ul style="list-style-type: none"> • Pair of modules for thumb turn cylinders with adjustable shaft 	30 / 30	12	1	00770 00 0	0,272	1	1	0H3M7	07	0	12		
	35 / 30	12	1	00770 00 0	0,272	1	1	0H3M7	81	0	12		
 <ul style="list-style-type: none"> • Single cylinder module 	30	12	1	00770 00 0	0,272	1	1	0H3M4	02	0	12		
	35	12	1	00770 00 0	0,272	1	1	0H3M4	07	0	12		

TO BE DISCONTINUED

Type	Description	Comm. dim.		Key item	Kg	Pieces	ITEM				
		A / B	L				Pin	Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Module for nickel-plated thumb turn cylinder (fin 12) 	30			0,272	* 5	1	07580	45	0	
		35			0,272	* 5	1	07580	46	0	
	<ul style="list-style-type: none"> Extended bolt unit on key side for double cylinders or thumb turn cylinders (patented) 	10,0			0,305	* 20	1	07580	01	0	
		20,0			0,305	* 20	1	07580	02	0	
		30,0			0,305	* 10	1	07580	03	0	
	<ul style="list-style-type: none"> Extended bolt unit on knob side for double cylinders or thumb turn cylinders (patented) 	10,0			0,305	* 20	1	07580	06	0	
		20,0			0,305	* 20	1	07580	07	0	
		30,0			0,305	* 10	1	07580	08	0	
	<ul style="list-style-type: none"> Extended bolt unit fixing screw 	10,0			0,305	* 100	1	07580	11	0	
		20,0			0,305	* 100	1	07580	12	0	
		30,0			0,305	* 100	1	07580	13	0	
		40,0			0,305	* 50	1	07580	14	0	
		50,0			0,305	* 50	1	07580	15	0	
		60,0			0,305	* 20	1	07580	16	0	
		70,0			0,305	* 20	1	07580	17	0	
	<ul style="list-style-type: none"> Follower for cylinders with clutch mechanism Follower for thumb turn cylinders 				0,305	* 100	1	07580	30	0	
					0,305	* 100	1	07580	40	0	
	<ul style="list-style-type: none"> Follower kit for single cylinder 				0,050	* 5	1	07580	60	0	
	<ul style="list-style-type: none"> Coupling unit for double cylinders with clutch mechanism 	30 / 30			0,305	* 50	1	07580	31	0	
		30 / 35			0,305	* 50	1	07580	32	0	
		35 / 35			0,305	* 50	1	07580	33	0	
	<ul style="list-style-type: none"> Coupling unit for thumb turn cylinders 	30 / 30			0,305	* 50	1	07580	41	0	
		35 / 30			0,305	* 50	1	07580	42	0	
	<ul style="list-style-type: none"> Key side extended bolt 35 mm 				0,305	* 100	1	07580	35	0	
	<ul style="list-style-type: none"> SNAP RESISTANT unit fixing pin 				0,305	* 500	1	07580	20	0	


* Amount corresponding to a single code ordered

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




• Pre-assembled SNAP RESISTANT unit

30 / 30	0,305	* 10	1	07581	01	0
30 / 35	0,305	* 10	1	07581	02	0
30 / 40	0,305	* 10	1	07581	03	0
30 / 45	0,305	* 10	1	07581	04	0
30 / 50	0,305	* 10	1	07581	05	0
30 / 55	0,305	* 10	1	07581	06	0
30 / 60	0,305	* 5	1	07581	07	0
30 / 65	0,305	* 5	1	07581	71	0
30 / 70	0,305	* 5	1	07581	08	0
30 / 75	0,305	* 2	1	07581	72	0
30 / 80	0,305	* 2	1	07581	09	0
35 / 35	0,305	* 10	1	07581	10	0
35 / 40	0,305	* 10	1	07581	11	0
35 / 45	0,305	* 10	1	07581	12	0
35 / 50	0,305	* 10	1	07581	13	0
35 / 55	0,305	* 5	1	07581	14	0
35 / 60	0,305	* 5	1	07581	15	0
35 / 65	0,305	* 5	1	07581	16	0
35 / 70	0,305	* 2	1	07581	17	0
40 / 40	0,305	* 10	1	07581	20	0
40 / 45	0,305	* 10	1	07581	21	0
40 / 50	0,305	* 5	1	07581	22	0
40 / 55	0,305	* 5	1	07581	23	0
40 / 60	0,305	* 5	1	07581	24	0
40 / 70	0,305	* 2	1	07581	25	0
40 / 80	0,305	* 2	1	07581	26	0
45 / 45	0,305	* 5	1	07581	30	0
45 / 50	0,305	* 5	1	07581	31	0
45 / 55	0,305	* 5	1	07581	32	0
45 / 60	0,305	* 2	1	07581	33	0
50 / 50	0,305	* 5	1	07581	40	0
50 / 55	0,305	* 2	1	07581	41	0
50 / 60	0,305	* 2	1	07581	42	0
50 / 80	0,305	* 2	1	07581	43	0
55 / 55	0,305	* 2	1	07581	50	0
55 / 60	0,305	* 2	1	07581	51	0
55 / 65	0,305	* 2	1	07581	52	0
60 / 60	0,305	* 2	1	07581	60	0



• Single cylinder connector

30 / 10	0,305	* 5	1	07582	10	0
35 / 10	0,305	* 5	1	07582	11	0
40 / 10	0,305	* 5	1	07582	12	0
45 / 10	0,305	* 5	1	07582	13	0
50 / 10	0,305	* 5	1	07582	14	0
55 / 10	0,305	* 2	1	07582	15	0
60 / 10	0,305	* 2	1	07582	16	0
65 / 10	0,305	* 2	1	07582	17	0
70 / 10	0,305	* 2	1	07582	18	0
80 / 10	0,305	* 2	1	07582	20	0
95 / 10	0,305	* 2	1	07582	23	0



• Assembly kit for AP3 S Modulo cylinders

3,000 1 1 07550 11 0

TO BE DISCONTINUED

* Amount corresponding to a single code ordered



Technical features:

- **CYLINDER**
 - Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying
 - Hardened steel pins and drivers.
 - Stainless steel springs
- Brass casing with snap resistant two-material core
- Brass plug.
- Cam: DIN, self-lubricating sintered steel
- Clutch-type cam for emergency operation.
- **KEY:**
 - Non-handed, easier to use
 - Patented controlled duplication
 - With built-in mobile element.

- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.
- Fixing screw.

Finishes:

- Standard: nickel-plated sand brass (fin. 12).
- On request: polished brass (fin. 66).

Standards:

- Compliant with the European Standard EN 1303: 2005.
- Attack resistance : 2

- Key Related Security : 6
- Durability : 6
- For armored door classes 4 to 6 according to the draft Standard EN 1627

Certifications:


- ICIM certified: EN 1303:05 16010C62 - Europe.
- Gost certified - Russia.
- SKG**

Patents:

- Key: EP1728944
- Snap Resistant - Europe EP1583878 - Russia RU2361989
- BKP: PCT/WO2007/074163A1
- ALI is protected by a Shape trademark B02004C000802

RS3 S


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

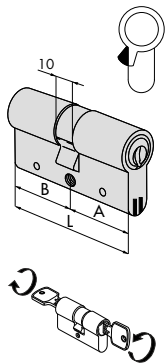

- Clutch-type SNAP RESISTANT double cylinder


30 / 30	60,0	30,0	30,0	15	1	00800	00	0	00CL	0,260	1	1	0L3S1	07	0	12	CL
30 / 35	65,0	30,0	35,0	15	1	00800	00	0	00CL	0,270	1	1	0L3S1	26	0	12	CL
35 / 35	70,0	35,0	35,0	15	1	00800	00	0	00CL	0,279	1	1	0L3S1	13	0	12	CL
40 / 30	70,0	40,0	30,0	15	1	00800	00	0	00CL	0,279	1	1	0L3S1	12	0	12	CL
35 / 40	75,0	35,0	40,0	15	1	00800	00	0	00CL	0,300	1	1	0L3S1	28	0	12	CL
30 / 45	75,0	30,0	45,0	15	1	00800	00	0	00CL	0,300	1	1	0L3S1	27	0	12	CL
35 / 45	80,0	35,0	45,0	15	1	00800	00	0	00CL	0,315	1	1	0L3S1	19	0	12	CL
40 / 40	80,0	40,0	40,0	15	1	00800	00	0	00CL	0,315	1	1	0L3S1	18	0	12	CL
30 / 50	80,0	30,0	50,0	15	1	00800	00	0	00CL	0,315	1	1	0L3S1	17	0	12	CL
35 / 50	85,0	35,0	50,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	31	0	12	CL
40 / 45	85,0	40,0	45,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	30	0	12	CL
30 / 55	85,0	30,0	55,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	33	0	12	CL
35 / 55	90,0	35,0	55,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	32	0	12	CL
40 / 50	90,0	40,0	50,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	21	0	12	CL
45 / 45	90,0	45,0	45,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	29	0	12	CL
30 / 60	90,0	30,0	60,0	15	1	00800	00	0	00CL	0,330	1	1	0L3S1	20	0	12	CL
40 / 55	95,0	40,0	55,0	15	1	00800	00	0	00CL	0,350	1	1	0L3S1	42	0	12	CL
35 / 60	95,0	35,0	60,0	15	1	00800	00	0	00CL	0,350	1	1	0L3S1	38	0	12	CL
45 / 50	95,0	45,0	50,0	15	1	00800	00	0	00CL	0,350	1	1	0L3S1	39	0	12	CL
30 / 65	100,0	30,0	65,0	15	1	00800	00	0	00CL	0,370	1	1	0L3S1	22	0	12	CL
40 / 60	100,0	40,0	60,0	15	1	00800	00	0	00CL	0,370	1	1	0L3S1	25	0	12	CL
45 / 55	100,0	45,0	55,0	15	1	00800	00	0	00CL	0,370	1	1	0L3S1	43	0	12	CL
50 / 50	100,0	50,0	50,0	15	1	00800	00	0	00CL	0,370	1	1	0L3S1	23	0	12	CL
30 / 70	100,0	30,0	70,0	15	1	00800	00	0	00CL	0,370	1	1	0L3S1	24	0	12	CL
40 / 70	110,0	40,0	70,0	15	1	00800	00	0	00CL	0,400	1	1	0L3S1	35	0	12	CL
50 / 60	110,0	50,0	60,0	15	1	00800	00	0	00CL	0,400	1	1	0L3S1	36	0	12	CL
55 / 55	110,0	55,0	55,0	15	1	00800	00	0	00CL	0,400	1	1	0L3S1	70	0	12	CL
30 / 80	110,0	30,0	80,0	15	1	00800	00	0	00CL	0,400	1	1	0L3S1	37	0	12	CL
40 / 80	120,0	40,0	80,0	15	1	00800	00	0	00CL	0,420	1	1	0L3S1	60	0	12	CL
50 / 80	130,0	50,0	80,0	15	1	00800	00	0	00CL	0,440	1	1	0L3S1	55	0	12	CL

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Phs				Type	Dim.	Hand	Fin.	Pers.




- Single cylinder with cam adjustable to 8 positions

30 / 10	40,0	30,0	10,0	15	1 00800 00 0 00CL	0,200	1	1	OL314	02 0	12	CL
35 / 10	45,0	35,0	10,0	15	1 00800 00 0 00CL	0,210	1	1	OL314	07 0	12	CL
40 / 10	50,0	40,0	10,0	15	1 00800 00 0 00CL	0,220	1	1	OL314	03 0	12	CL
45 / 10	55,0	45,0	10,0	15	1 00800 00 0 00CL	0,230	1	1	OL314	08 0	12	CL
50 / 10	60,0	50,0	10,0	15	1 00800 00 0 00CL	0,240	1	1	OL314	04 0	12	CL
60 / 10	70,0	60,0	10,0	15	1 00800 00 0 00CL	0,260	1	1	OL314	05 0	12	CL
65 / 10	75,0	65,0	10,0	15	1 00800 00 0 00CL	0,270	1	1	OL314	21 0	12	CL
70 / 10	80,0	70,0	10,0	15	1 00800 00 0 00CL	0,280	1	1	OL314	06 0	12	CL
80 / 10	90,0	80,0	10,0	15	1 00800 00 0 00CL	0,300	1	1	OL314	20 0	12	CL
95 / 10	105,0	95,0	10,0	15	1 00800 00 0 00CL	0,330	1	1	OL314	13 0	12	CL



- Double SNAP RESISTANT cylinder pre-set for thumb turn installation
- ON REQUEST: Thumb turns series 06353, 06355, 06356, 06357

30 / 30	60,0	30,0	30,0	15	1 00800 00 0 00CL	0,270	1	1	OL352	07 0	12	CL
30 / 35	65,0	30,0	35,0	15	1 00800 00 0 00CL	0,280	1	1	OL352	26 0	12	CL
35 / 30	65,0	35,0	30,0	15	1 00800 00 0 00CL	0,280	1	1	OL352	81 0	12	CL
40 / 30	70,0	40,0	30,0	15	1 00800 00 0 00CL	0,292	1	1	OL352	12 0	12	CL
35 / 35	70,0	35,0	35,0	15	1 00800 00 0 00CL	0,292	1	1	OL352	13 0	12	CL
40 / 35	75,0	40,0	35,0	15	1 00800 00 0 00CL	0,302	1	1	OL352	83 0	12	CL
30 / 45	75,0	30,0	45,0	15	1 00800 00 0 00CL	0,302	1	1	OL352	27 0	12	CL
35 / 40	75,0	35,0	40,0	15	1 00800 00 0 00CL	0,302	1	1	OL352	28 0	12	CL
30 / 50	80,0	30,0	50,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	17 0	12	CL
35 / 45	80,0	35,0	45,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	19 0	12	CL
40 / 40	80,0	40,0	40,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	18 0	12	CL
45 / 35	80,0	45,0	35,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	85 0	12	CL
40 / 45	85,0	40,0	45,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	30 0	12	CL
50 / 35	85,0	50,0	35,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	94 0	12	CL
45 / 40	85,0	45,0	40,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	84 0	12	CL
30 / 60	85,0	45,0	40,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	20 0	12	CL
40 / 50	90,0	40,0	50,0	15	1 00800 00 0 00CL	0,332	1	1	OL352	21 0	12	CL
45 / 45	90,0	45,0	45,0	15	1 00800 00 0 00CL	0,332	1	1	OL352	29 0	12	CL
40 / 55	95,0	40,0	55,0	15	1 00800 00 0 00CL	0,342	1	1	OL352	42 0	12	CL
55 / 40	95,0	55,0	40,0	15	1 00800 00 0 00CL	0,342	1	1	OL352	98 0	12	CL
50 / 50	100,0	50,0	50,0	15	1 00800 00 0 00CL	0,352	1	1	OL352	23 0	12	CL
45 / 55	100,0	45,0	55,0	15	1 00800 00 0 00CL	0,352	1	1	OL352	43 0	12	CL
55 / 45	100,0	55,0	45,0	15	1 00800 00 0 00CL	0,352	1	1	OL352	99 0	12	CL
55 / 50	105,0	55,0	50,0	15	1 00800 00 0 00CL	0,362	1	1	OL352	64 0	12	CL
60 / 50	110,0	60,0	50,0	15	1 00800 00 0 00CL	0,372	1	1	OL352	89 0	12	CL
55 / 60	115,0	55,0	60,0	15	1 00800 00 0 00CL	0,382	1	1	OL352	71 0	12	CL
60 / 60	120,0	60,0	60,0	15	1 00800 00 0 00CL	0,392	1	1	OL352	40 0	12	CL
65 / 55	120,0	65,0	55,0	15	1 00800 00 0 00CL	0,392	1	1	OL352	86 0	12	CL



- Double SNAP RESISTANT cylinder pre-set for thumb turn installation
- Adjustable shaft
- To be installed with inside escutcheon item 1.06458.20.0
- ON REQUEST: Thumb turns series 06353, 06355, 06356, 06357

30 / 30	60,0	30,0	30,0	15	1 00800 00 0 00CL	0,306	1	1	OL357	07 0	12	CL
35 / 30	65,0	35,0	30,0	15	1 00800 00 0 00CL	0,320	1	1	OL357	81 0	12	CL
40 / 30	70,0	40,0	30,0	15	1 00800 00 0 00CL	0,340	1	1	OL357	12 0	12	CL
45 / 30	75,0	45,0	30,0	15	1 00800 00 0 00CL	0,305	1	1	OL357	91 0	12	CL
50 / 30	80,0	50,0	30,0	15	1 00800 00 0 00CL	0,370	1	1	OL357	90 0	12	CL
60 / 30	90,0	60,0	30,0	15	1 00800 00 0 00CL	0,400	1	1	OL357	87 0	12	CL
70 / 30	100,0	70,0	30,0	15	1 00800 00 0 00CL	0,420	1	1	OL357	88 0	12	CL



RS3 S

Technical features:

- CYLINDER
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
- Hardened steel pins.
- Hardened steel drivers.
- Stainless steel springs.
- Brass plug.
- Brass casing.
- KEY:
- Non-handed, easier to use.
- With built-in mobile element.
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).
- Patented controlled duplication

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.

Finishes:


- Standard: nickel-plated sand brass (fin. 12).
- On request: polished brass (fin. 66).

Patents:

- Key: valid until 2025
- Europe EP1728944
- Russia RU2008150925
- Ukraine UA200814736

Type	Description	For locks series	L	Pins	Key item	Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	15	1	00800 00 0 00CL	0,240	1	1	0L510	00	0	12	CL
	• Cylinder with anti-pulling, anti-drill nickel plated escutcheon		15	1	00800 00 0 00CL	0,325	1	1	0L510	10	0	12	CL
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	15	1	00800 00 0 00CL	0,215	1	1	0L210	50	0	12	CL
	• Pair of cylinders	50120, 50125, 50160, 50170, 50210, 50220	15	1	00800 00 0 00CL	0,267	1	1	0L112	00	0	12	CL
		11630	15	1	00800 00 0 00CL	0,267	1	1	0L114	00	0	12	CL
		11670	15	1	00800 00 0 00CL	0,267	1	1	0L156	00	0	12	CL
	• Pair of cylinders, tubular outside	11721, 11921	15	1	00800 00 0 00CL	0,295	1	1	0L149	00	0	12	CL
		11671, 11761, 11771	15	1	00800 00 0 00CL	0,253	1	1	0L155	00	0	12	CL


Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM				
			L	Pins			kg	kg	Type	Dim.	Hand



• Pair of cylinders, tubular outside

1A631, 1A721, 1A731

15 1 00800 00 0 00CL 0,295 1 1 0L150 00 0 12 CL



• Pair of cylinders, tubular outside

50121, 50126, 50141,
50161, 50171, 50421,
50461, 50471, 50521,
50561, 50571

15 1 00800 00 0 00CL 0,295 1 1 0L116 00 0 12 CL

11631, 11731, 11931

15 1 00800 00 0 00CL 0,295 1 1 0L120 00 0 12 CL



RS3 S

Technical features:

- CYLINDER
 - Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
 - Hardened steel pins.
 - Hardened steel drivers.
 - Stainless steel springs.
 - Brass casing with snap resistant two-material core
 - Brass plug.
- KEY:**
- Non-handed, easier to use.
 - With built-in mobile element.
 - Material: nickel silver alloy.
 - Numbered key head.
 - Key neck length: 16 mm (compatible with protective roses).
 - Patented controlled duplication

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.

Finishes:

- Standard: nickel-plated sand brass (fin. 12).

Patents:

- Key: valid until 2025
- Europe EP1728944
- Russia RU2008150925
- Ukraine UA200814736

Type	Description	For locks series	L	Pins	Key item	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Vertical key extraction • Deadbolt to choose from items 1.06414.25.0 and 1.06414.35.0 (specify in order) 		15	1	00800 00 0 00CL	0,150	1	1	0L410	00	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) 		15	1	00800 00 0 00CL	0,150	1	1	0L415	01	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) 		15	1	00800 00 0 00CL	0,150	1	1	0L415	03	0	12	CL
	<ul style="list-style-type: none"> • Plug for steel padlocks series 28000 • 2 keys • Pickled brass body • Complete with plate 		15	1	00800 00 0 00CL	0,240	1	1	0L610	00	0	00	CL
	<ul style="list-style-type: none"> • Cylinder for panic exit device external control item 1.07078.28.0 		15	1	00800 00 0 00CL	0,240	1	1	0L610	10	0	00	CL
	<ul style="list-style-type: none"> • Cylinder for panic exit device external control item 1.07078.29.0 		15	1	00800 00 0 00CL	0,240	1	1	0L610	11	0	00	CL



Technical features:

- **CYLINDER**
 - Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying
 - Hardened steel pins and drivers.
 - Stainless steel springs
- Brass casing with snap resistant two-material core
- Brass plug.
- Cam: DIN, self-lubricating sintered steel
- Clutch-type cam for emergency operation.
- **KEY:**
 - Non-handed, easier to use
 - Patented controlled duplication
 - With built-in mobile element.
 - Material: nickel silver alloy.

- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.
- Fixing screw.

Finishes:

- Standard: nickel-plated sand brass (fin. 12).
- On request: polished brass (fin. 66).

Standards:

- Compliant with the European Standard EN 1303: 2005.
- Attack resistance : 2


- Key Related Security : 6
- Durability : 6
- For armored door classes 4 to 6 according to the draft Standard EN 1627
- SKG***

Patents:

- Key: valid until 2025
- Europe EP1728944
- Russia RU2008150925
- Ukraine UA200814736
- Snap system:
 - Europe EP1583878
 - Russia RU2361989
- Extended bolts units: patented pending


RS3 S Modulo

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Pair of modules for double cylinders with clutch mechanism

30 / 30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M1 07 0 12 CL**




- Pair of modules for thumb turn cylinders

30 / 30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M2 07 0 12 CL**



- Pair of modules for thumb turn cylinders with adjustable shaft

30 / 30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M7 07 0 12 CL**






- Single cylinder module

30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M4 02 0 12 CL**

Type	Description	Comm. dim. A / B	L	Plms	Key item	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Module for nickel-plated thumb turn cylinder (fin 12)	30				0,272	* 5	1	07580	55	0		
	• Extended bolt unit on key side for double cylinders or thumb turn cylinders		5,0			0,305	* 20	1	07580	21	0		
			10,0			0,305	* 20	1	07580	22	0		
			20,0			0,305	* 10	1	07580	23	0		
			30,0			0,305	* 10	1	07580	24	0		
	• Extended bolt unit fixing screw		10,0			0,305	* 100	1	07580	11	0		
			20,0			0,305	* 100	1	07580	12	0		
			30,0			0,305	* 100	1	07580	13	0		
			40,0			0,305	* 50	1	07580	14	0		
			50,0			0,305	* 50	1	07580	15	0		
			60,0			0,305	* 20	1	07580	16	0		
			70,0			0,305	* 20	1	07580	17	0		
	• SNAP RESISTANT unit fixing pin					0,305	* 500	1	07580	20	0		
	• Follower					0,305	* 50	1	07580	50	0		
	• Follower kit for single cylinder					0,305	* 5	1	07580	70	0		
	• Coupling unit for double cylinders with clutch mechanism	30 / 30				0,305	* 25	1	07580	51	0		
		30 / 35				0,305	* 25	1	07580	52	0		
		35 / 35				0,305	* 25	1	07580	53	0		
		30 / 30				0,305	* 50	1	07580	61	0		
		30 / 35				0,305	* 25	1	07580	62	0		

* Amount corresponding to a single code ordered


Type	Description	Comm. dim. A / B	L	Plus	Key item	Kg	Pcs	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Pre-assembled SNAP RESISTANT unit 	30 / 30				0,305	* 10	1	07581	01	0		
		30 / 35				0,305	* 10	1	07581	02	0		
		30 / 40				0,305	* 10	1	07581	03	0		
		30 / 45				0,305	* 10	1	07581	04	0		
		30 / 50				0,305	* 10	1	07581	05	0		
		30 / 55				0,305	* 10	1	07581	06	0		
		30 / 60				0,305	* 5	1	07581	07	0		
		30 / 65				0,305	* 5	1	07581	71	0		
		30 / 70				0,305	* 5	1	07581	08	0		
		30 / 75				0,305	* 2	1	07581	72	0		
		30 / 80				0,305	* 2	1	07581	09	0		
		35 / 35				0,305	* 10	1	07581	10	0		
		35 / 40				0,305	* 10	1	07581	11	0		
		35 / 45				0,305	* 10	1	07581	12	0		
		35 / 50				0,305	* 10	1	07581	13	0		
		35 / 55				0,305	* 5	1	07581	14	0		
		35 / 60				0,305	* 5	1	07581	15	0		
		35 / 65				0,305	* 5	1	07581	16	0		
		35 / 70				0,305	* 2	1	07581	17	0		
		40 / 40				0,305	* 10	1	07581	20	0		
		40 / 45				0,305	* 10	1	07581	21	0		
		40 / 50				0,305	* 5	1	07581	22	0		
		40 / 55				0,305	* 5	1	07581	23	0		
		40 / 60				0,305	* 5	1	07581	24	0		
		40 / 70				0,305	* 2	1	07581	25	0		
		40 / 80				0,305	* 2	1	07581	26	0		
		45 / 45				0,305	* 5	1	07581	30	0		
		45 / 50				0,305	* 5	1	07581	31	0		
		45 / 55				0,305	* 5	1	07581	32	0		
		45 / 60				0,305	* 2	1	07581	33	0		
50 / 50				0,305	* 5	1	07581	40	0				
50 / 55				0,305	* 2	1	07581	41	0				
50 / 60				0,305	* 2	1	07581	42	0				
50 / 80				0,305	* 2	1	07581	43	0				
55 / 55				0,305	* 2	1	07581	50	0				
55 / 60				0,305	* 2	1	07581	51	0				
55 / 65				0,305	* 2	1	07581	52	0				
60 / 60				0,305	* 2	1	07581	60	0				
	<ul style="list-style-type: none"> • Single cylinder connector 	30 / 10				0,305	* 5	1	07582	10	0		
		35 / 10				0,305	* 5	1	07582	11	0		
		40 / 10				0,305	* 5	1	07582	12	0		
		45 / 10				0,305	* 5	1	07582	13	0		
		50 / 10				0,305	* 5	1	07582	14	0		
		55 / 10				0,305	* 2	1	07582	15	0		
		60 / 10				0,305	* 2	1	07582	16	0		
		65 / 10				0,305	* 2	1	07582	17	0		
		70 / 10				0,305	* 2	1	07582	18	0		
80 / 10				0,305	* 2	1	07582	20	0				
95 / 10				0,305	* 2	1	07582	23	0				
	<ul style="list-style-type: none"> • Assembly kit for RS3 S Modulo cylinders 					3,000	1	1	07550	12	0		

* Amount corresponding to a single code ordered


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	• Belt sanded brass rose to be used with European profile cylinders		0,009	100	1	06010	00	0	
	• Belt sanded brass rose to be used with European profile cylinders		0,008	100	1	06011	00	0	
	• Belt sanded brass rose to be used with European profile cylinders		0,009	100	1	06012	00	0	
	• Belt sanded brass rose to be used with rim cylinders (diameter 25 mm.)		0,010	100	1	06018	25	0	
	• Belt sanded brass rose to be used with oval cylinders	82000	0,007	100	1	06027	00	0	
	• Polished brass rose to be used with European profile cylinders		0,024	100	1	06043	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Peris.
	• Aluminium knob, black lacquered		0,038	6	1	06353	00	0	44
	• Aluminium knob, gold bronze anodized		0,040	6	1	06353	00	0	60
	• Aluminium knob, aluminium anodized		0,037	6	1	06353	00	0	62
	• Aluminium knob, dark brown bronze anodized		0,040	6	1	06353	00	0	64
	• Nickel-plated brass knob		0,051	6	1	06355	00	0	12
	• Laquered polished brass knob		0,060	6	1	06355	00	0	66
	• Nickel-plated brass knobs		0,062	6	1	06356	00	0	12
	• Laquered polished brass knob		0,062	6	1	06356	00	0	66
	• Nickel-plated brass knobs		0,062	6	1	06357	00	0	12
	• Laquered polished brass knob		0,062	6	1	06357	00	0	66
	• Zinc-plated steel cam	72210	0,012	12	1	06411	01	0	
			0,012	12	1	06411	02	0	
			0,014	12	1	06411	03	0	
			0,016	12	1	06411	04	0	
	• Zinc-plated steel cam	72210	0,014	12	1	06412	01	0	
			0,013	12	1	06412	02	0	
			0,016	12	1	06412	03	0	
			0,017	12	1	06412	04	0	
	• Zinc-plated steel cam	72215	0,013	12	1	06412	51	0	
	• Zinc-plated steel cam	72350	0,007	12	1	06413	01	0	
			0,008	12	1	06413	02	0	
			0,009	12	1	06413	03	0	
			0,010	12	1	06413	04	0	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Zinc-plated steel cam 	72350	0,008	12	1	06414	01	0		
					0,009	12	1	06414	02	0
					0,010	12	1	06414	03	0
					0,011	12	1	06414	04	0
	<ul style="list-style-type: none"> • Zinc plated steel cam 	0A410, 0H410, 0M410, 72250, 72275	0,019	12	1	06414	20	0		
	<ul style="list-style-type: none"> • Zinc plated steel cam 	0L410	0,018	12	1	06414	25	0		
	<ul style="list-style-type: none"> • Zinc plated steel cam 	0A410, 0H410, 0M410, 72250, 72275	0,010	12	1	06414	30	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 36 mm. • Total cylinder length 60 mm 	0A210, 0H210, 0L210, 0M210, 02552, 02572	0,030	12	1	07165	00	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 46 mm. • Total cylinder length 70 mm 	0A210, 0H210, 0L210, 0M210, 02552, 02572	0,038	12	1	07165	01	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 56 mm. • Total cylinder length 80 mm 	0A210, 0H210, 0L210, 0M210, 02552, 02572	0,045	12	1	07165	02	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 66 mm. • Total cylinder length 90 mm 	0A210, 0H210, 0L210, 0M210, 02552, 02572	0,050	12	1	07165	03	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 76 mm. • Total cylinder length 100 mm 	0A210, 0H210, 0L210, 0M210, 02552, 02572	0,052	12	1	07165	04	0		



02400

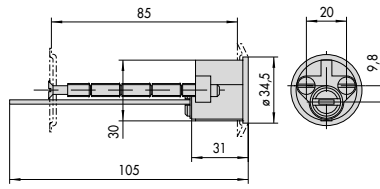


1.02520.00

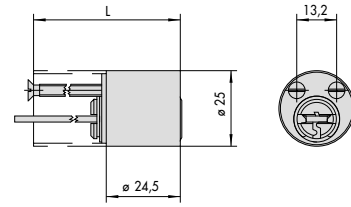


02552, 02572, 0A210, 0L210,
0E200, 0G200, 0H210, 0M210

1

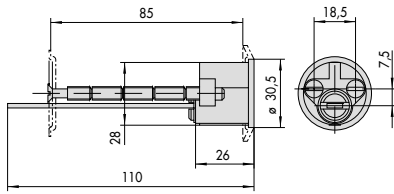


1.02500.00, 1.02502.00, 1.0A510.00, 1.0L510.00,
1.0E500.00, 1.0G500.00, 1.0H510.00, 1.0M510.00

4




	S	A	L
1.02544.10	5,5	13	10
1.02544.14	6,5	16	14
1.02544.15	5,5	18	15

7




1.02649.01, 1.02650.01, 1.0A610.00,
1.0L610.00, 1.02652.01, 1.0E600.00
1.0H610.00, 1.0M610.00

2

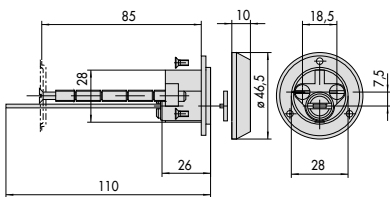


1.02500.11, 1.02502.10, 1.0A510.11
1.0L510.10, 1.0H510.10, 1.0M510.10

5



1.02550.25

8




08210


3

6


9



1.08220.02




08730, 08835, 0A314,
0E304, 0G304, 0E305,
0G305, 0H314, 0M314,
0L314

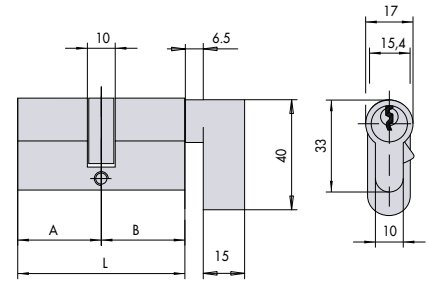


08453

10




08230

13

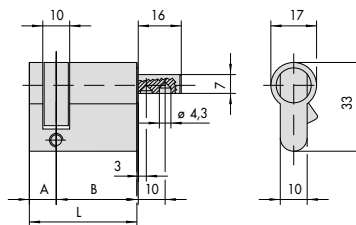


08359

16




08710, 08815, 0A351, 0A310, 0A311,
0G300, 0G301, 0G303, 0H350, 0H351,
0M311, 0L351, 0E300, 0E301

11

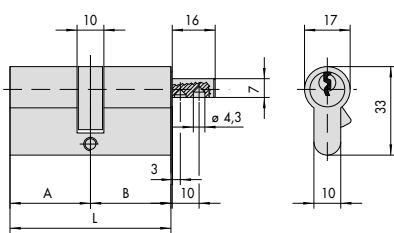


08325, 08857, 0A352, 0A312, 0E302,
0G302, 0M312, 0H352, 0L352

14

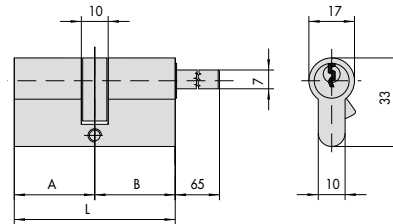

08887, 0A357, 0A317, 0G307, 0H357, 0M317, 0L357

17




1.44010.02 S
1.44011.02 15
37


12

15

18




1.72010.00

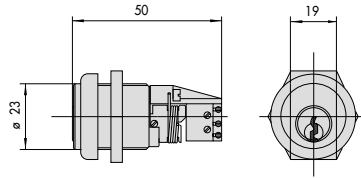


72251, 72276, 0A415,
0H415, 0L415, 0M415

19

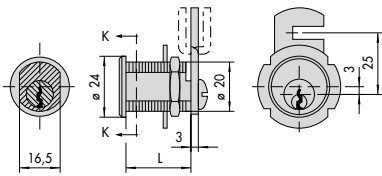


1.72210.16 - 1.72215.16	L
1.72210.20 - 1.72215.20	16,5
1.72210.25 - 1.72215.25	20
1.72210.30 - 1.72215.30	25
	30

22

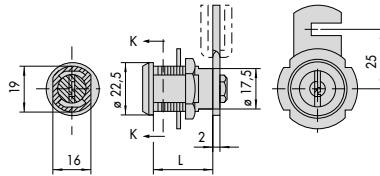

1.72350.17	L
1.72350.25	17
	25

20

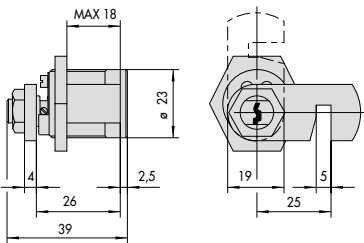

1.72250.26, 1.72275.26, 1.0A410.00,
1.0L410.00, 1.0H410.00, 1.0M410.00



23

21



CISA Locking Line brass padlocks 112
 Rectangular brass padlocks CISA Locking Line 114
 Marine Type padlocks CISA Locking Line 115
 CISA Locking Line padlocks with steel sleeve 116
 CISA Locking Line padlocks with combination lock .. 117
 Brass padlocks 118
 Marine Type padlocks..... 119
 Padlocks for european profile cylinder..... 120

LIM steel padlocks 121
 SP steel padlocks 123
 ASTRAL steel padlocks 124
 AP3 steel padlocks..... 125
 RS3 steel padlocks 126
 Padlock merchandisers..... 127
 Accessories for padlocks 128
 Spare parts for padlock 130





Technical features:


- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Shackle double-locking system (item 1.21010.20/25.0 excluded)

Supplied as standard:

- 2 keys




Type	Description	Key item						Kg	Pieces	ITEM			
		A	C	D	L	S	Pins			Type	Dim.	Hand	Fin.




• Standard shackle

20	9,6	3,5	11,3	10,4	3	1 01040 01 1	0,039	12	1 21010 20 0
25	13,5	3,9	13,1	12,0	4	1 01040 02 1	0,062	12	1 21010 25 0
30	16,2	4,7	16,9	13,8	4	1 01040 03 1	0,095	12	1 21010 30 0
40	22,1	6,3	22,4	13,8	5	1 01040 04 1	0,158	12	1 21010 40 0
50	27,9	7,9	28,7	17,0	5	1 01040 05 1	0,272	6	1 21010 50 0
60	33,5	9,5	34,7	17,2	5	1 01040 05 1	0,407	6	1 21010 60 0
70	39,0	11,0	36,0	18,0	5	1 01040 05 1	0,560	6	1 21010 70 0

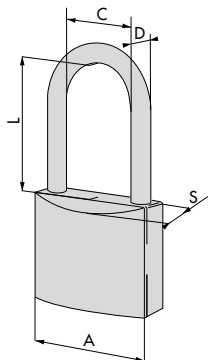

• Long shackle


30	16,2	4,7	24,0	13,8	4	1 01040 03 1	0,097	12	1 21011 30 0
40	22,1	6,3	40,0	13,8	5	1 01040 04 1	0,165	12	1 21011 40 0
50	27,9	7,9	80,0	17,0	5	1 01040 05 1	0,317	6	1 21011 50 0

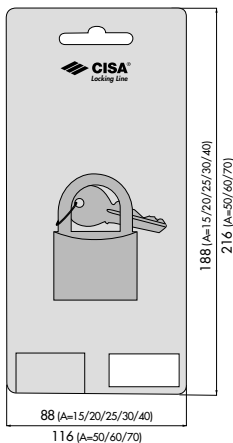

- Standard shackle
- Shrink-wrapped cardboard package


20	9,6	3,5	11,3	10,4	3	1 01040 01 1	0,039	6	1 21090 20 0
25	13,5	3,9	13,1	12,0	4	1 01040 02 1	0,062	6	1 21090 25 0
30	16,2	4,7	16,9	13,8	4	1 01040 02 1	0,095	6	1 21090 30 0
40	22,1	6,3	22,4	13,8	5	1 01040 03 1	0,158	6	1 21090 40 0
50	27,9	7,9	28,7	17,0	5	1 01040 05 1	0,272	6	1 21090 50 0
60	33,5	9,5	34,7	17,2	5	1 01040 05 1	0,407	6	1 21090 60 0

Type	Description	Key item					Unit weight Kg	Pieces	ITEM			
		A	C	D	L	S			Plus	Type	Dim. Hand	Fin.

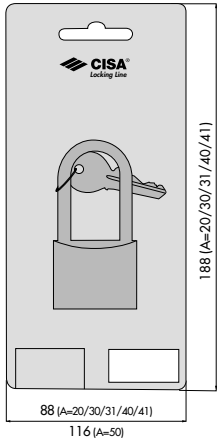

- Long shackle
- Shrink-wrapped cardboard package

30	16,2	4,7	16,9	13,8	4	1 01040 03 1	0,097	6	1 21091 30 0
40	22,1	6,3	40,0	13,8	5	1 01040 04 1	0,165	6	1 21091 40 0
50	27,9	7,9	80,0	17,0	5	1 01040 05 1	0,317	6	1 21091 50 0

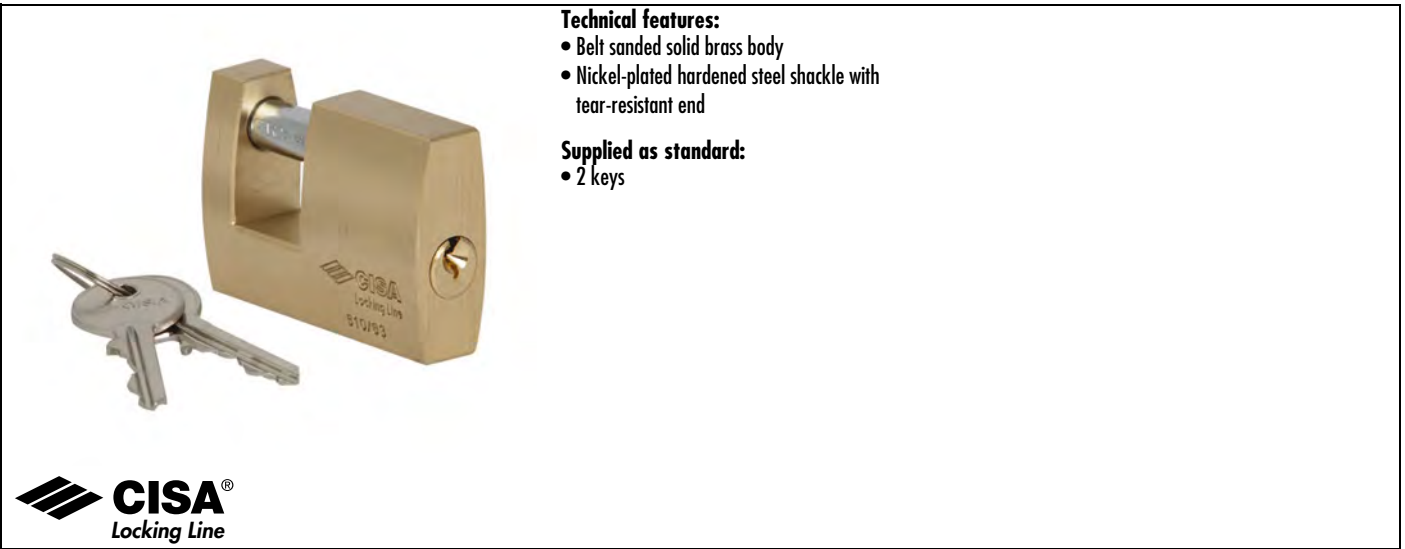

Technical features:


- Belt sanded solid brass body
- Nickel-plated hardened steel shackle with tear-resistant end

Supplied as standard:

- 2 keys



Type	Description						Key item	Kg	Box	ITEM			
		A	C	D	L	S				Pins	Type	Dim.	Hand



52	15,0	7,9	13,5	14,7	4	1 01040 03 1	0,197	6	1 21610 50 0
63	19,0	10,0	14,0	18,5	5	1 01040 04 1	0,330	6	1 21610 63 0
70	22,0	12,0	13,5	20,0	5	1 01040 04 1	0,439	6	1 21610 70 0
90	35,0	12,0	18,2	22,5	5	1 01040 05 1	0,728	6	1 21610 90 0


Technical features:

- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system

Supplied as standard:


- 2 keys

Type	Description	Dimensions					Key item	Unit weight 	Pieces 	ITEM			
		A	C	D	L	S				Type	Dim.	Hand	Pers.



• Standard shackle

29	14,5	4,7	13,8	12,8	4	1 01040 03 1	0,085	12	1 21710 30 0			
40	19,5	6,3	22,5	13,5	4	1 01040 03 1	0,153	12	1 21710 40 0			
50	28,2	7,1	26,0	14,8	5	1 01040 04 1	0,233	6	1 21710 50 0			
60	31,3	7,9	32,2	16,1	5	1 01040 04 1	0,326	6	1 21710 60 0			

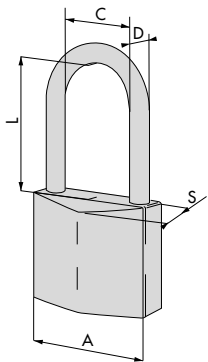

• Long shackle

40	19,5	6,3	40,0	13,5	4	1 01040 03 1	0,162	12	1 21711 40 0			
----	------	-----	------	------	---	--------------	-------	----	--------------	--	--	--



Technical features:


- Brass solid body with nickel-plated hardened steel sleeve
- Nickel-plated hardened steel shackle
- Carbonitrided steel cylinder protection plate (item 1.21810.80.0)

Supplied as standard:

- 2 keys



Type	Description	Key item					Kg	Box	ITEM			
		A	C	D	L	S			Pins	Type	Dim.	Hand



66	33,0	10,0	14,0	22,7	5	1 01040 04 1	0,598	3	1 21810 65 0
77	37,0	12,0	17,0	29,2	5	1 01040 05 1	0,843	3	1 21810 80 0




Technical features:

- Brass monoblock body
- Nickel-plated carbonitrided steel shackle
- 3 disc system (1,000 combinations) for size 20/30
- 4 disc system (10,000 combinations) for size 40



Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

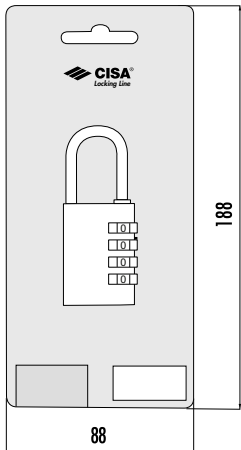

• Shrink-wrapped cardboard package

20	9,0	3,0	21,5	14,0		0,055	6	1 21190 20 0				
30	14,0	5,0	25,0	15,0		0,115	6	1 21190 30 0				
40	22,0	6,0	26,0	18,0		0,235	6	1 21190 40 0				




Technical features:

- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Version with brass shackle also available
- Shackle double-locking system (item 1.22010.15/20 excluded)
- Picking resistant brass plate

Supplied as standard:


- 2 keys

Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Pins	Type	Dim.	Hand



• Standard shackle

15	8,5	3,0	11,0	9,0	3	1 01510 00 1	0,022	12	1 22010 15 0
20	12,0	3,5	13,0	12,5	4	1 01440 00 1	0,038	12	1 22010 20 0
25	13,5	4,5	15,0	12,5	4	1 01440 00 1	0,065	12	1 22010 25 0
30	17,0	5,0	17,0	14,5	4	1 01430 00 1	0,095	12	1 22010 30 0
40	24,0	6,0	23,0	16,5	5	1 01410 00 1	0,172	12	1 22010 40 0
50	29,5	8,0	27,5	17,5	5	1 01310 00 1	0,292	6	1 22010 50 0
60	35,0	10,0	37,5	20,0	5	1 01310 00 1	0,435	6	1 22010 60 0

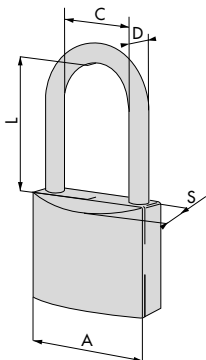

• Long shackle

20	12,0	3,5	22,0	12,5	4	1 01440 00 1	0,053	12	1 22011 20 0
30	17,0	5,0	24,0	14,5	4	1 01430 00 1	0,098	12	1 22011 30 0
30	17,0	5,0	65,0	14,5	4	1 01430 00 1	0,111	12	1 22011 31 0
40	24,0	6,0	40,0	16,5	5	1 01410 00 1	0,183	12	1 22011 40 0
40	24,0	6,0	63,5	16,5	5	1 01410 00 1	0,191	12	1 22011 41 0
50	29,5	8,0	80,0	17,5	5	1 01310 00 1	0,345	6	1 22011 50 0
50	29,5	8,0	127,0	17,5	5	1 01310 00 1	0,381	6	1 22011 52 0




Technical features:

- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system
- CISA patented anti-tampering protection device for the bolts
- Picking resistant chrome-plated brass plate
- Art. 1.26020.50/60 with LIM patented key profile

Supplied as standard:


- 2 keys

Type	Description	Key item						Unit weight	Pieces	ITEM			
		A	C	D	L	S	Pins			Kg	Type	Dim. Hand	Fin.



• Standard shackle

30	17,0	5,0	17,0	14,5	4	1 01430 00 1	0,098	12	1 26020 30 0			
40	24,0	6,0	23,0	16,5	5	1 01410 00 1	0,175	12	1 26020 40 0			
50	29,5	8,0	27,5	17,5	5	1 01310 10 1	0,295	6	1 26022 50 0			
60	35,0	10,0	37,5	20,0	5	1 01310 10 1	0,462	6	1 26022 60 0			

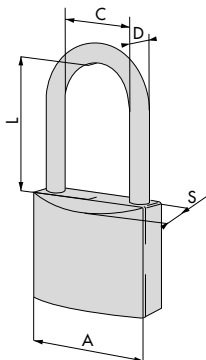

• Long shackle


40	24,0	6,0	40,0	16,5	5	1 01410 00 1	0,182	12	1 26021 40 0			
----	------	-----	------	------	---	--------------	-------	----	--------------	--	--	--



Technical features:

- Brass monoblock body
- Special steel shackle
- Compatibility with European profile single cylinder (30/10 mm) to be purchased separately

Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Pins	Type	Dim.	Hand

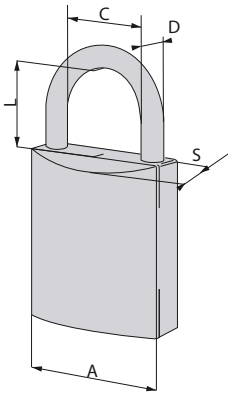

- Designed to match the following cylinders:
 - Asix item 1.0E304.02.0
 - AP3 S item 1.0H314.02.0.66
 - RS3 S item 1.0L314.02.0.66
 - C2000 item 1.0G304.02.0
 - Astral item 1.0A314.02.0
 - Astral Tekno item 1.0M314.02.0.66CL

55	27,0	9,5	39,0	27,5		0,550	6	1	26810	55	0			
----	------	-----	------	------	--	-------	---	---	-------	----	---	--	--	--




Technical features:

- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- **The removable cylinder can be either rekeyed or replaced**
- Carbonitrided steel plug protection plate
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- Desmopan impact resistant protection device (for the 28050 series)
- LIM patented key profile

Supplied as standard:

- 2 keys

Type	Description	Dimensions					Key item	Unit weight Kg	Pieces	ITEM			
		A	C	D	L	S				Type	Dim.	Hand	Pers.




- Key removable in locked position only

55	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,565	6	1	28050	55	0
55	25,0	11,0	45,0	25,0	5	1 00401 00 1	0,601	6	1	28050	56	0
55	26,0	11,0	65,0	25,0	5	1 00401 00 1	0,610	6	1	28050	57	0
70	31,0	14,0	25,0	26,0	5	1 00401 00 1	0,880	6	1	28050	70	0
70	31,0	14,0	45,0	26,0	5	1 00401 00 1	0,927	6	1	28050	71	0
70	31,0	14,0	65,0	26,0	5	1 00401 00 1	0,954	6	1	28050	72	0



- Clam packing

55	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,578	6	1	28055	55	0
55	25,0	11,0	45,0	25,0	5	1 00401 00 1	0,608	6	1	28055	56	0
55	26,0	11,0	65,0	25,0	5	1 00401 00 1	0,636	6	1	28055	57	0
70	31,0	14,0	25,0	26,0	5	1 00401 00 1	0,870	6	1	28055	70	0
70	31,0	14,0	45,0	26,0	5	1 00401 00 1	0,929	6	1	28055	71	0
70	31,0	14,0	65,0	26,0	5	1 00401 00 1	0,971	6	1	28055	72	0



- Key removable in locked position only

62	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,745	6	1	28350	62	0
73	31,0	14,0	28,0	28,0	5	1 00401 00 1	1,116	6	1	28350	73	0

TO BE DISCONTINUED


Type	Description	Key item					Unit weight	Pieces	ITEM				
		A	C	D	L	S			Pin	Type	Dim.	Hand	Fin.



• Clam packing

TO BE DISCONTINUED

62	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,768	6	1	28355	62	0
73	31,0	14,0	28,0	28,0	5	1 00401 00 1	1,140	6	1	28355	73	0



66	20,0	10,0	11,0	25,0	5	1 00401 00 1	0,685	6	1	28550	66	0
66	18,0	14,0	17,5	28,0	5	1 00401 00 1	0,837	6	1	28550	67	0
75	27,0	12,0	13,5	28,0	5	1 00401 00 1	0,852	6	1	28550	75	0
84	36,0	12,0	17,5	28,0	5	1 00401 00 1	0,970	6	1	28550	84	0
84	36,0	14,0	17,5	28,0	5	1 00401 00 1	0,983	6	1	28550	85	0



• Clam packing

66	20,0	10,0	11,0	25,0	5	1 00401 00 1	0,745	6	1	28555	66	0
66	18,0	14,0	17,5	28,0	5	1 00401 00 1	0,855	6	1	28555	67	0
75	27,0	12,0	13,5	28,0	5	1 00401 00 1	0,905	6	1	28555	75	0
84	36,0	12,0	17,5	28,0	5	1 00401 00 1	1,018	6	1	28555	84	0
84	36,0	14,0	17,5	28,0	5	1 00401 00 1	1,009	6	1	28555	85	0



Technical features:


- Patented system
- Registered key
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- **The removable cylinder can be either rekeyed or replaced**
- **KEY**
 - In nickel silver alloy
 - numbered on key bow

Supplied as standard:

- 2 keys
 - CODE CARD
- Key is protected by a Shape trademark
B02004C000170


SP

Type	Description	Dimensions					Pins	Key item	Kg	Pieces	ITEM			
		A	C	D	L	S					Type	Dim.	Hand	Fin.




• Key removable in locked position only

55	25,0	11,0	25,0	25,0	6	1 00450 01 1	0,570	6	1 28052 55 0
55	25,0	11,0	45,0	25,0	6	1 00450 01 1	0,600	6	1 28052 56 0
55	26,0	11,0	65,0	25,0	6	1 00450 01 1	0,635	6	1 28052 57 0
70	31,0	14,0	25,0	26,0	6	1 00450 01 1	0,870	6	1 28052 70 0
70	31,0	14,0	45,0	26,0	6	1 00450 01 1	0,920	6	1 28052 71 0
70	31,0	14,0	65,0	26,0	6	1 00450 01 1	0,970	6	1 28052 72 0



• Key removable in locked position only

73	31,0	14,0	28,0	28,0	6	1 00450 01 1	1,140	6	1 28352 73 0
----	------	------	------	------	---	--------------	-------	---	--------------



66	18,0	14,0	17,5	28,0	6	1 00450 01 1	0,720	6	1 28552 67 0
75	27,0	12,0	13,5	28,0	6	1 00450 01 1	0,870	6	1 28552 75 0
84	36,0	12,0	17,5	28,0	6	1 00450 01 1	0,985	6	1 28552 84 0
84	36,0	14,0	17,5	28,0	6	1 00450 01 1	1,000	6	1 28552 85 0

TO BE DISCONTINUED



Astral


Technical features:

- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY:
- flat reversible keys
- numbered on key bow

Supplied as standard:


- 2 keys
- Code Card

Type	Description	Key item						Unit weight	Pieces	ITEM				
		A	C	D	L	S	Pins			Type	Dim.	Hand	Fin.	Pers. Spec.



• Key removable in locked position only


55	25,0	11,0	25,0	25,0	10	1 00620 01 0	0,553	6	1	28053	55	0
55	25,0	11,0	45,0	25,0	10	1 00620 01 0	0,586	6	1	28053	56	0
55	26,0	11,0	65,0	25,0	10	1 00620 01 0	0,610	6	1	28053	57	0
70	31,0	14,0	25,0	26,0	10	1 00620 01 0	0,854	6	1	28053	70	0
70	31,0	14,0	45,0	26,0	10	1 00620 01 0	0,903	6	1	28053	71	0
70	31,0	14,0	65,0	26,0	10	1 00620 01 0	0,954	6	1	28053	72	0



• Key removable in locked position only

TO BE DISCONTINUED

62	25,0	11,0	25,0	25,0	10	1 00620 01 0	0,745	6	1	28353	62	0
73	31,0	14,0	28,0	28,0	10	1 00620 01 0	1,116	6	1	28353	73	0



66	20,0	10,0	11,0	25,0	10	1 00620 01 0	0,677	6	1	28553	66	0
66	18,0	14,0	17,5	28,0	10	1 00620 01 0	0,837	6	1	28553	67	0
75	27,0	12,0	13,5	28,0	10	1 00620 01 0	0,843	6	1	28553	75	0
84	36,0	12,0	17,5	28,0	10	1 00620 01 0	0,955	6	1	28553	84	0
84	36,0	14,0	17,5	28,0	10	1 00620 01 0	0,983	6	1	28553	85	0



ALI

AP3


Technical features:

- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa or Cisa Solution Partner
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY:
 - flat reversible keys, with incorporated mobile element
 - in nickel silver alloy
 - numbered on key bow

Supplied as standard:


- 2 keys
- SECURITY CARD

Type	Description	Key item					Kg	Pieces	ITEM			
		A	C	D	L	S			Pins	Type	Dim.	Hand




• Key removable in locked position only

55	25,0	11,0	45,0	25,0	15	1 00770 00 0	0,586	6	1 28058 56 0			
55	26,0	11,0	65,0	25,0	15	1 00770 00 0	0,610	6	1 28058 57 0			
70	31,0	14,0	25,0	26,0	15	1 00770 00 0	0,854	6	1 28058 70 0			
70	31,0	14,0	45,0	26,0	15	1 00770 00 0	0,903	6	1 28058 71 0			
70	31,0	14,0	65,0	26,0	15	1 00770 00 0	0,954	6	1 28058 72 0			



• Key removable in locked position only

62	25,0	11,0	25,0	25,0	15	1 00770 00 0	0,745	6	1 28358 62 0			
75	31,0	14,0	28,0	28,0	15	1 00770 00 0	0,745	6	1 28358 73 0			



66	20,0	10,0	11,0	25,0	15	1 00770 00 0	0,677	6	1 28558 66 0			
66	18,0	14,0	17,5	28,0	15	1 00770 00 0	0,837	6	1 28558 67 0			
75	27,0	12,0	13,5	28,0	15	1 00770 00 0	0,843	6	1 28558 75 0			
84	36,0	12,0	17,5	28,0	15	1 00770 00 0	0,995	6	1 28558 84 0			
84	36,0	14,0	17,5	28,0	15	1 00770 00 0	0,974	6	1 28558 85 0			

TO BE DISCONTINUED



RS3


Technical features:

- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa onyl
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY
 - flat reversible keys, with incorporated mobile element
 - in nickel silver alloy
 - numbered on key bow

Supplied as standard:


- 2 keys
- SECURITY CARD

Type	Description	Key item						Unit weight	Pieces	ITEM			
		A	C	D	L	S	Pins			Type	Dim.	Hand	Fin.



• Key removable in locked position only


55	25,0	11,0	25,0	25,0	15	1 00800 00 0	0,553	6	1	28059	55	0	00	CL
70	31,0	14,0	25,0	26,0	15	1 00800 00 0	0,854	6	1	28059	70	0	00	CL
70	31,0	14,0	45,0	26,0	15	1 00800 00 0	0,903	6	1	28059	71	0	00	CL
70	31,0	14,0	65,0	26,0	15	1 00800 00 0	0,954	6	1	28059	72	0	00	CL



• Key removable in locked position only

TO BE DISCONTINUED

62	25,0	11,0	25,0	25,0	15	1 00800 00 0	0,745	6	1	28359	62	0	00	CL
73	31,0	14,0	28,0	28,0	15	1 00800 00 0	1,150	6	1	28359	73	0	00	CL




66	20,0	10,0	11,0	25,0	15	1 00800 00 0	0,677	6	1	28559	66	0	00	CL
66	18,0	14,0	17,5	28,0	15	1 00800 00 0	0,837	6	1	28559	67	0	00	CL
75	27,0	12,0	13,5	28,0	15	1 00800 00 0	0,843	6	1	28559	75	0	00	CL
84	36,0	12,0	17,5	28,0	15	1 00800 00 0	0,995	6	1	28559	84	0	00	CL
84	36,0	14,0	17,5	28,0	15	1 00800 00 0	0,974	6	1	28559	85	0	00	CL

Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin.



• Black painted empty steel display with 15 hooks

3,550 1 1 06601 80 0




• Black painted empty steel display with 10 hooks

1,750 1 1 06601 90 0

TO BE DISCONTINUED


Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated steel padlock hasp set 		0,526 6	1	06300	14	0
	<ul style="list-style-type: none"> • Zinc plated steel padlock hasp set 		0,515 6	1	06300	18	0
	<ul style="list-style-type: none"> • Zinc plated padlock tie 	1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 26509 70 0, 1 28550 66 0, 1 28551 66 0, 1 28552 66 0, 1 28553 66 0, 1 28557 66 0, 1 28558 66 0, 1 28559 66 0	0,451 4	1	06301	50	0
	<ul style="list-style-type: none"> • Zinc plated padlock tie 	1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 26509 70 0, 1 28550 66 0, 1 28552 66 0, 1 28553 66 0, 1 28557 66 0, 1 28558 66 0, 1 28559 66 0	0,591 4	1	06301	60	0
	<ul style="list-style-type: none"> • Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover 	1 21610 90 0, 1 21810 80 0, 1 26509 94 0, 1 28550 84 0, 1 28550 85 0, 1 28552 84 0, 1 28552 85 0, 1 28553 84 0, 1 28553 85 0, 1 28557 84 0, 1 28557 85 0, 1 28558 84 0, 1 28558 85 0, 1 28559 84 0, 1 28559 85 0	1,430 1	1	06302	25	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.



- Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover

1 21610 90 0,	1,490	1	1 06302 60 0			
1 21810 80 0,						
1 26509 94 0,						
1 28550 84 0,						
1 28550 85 0,						
1 28552 84 0,						
1 28552 85 0,						
1 28553 84 0,						
1 28553 85 0,						
1 28557 84 0,						
1 28557 85 0,						
1 28558 84 0,						
1 28558 85 0,						
1 28559 84 0,						
1 28559 85 0						









- Zinc plated steel hasp for up and over doors, with removable dust cover

1 21810 80 0,	2,520	1	1 06303 00 0			
1 28550 85 0,						
1 28552 85 0,						
1 28553 85 0,						
1 28557 85 0,						
1 28558 85 0,						
1 28559 85 0						

Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 55, 56, 57 series 28350 dim. 62 	0,045	3	1	07586	04	0	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 70, 71, 72 series 28350 dim. 73 	0,045	3	1	07586	05	0	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28052 dim. 55, 56, 57 series 28352 dim. 62 	0,036 0,045	3 3	1 1	07586	06	1 2	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28052 dim. 70, 71, 72 series 28352 dim. 73 	0,045 0,045	3 3	1 1	07586	07	1 2	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 55, 56, 57 series 28353 dim. 62 	0,045	3	1	07586	08	0	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 70, 71, 72 series 28353 dim. 73 	0,045	3	1	07586	09	0	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28550 	0,010	3	1	07589	02	0	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28552 	0,045 0,045	3 3	1 1	07589	03	1 2	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28553 	0,003	3	1	07589	04	0	
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28559 	0,045	3	1	07589	05	0	

HARDENED STEEL PADLOCKS in "UNASSEMBLED" version (suffix 91), supplied without cylinder and drill resistant plates

- Steel padlocks in "UNASSEMBLED" version (suffix 91) are supplied without cylinder and without the cylinder or padlock drill resistant plate.
When ordering the padlock cylinder, you have to specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard).

PADLOCK SERIES	DRILL RESISTANT PLATE	CYLINDER "LIM" art. 1 02650 01 0	CYLINDER "SP" art. 1 02652 01 0	CYLINDER "ASIX" CYLINDER "ASTRAL" art. 1 0E600 00 0 art. 1 0A610 00 0	CYLINDER "ASTRAL TEKNO" CYLINDER "AP3 S" art. 1 0M610 00 0 art. 1 0H610 00 0	CYLINDER "RS3 S" art. 1 0L610 00 0
28000 (Dim. 55/56/67) 28300 (Dim. 62)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	art. 1 07586 04 0	art. 1 07586 06 1/2	art. 1 07586 08 0	art. 1 07586 08 0	art. 1 07586 10 0
28000 (Dim. 70/71/72/73)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	art. 1 07586 05 0	art. 1 07586 07 1/2	art. 1 07586 09 0	art. 1 07586 09 0	art. 1 07586 11 0
28500 (Dim. 66/67/75/84/85)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	art. 1 07589 02 0	art. 1 07589 03 1/2	art. 1 07589 04 0	art. 1 07589 04 0	art. 1 07589 05 0

N.B. For plates to be coupled to "SP" cylinders you have to state the hand. In this case, to avoid possible doubts, you also have to state the key code in the description (this can be taken from the 3 first figures on the key head).

Ex: 1 02652 01 0 + 1 07589 03 1 with SP key code. **102:**

("SP" cylinder complete with cylinder drill resistant plate and padlocks drill resistant plate, for right handed (1) keys, for padlocks art. 1 28550 66 0 00 91).





Locks for
steel doors



Cylinder electric rim locks - elettrika.....	135
Booster, booster plus, coil set BTicino, microswitch device for elettrika rim locks.....	136
Cylinder electric rim locks	137
Cylinder rim locks for shutters	139
Cylinder mortice locks for gates.....	142
Cylinder mortice locks rolling-shutters and railings....	145
Cylinder mortice locks for shutters	146
Cylinder mortice locks.....	148

Cylinder rim locks.....	151
Multithrow cylinder rim locks	153
Cylinder mortice locks.....	154
Cylinder mortice locks, mid-rail type H=64 mm.....	155
Double-bit key mortice locks	156
Double-bit key mortice locks	158
Accessories for metal locks	161
Dimensional drawings	170





Technical features:

- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12V ac CE power supply
- Current absorption 3 A
- Non-handed and with a variable backset from 50 to 80 mm

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1

On request:

- Booster device item 1.07022.00.0
- Booster plus device item 1.07022.10.0
- Coil set BTicino device item 1.07025.10.0
- Microswitch device item 1.07023.00.0
- Lighted indicator kit item 1.07126.01.0

Certification:






- ELETTRIKA is certified according to the European standard prEN 14846:06:
 - Security degree 6
 - (2,000 Kg lateral push resistance)

Hand:

0 = Non-handed

Elettrika

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Back plate for lock and striker to be welded 		50÷80	2,780	1	1	1A721	00	0		
	<ul style="list-style-type: none"> • Galvanized version • Welding plate and striker spacer 		50÷80	2,800	1	1	1A721	00	0 79		
	<ul style="list-style-type: none"> • Back plate for lock and striker to be welded • Inner push-button • Hold open device 		50÷80	2,800	1	1	1A731	00	0		
	<ul style="list-style-type: none"> • Galvanized version • Welding plate and striker spacer • Inside button • Hold-open device • Galvanized protective case 		50÷80	2,800	1	1	1A731	00	0 79		
	<ul style="list-style-type: none"> • Inner push-button • 12 V ac CE • Absorbed power 3A • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Striker Weld plate Weld striker spacer Strike spacer set (2pcs) Fixing screws Keys item 1.01070.10.1 Instruction sheet 		50÷80	2,780	1	1	1A611	00	0 00 DF		

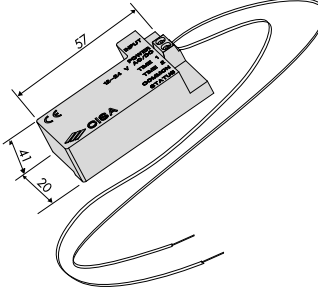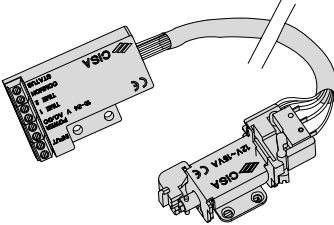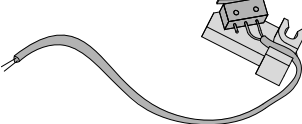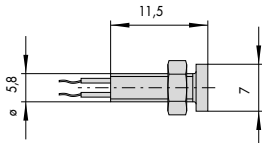Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Booster device may be combined with ElettriKa rim lock to have the following function: Door condition signal Electric hold open device Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply • Supplied as standard: Pin to deactivate hold open catch Fixing screws Instructions sheet • Please note: Booster device may be combined also with all electric locks (electric striker escluded) 	0,085	6	1	07022	00	0	
	<ul style="list-style-type: none"> • Booster Plus device may be combined with ElettriKa rim lock to have the following function: Electronic opening timer with 5 different options (120 sec default) Door condition signal Electric hold open device Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply • Supplied as standard: Pin to deactivate hold open catch Fixing screws Instructions sheet • ON REQUEST: Open door indicator item 1.07126.01.0 	0,185	1	1	07022	10	0	
	<ul style="list-style-type: none"> • Coil for Bticino intercommunication system audio swing ref. 344702-03-04 Video intercommunication system video swing ref. 344902-03-04 combined with elettriKa rim lock give door control signal • Supplied as standard: Fixing screws Instructions sheet 	0,092	1	1	07025	10	0	
	<ul style="list-style-type: none"> • Microswitch Give a signal to operate rration motor may be installed directly on the elettriKa rim lock • Supplied as standard: instruction sheet 	0,007	6	1	07023	00	0	
	<ul style="list-style-type: none"> • Open door indicator 	0,005	1	1	07126	01	0	



Technical features:

- Zinc-plated steel case and striker
- Dead-locking latch
- 12 V ac CE
- Current absorption 2,5 A
- External cylinder length: 55 mm.

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 3 keys item 1.01070.10.1











Certifications:

- This electric lock series is certified according to the European standard EN 14846:08:- Security degree 3 (500 Kg lateral push resistance and 200 Kg front push resistance)

Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards
- 3 = R.H. outwards
- 4 = L.H. outwards

Type	Description	Cylinder	Throws	Backset	Unit weight 		ITEM			
							Type	Dim.	Hand	Fin. Pars. Spec.
<ul style="list-style-type: none"> • Protective back plate • Spacer 	<p>1 02139 00 0</p>	50	2,090	1	1 11721	50	1			
		50	2,095	1	1 11721	50	2			
		60	2,091	1	1 11721	60	1			
		60	2,085	1	1 11721	60	2			
		70	2,090	1	1 11721	70	1			
		70	2,090	1	1 11721	70	2			
		80	2,090	1	1 11721	80	1			
		80	2,060	1	1 11721	80	2			
<ul style="list-style-type: none"> • Protective back plate • Spacer • Push-button • Hold-open device 	<p>1 02110 00 0</p>	50	2,100	1	1 11731	50	1			
		50	2,103	1	1 11731	50	2			
		60	2,085	1	1 11731	60	1			
		60	2,100	1	1 11731	60	2			
		70	2,100	1	1 11731	70	1			
		70	2,100	1	1 11731	70	2			
		80	2,100	1	1 11731	80	1			
		80	2,085	1	1 11731	80	2			
<ul style="list-style-type: none"> • Manual throw dead-bolt • Protective back plate • Spacer 	<p>1 02145 00 1</p>	2 50	2,200	1	1 11761	50	1			
		2 50	2,218	1	1 11761	50	2			
		2 60	2,216	1	1 11761	60	1			
		2 60	2,210	1	1 11761	60	2			
		2 70	2,200	1	1 11761	70	1			
		2 70	2,222	1	1 11761	70	2			
		2 80	2,230	1	1 11761	80	1			
		2 80	2,250	1	1 11761	80	2			
<ul style="list-style-type: none"> • Manual throw dead-bolt • Protective back plate • Spacer • Push-button 	<p>1 02145 00 0</p>	2 50	2,205	1	1 11771	50	1			
		2 50	2,205	1	1 11771	50	2			
		2 60	2,200	1	1 11771	60	1			
		2 60	2,220	1	1 11771	60	2			
		2 70	2,210	1	1 11771	70	1			
		2 70	2,210	1	1 11771	70	2			
		2 80	2,231	1	1 11771	80	1			
		2 80	2,251	1	1 11771	80	2			

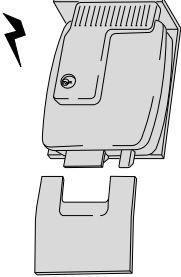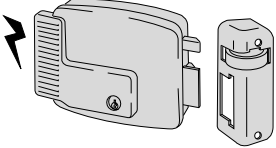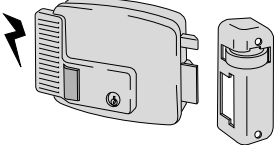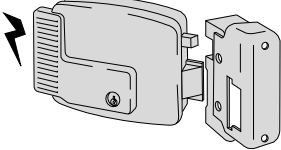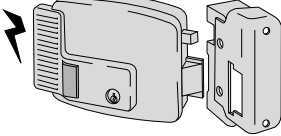Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • For automated and up-and-over gates • Protective back plate • External cylinder length: 70 mm. 	 1 02142 00 0	80	2,100	1	1	11823	80	1			
			80	2,100	1	1	11823	80	2			
		 1 02139 00 0	50	1,450	1	1	11921	50	1			
			50	1,450	1	1	11921	50	2			
			60	1,479	1	1	11921	60	1			
			60	1,472	1	1	11921	60	2			
			70	1,472	1	1	11921	70	1			
			70	1,476	1	1	11921	70	2			
			80	1,470	1	1	11921	80	1			
			80	1,475	1	1	11921	80	2			
	<ul style="list-style-type: none"> • Push-button • Hold-open device 	 1 02110 00 0	50	1,475	1	1	11931	50	1			
			50	1,475	1	1	11931	50	2			
			60	1,470	1	1	11931	60	1			
			60	1,472	1	1	11931	60	2			
			70	1,475	1	1	11931	70	1			
			70	1,478	1	1	11931	70	2			
			80	1,470	1	1	11931	80	1			
			80	1,472	1	1	11931	80	2			
	<ul style="list-style-type: none"> • FOR OUTWARD OPENING GATES 	 1 02139 00 0	50	1,539	1	1	11921	50	3			
			50	1,538	1	1	11921	50	4			
			60	1,534	1	1	11921	60	3			
			60	1,534	1	1	11921	60	4			
			70	1,533	1	1	11921	70	3			
			70	1,538	1	1	11921	70	4			
			80	1,539	1	1	11921	80	3			
			80	1,534	1	1	11921	80	4			
	<ul style="list-style-type: none"> • FOR OUTWARD OPENING GATES • Push-button • Hold-open device 	 1 02110 00 0	50	1,536	1	1	11931	50	3			
			50	1,530	1	1	11931	50	4			
			60	1,532	1	1	11931	60	3			
			60	1,532	1	1	11931	60	4			
			70	1,530	1	1	11931	70	3			
			70	1,534	1	1	11931	70	4			
			80	1,532	1	1	11931	80	3			
			80	1,532	1	1	11931	80	4			



Technical features:

- Zinc-plated steel case
- Steel deadbolts with 25 mm travel (for the series 41600, 41620 and 41650, 24 mm travel)
- Brass cylinder

Supplied as standard:


- 3 keys
- ITEMS 41010 - 41110 - 41111:
inside: 1 key item 1.01310.00.2
outside: 2 keys item 1.01330.00.1
- ITEMS 41210 - 41220 - 41221 - 41230 - 41231 - 41310 - 41311 - 41320:
inside: 1 key item 1.01310.00.2
outside: 2 keys item 1.01320.00.1

- ITEMS 41410 - 41420 - 41421:
inside: 1 key item 1.01320.00.2
outside: 2 keys item 1.01330.00.1
- ITEMS 41510 - 41525 - 41526:
2 keys item 1.01060.10.0
- ITEMS 41600 - 41650:
2 keys item 1.01070.10.1
- Cylinder fixing screw (series 41620)

Hand:


- 0 = Non-handed
- 1 = R.H.
- 2 = L.H

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Kg	Pieces	ITEM			
											Type	Dim.	Hand	Fin.




• Central application

1 02544 14 0	160	55	11,5	13,0	2	80	0,508	2	1 41010	80	0			
1 02544 15 0	155	55	6,5	20,0	2	78	0,551	2	1 41210	78	0			
1 02544 15 0	155	55	9,5	17,0	2	78	0,540	2	1 41320	78	0			
1 02544 10 0	155	55	6,0	15,0	2	78	0,518	2	1 41410	78	0			




• Lateral application

1 02544 14 0	120	55	11,5	15,0	2	78	0,420	2	1 41110	60	1			
1 02544 14 0	120	55	11,5	13,0	2	60	0,424	2	1 41110	60	2			
1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1 41220	78	1			
1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1 41220	78	2			
1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1 41230	78	1			
1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1 41230	78	2			
1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1 41310	78	1			
1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1 41310	78	2			
1 02544 10 0	155	55	6,0	15,0	2	78	0,490	2	1 41420	78	1			
1 02544 10 0	155	55	6,0	15,0	2	78	0,498	2	1 41420	78	2			









• Pair of locks with lateral application
(1 pc.rh, 1 pc.lh)

1 02544 14 0	120	55	11,5	13,0	2	60	0,848	2	1 41110	60	0			
1 02544 15 0	155	55	6,5	20,0	2	78	1,060	2	1 41220	78	0			
1 02544 15 0	155	55	6,5	20,0	2	78	1,054	2	1 41230	78	0			
1 02544 15 0	155	55	9,5	17,0	2	78	1,024	2	1 41310	78	0			
1 02544 10 0	155	55	6,0	15,0	2	78	0,996	2	1 41420	78	0			



- Pair of locks with lateral application
(1 pc.rh, 1 pc.lh)
- Keyed alike (KA)
- 3 keys per pair

1 02544 14 0	120	55	11,5	13,0	2	60	0,800	2	1 41110	60	0			
1 02544 15 0	155	55	6,5	20,0	2	78	1,060	2	1 41221	78	0			
1 02544 15 0	155	55	6,5	20,0	2	78	1,054	2	1 41231	78	0			
1 02544 15 0	155	55	9,5	17,0	2	78	1,024	2	1 41311	78	0			
1 02544 10 0	155	55	6,0	15,0	2	78	0,940	2	1 41421	78	0			

Type	Description	Cylinder	Cylinder				Throws	Backset	Unit weight Kg	Pieces	ITEM					
			L	A	B	S					Type	Dim.	Hand	Fin.	Pers.	Spec.
 	<ul style="list-style-type: none"> • Central application • Straight deadbolt • 2 Ø 9 mm pins 	155	55	5,5	15,0	2	78	0,525	12	1	41510	78	0			
	<ul style="list-style-type: none"> • Version with fixing plate assembled • Central application • Straight deadbolt • 2 Ø 9 mm pins 	155	55	5,5	15,0	2	78	0,518	12	1	41510	78	0	00	TC	
	<ul style="list-style-type: none"> • Version with pins and fixing plate assembled • Central application • Straight deadbolt • 2 Ø 9 mm pins 	155	55	5,5	15,0	2	78	0,518	12	1	41510	78	0	00	ZQ	
 	<ul style="list-style-type: none"> • Lateral application • Bent deadbolt • 1 Ø 9 mm pins 	155	55	5,5	15,0	2	78	0,445	12	1	41525	78	1			
		155	55	5,5	15,0	2	78	0,490	12	1	41525	78	2			
 	<ul style="list-style-type: none"> • Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • 2 Ø 9 mm pins 	155	55	5,5	15,0	2	78	0,800	6	1	41525	78	0			
	<ul style="list-style-type: none"> • Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 Ø 9 mm pins 	155	55	5,5	15,0	2	78	0,875	6	1	41526	78	0			

Type	Description	Cylinder	Cylinder				Throws	Backset	Unit weight 	Pieces 	ITEM			
			L	A	B	S					Type	Dim. Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • FOR SWING DOORS • Top lock • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: KA (Keyed Alike) system 		155	55	15,0	1		0,462	12	1	41600	00	0	
	<ul style="list-style-type: none"> • FOR SWING DOORS • Top lock • European profile cylinders to order separately • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: Cylinder fixing screws 		155	55	15,0	1		0,383	12	1	41620	00	0	
	<ul style="list-style-type: none"> • FOR EXTENSIBLE GATES • Top and bottom locks • European profile cylinders to order separately • OPERATION: from the outside: with key only • ON REQUEST: KA (Keyed Alike) system 		102	26	22,0	16,0	2	68	0,300	12	1	41650	00	0



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Steel dead-bolt

Supplied as standard:

- Cylinder fixing screws (for versions with European profile cylinders)

Hand:







0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Latch with built-in dead-bolt • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1 	1	22	50	0,789	2	1	42010	50	0	
	<ul style="list-style-type: none"> • Latch with built-in dead-bolt 	1	22	50	0,609	2	1	42012	50	0	
	<ul style="list-style-type: none"> • Dead-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1 	2	22	50	0,735	2	1	42020	50	0	
	<ul style="list-style-type: none"> • Dead-bolt only 	2	22	50	0,550	2	1	42022	50	0	
	<ul style="list-style-type: none"> • Non-handed • Latch with built-in dead-bolt • Inside knob • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1 	1	22	50	0,804	2	1	42030	50	0	
	<ul style="list-style-type: none"> • Non-handed • Latch with built-in dead-bolt • Inside knob 	1	22	50	0,607	2	1	42032	50	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Latch-bolt only Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	22	30	0,657	2	1 42110 30 0						
	<ul style="list-style-type: none"> Latch-bolt only 	22	30	0,470	2	1 42112 30 0						
	<ul style="list-style-type: none"> Latch-bolt only Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	1	22	30	0,620	2	1 42120 30 0					
	<ul style="list-style-type: none"> Dead-bolt only 	1	22	30	0,425	2	1 42122 30 0					
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	42	22	30	0,713	2	1 42210 30 0					
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle 	42	22	30	0,520	2	1 42212 30 0					
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	1	42	22	50	0,832	2	1 42310 50 0				
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle 	1	42	22	50	0,650	2	1 42312 50 0				

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Latch and dead-bolt (the latch is withdrawn by key and handle) Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	1	57	22	30	0,853	2	1	42410	30	0	
	<ul style="list-style-type: none"> Latch and dead-bolt (the latch is withdrawn by key and handle) Through spindle 	1	57	22	30	0,671	2	1	42412	30	0	
	<ul style="list-style-type: none"> Latch and dead-bolt (the latch is withdrawn by key and handle) Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	2	57	22	30	0,724	2	1	42420	30	0	
	<ul style="list-style-type: none"> Latch and dead-bolt (the latch is withdrawn by key and handle) Through spindle 	2	57	22	30	0,538	2	1	42422	30	0	
	<ul style="list-style-type: none"> Latch and dead-bolt (the latch is withdrawn by key and handle) Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	2	57	22	50	1,018	2	1	42510	50	0	
	<ul style="list-style-type: none"> Latch and dead-bolt (the latch is withdrawn by key and handle) Through spindle 	2	57	22	50	0,825	2	1	42512	50	0	



Technical features:

- Steel case
- Steel faceplate
- Lamellar steel deadbolt protected by single throw armour plating
- 13 mm driving gears stroke for additional locking points
- Spindle for operating the dead bolt and driving gears
- Deadbolt resistance equivalent to Grade 3 Security of the European Standard EN 12209:03
 - Side load resistance: 1,000 kg (equivalent to highest grade according to the above Standard)
 - Resistance to blows from below: 400 kg
- Suitable for doors certified to EN 1627:2011 up to WK/RC 2 resistance class

Supplied as standard:

- Cylinder fixing screws

Finishes:

- Zinc-plated case
- Zinc-plated faceplate
- Zinc-plated deadbolt

Hand:


0 = Non-handed

Cylinder to be ordered separately




0G303, 0G305, 0E303, 0E305

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Latch bolt only
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
European profile cylinders with special cam:
Item 1-0G305-02-0-12 (C2000 single cylinder)
Item 1-0G303-07-0-12 (C2000 double cylinder)
Item 1-0E305-02-0-12 (ASIX single cylinder)
Item 1-0E303-07-0-12 (ASIX double cylinder)
Handle art. 1-06003-00-0
Handle with edge cover art. 1-06004-00-0
Striking plate art. 1-06232-21-0
Adjustable striking plate art. 1-06232-22-0
Screwed extended bolts art. 1-07088-03-0

1	59	25	19,7	0,590	24	1	46305	19	0		
1	59	25	25,7	0,672	24	1	46305	25	0		
1	59	25	31	0,780	24	1	46305	30	0		



- Dead bolt only
- Pin key cylinder complete with 2 pieces item 1.00210.00.0 (KA 1 version, key included)
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
Handle item 1.06003.01.0
Handle with edge cover item 1.06004.01.0
Striker item 1.06232.21.0
Adjustable striker item 1.06232.22-0
Extended bolts item 1.07088.03.0

1	59	25	19,7	0,709	24	1	46307	19	0		
1	59	25	25,7	0,804	24	1	46307	25	0		



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Pre-arranged for additional locking points

Operation:

- The handle operates both the swinging dead-bolt and the extended bolts, bringing them in the locking position; the key blocks the handle

Supplied as standard:

- Pair of threaded bushings (M8) item 1.06290.10.0
- Pair of bushings for quick-lock system (series 46303)
- Cylinder fixing screws
- Instruction sheet

Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.



- Nickel-plated dead-bolt
- Inside steel rose item 1.06092.00.0
- ON REQUEST:
Extended bolts item 1.07088.03.0
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.21.0


1	85	25	25	0,590	12	1	46300	25	0
1	85	25	30	0,620	12	1	46300	30	0
1	85	25	35	0,650	12	1	46300	35	0

WHILE STOCK LASTS
Replaced by 46800 serie

- Nickel-plated dead-bolt
- Inside steel rose item 1.06092.00.0
- ON REQUEST:
Extended bolts item 1.07088.04.0.00.CG (without tips)
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.21.0

1	85	25	30	0,625	12	1	46303	30	0
---	----	----	----	-------	----	---	-------	----	---


WHILE STOCK LASTS
Replaced by 46803 serie



- Nickel-plated dead-bolt
- Cross-key cylinder with 3 keys
- Inside steel rose item 1.06002.00.0
- ON REQUEST:
Extended bolts item 1.07088.03.0
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.21.0

1	85	25	25	0,720	12	1	46302	25	0
1	85	25	30	0,750	12	1	46302	30	0
1	85	25	35	0,766	12	1	46302	35	0

WHILE STOCK LASTS
Replaced by 46802 serie



- Nickel-plated hook
- Inside steel rose item 1.06092.00.0
- Zinc plated steel striker item 1.06232.21.0
- ON REQUEST:
Extended bolts item 1.07088.03.0
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0

1	85	25	25	0,580	12	1	46365	25	0
1	85	25	30	0,600	12	1	46365	30	0
1	85	25	35	0,702	12	1	46365	35	0

WHILE STOCK LASTS
Replaced by 46865 serie

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Without frontal locking
- Inside steel rose item 1.06092.00.0
- ON REQUEST:
 - Extended bolts item 1.07088.03.0
 - Cylinder with pin key item 1.02400.10.0
 - Floor striker item 1.06086.00.0
 - Floor striker with dust cover item 1.06086.02.0

85	25	25	0,540	12	1	46375	25	0			
85	25	30	0,560	12	1	46375	30	0			
85	25	35	0,625	12	1	46375	35	0			

WHILE STOCK LASTS
Replaced by 46875 serie



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Nickel-plated dead-bolt
- Reversible latch bolt
- Current absorption 3,1 A
- Power supply 12V ac cc

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet

On request:

- Protective rose for cylinder, art. 1.06460.00.0

Standards:


- Certification
- This lock series is certified according to the European standard EN 12209:03 - Security degree 3 (500 Kg lateral push resistance and 400 Kg upward push resistance)
- Suitable for doors certified to EN 1627:2011 up to WK/RC 2 resistance class

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Spec.



- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of steel roses item 1.06092.00.0
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Extended bolts item 1.06441.15.0
Extended bolts item 1.07088.03.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Striker item 1.06232.20.0

1	85	25	25	0,901	12	1	16325 25 0
1	85	25	30	0,937	12	1	16325 30 0
1	85	25	35	0,985	12	1	16325 35 0




- Dead-bolt and latch
- Set of steel roses item 1.06092.00.0
- ON REQUEST:
Striker item 1.06232.20.0

1	85	25	25	0,590	12	1	46315 25 0
1	85	25	30	0,625	12	1	46315 30 0
1	85	25	35	0,680	12	1	46315 35 0

WHILE STOCK LASTS
Replaced by 46815 serie

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Dead-bolt only
- Steel rose item 1.06092.00.0
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 Extended bolts item 1.06441.15.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Striker item 1.06232.21.0


1	25	25	0,618	12	1	46320	25	0			
1	25	30	0,673	12	1	46320	30	0			
1	25	35	0,687	12	1	46320	35	0			

WHILE STOCK LASTS
Replaced by 46820 serie

- Dead-bolt only
- Pre-arranged for additional locking points
- Pair of bushings for quick-lock system (series 46323)
- Inside steel escutcheon item 1.06092.00.0
- ON REQUEST:
 Quick-lock extended bolts item 1.07088.04.0.00.CG (without tips)
 Cylinder with pin key item 1.02400.10.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Striking plate item 1.06232.21.0

1	25	25	0,551	12	1	46323	25	0			
---	----	----	-------	----	---	-------	----	---	--	--	--


WHILE STOCK LASTS
Replaced by 46823 serie



- Dead-bolt only
- Cross-key cylinder with 3 keys
- Set of nylon rose item 1.06002.00.0
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 Extended bolts item 1.06441.15.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Striker item 1.06232.21.0

1	25	25	0,687	12	1	46322	25	0			
1	25	30	0,707	12	1	46322	30	0			
1	25	35	0,727	12	1	46322	35	0			

WHILE STOCK LASTS
Replaced by 46822 serie




- Dead-bolt and latch
- Pre-arranged for additional locking points
- Set of steel rose item 1.06092.00.0
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 Extended bolts item 1.06441.15.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Striker item 1.06232.20.0

1	85	25	25	0,682	12	1	46325	25	0		
1	85	25	30	0,750	12	1	46325	30	0		
1	85	25	35	0,758	12	1	46325	35	0		

WHILE STOCK LASTS
Replaced by 46825 serie

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Dead-bolt and latch
- Cross-key cylinder with 3 keys
- Pre-arranged for additional locking points
- Set of nylon rose item 1.06002.00.0
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 Extended bolts item 1.06441.15.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Striker item 1.06232.20.0

1	85	25	25	0,797	12	1	46327	25	0
1	85	25	30	0,817	12	1	46327	30	0
1	85	25	35	0,837	12	1	46327	35	0

WHILE STOCK LASTS
 Replaced by 46827 serie



Technical features:

- Zinc plated steel case and striker, paintend amaranth red item 1.50171.60.1.00.66 1.50171.60.2.00.66
- Brass latch and dead-bolt
- Brass draw-back pull and knob

Hand:











- 1 = R.H. inwards
- 2 = L.H. inwards





Supplied as standard:

- Striker
- Fixing screws
- 3 keys item 1.01070.10.1

On request:

- Protective back plate and striker spacer item 1.07061.10.0

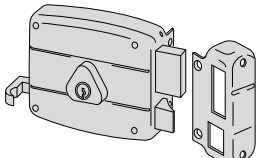Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers.	Spec.
 <ul style="list-style-type: none"> • With fixing tongue • Inside draw-back pull 		 1 02106 00 0	2	60	1,050	1	1	50421	60	1		
			2	60	1,050	1	1	50421	60	2		
			2	70	1,120	1	1	50421	70	1		
			2	70	1,120	1	1	50421	70	2		
 <ul style="list-style-type: none"> • With fixing tongue • Inside draw-back pull 		 1 02106 00 0	2	50	0,965	1	1	50461	50	1		
			2	50	0,975	1	1	50461	50	2		
 <ul style="list-style-type: none"> • With fixing tongue • Through spindle 		 1 02106 00 0	2	60	1,150	1	1	50471	60	1		
			2	60	1,170	1	1	50471	60	2		
 <ul style="list-style-type: none"> • With fixing tongue • Inside knob • Through spindle 		 1 02552 50 0	2	60	1,150	1	1	50481	60	1		
			2	60	1,160	1	1	50481	60	2		
 <ul style="list-style-type: none"> • Amaranth red lacquered case and striker • With tongue • Through spindle 		 1 02106 00 0	2	60	1,160	1	1	50171	60	1	00	66
			2	60	1,160	1	1	50171	60	2	00	66

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> • Without fixing tongue • Inside draw-back pull 		 1 02106 00 0	2	60	1,010	1	1	50521	60	1
			2	60	1,040	1	1	50521	60	2
			2	70	1,080	1	1	50521	70	1
			2	70	1,080	1	1	50521	70	2
 <ul style="list-style-type: none"> • Without fixing tongue • Through spindle 		 1 02106 00 0	2	60	1,110	1	1	50571	60	1
			2	60	1,120	1	1	50571	60	2



Technical features:

- Nickel-plated steel case and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns
- Nickel-plated cylinder

Hand:

1 = R.H. inwards

Supplied as standard:

- 3 keys item 1.01070.10.1

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim. Hand	Fin.	Pers. Spec.
	• Deadbolt only		6	50	1,125	12	1	55254	50	1
			6	60	1,160	12	1	55254	60	1
	• Deadbolt with built-in latchbolt		6	50	0,950	12	1	55274	50	1
			6	60	0,950	12	1	55274	60	1



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt
- Pre-arranged for protective roses

Supplied as standard:

- Inside steel escutcheon item 1.06075.00.0
- Cylinder fixing screws
- Instruction sheet

On request:

- Zinc-plated, steel striking plate item 1.06232.00.0


Hand:

0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.



- Case height 82 mm.

3	25	52	0,600	12	1 56013 50 0
3	25	60	0,635	12	1 56013 60 0
3	25	70	0,675	12	1 56013 70 0



- Case height 82 mm.
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.10.0
- ON REQUEST:
 Extended bolts item 1.06415.00.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0

3	25	60	0,731	12	1 56016 60 0
3	25	70	0,770	12	1 56016 70 0



Technical features:

- Galvanized steel case, height 64 mm
- Galvanized steel faceplate
- Adjustable latchbolt, 11 to 17 mm
- 3-throw deadbolt, 11 mm
- Square spindle, 8 mm
- Cylinder fixing via lock internal screw

Supplied as standard:

- Threaded fixing pins for bushings and extended bolts, item 1.06449.05.0
- Pair of steel roses item 1.06075.00.0
- Pair of threaded bushings (M8) item 1.06290.05.0
- Instruction sheet
- Fixing screws


On request:

- Adjustable metal striker plates
- Modular roller assembly item 1.06168.00.0
- Nylon rose item 1.06141.56.0 ensuring interchangeability with series 57300
- Cylinder protective rose item 06460.05.50/51/60/61.0

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Stainless steel faceplate 25x3 mm
- Reversible latch and dead-bolt
- On request
 - "MODULAR" roller assembly item 1.06168.00.0
 - Floor striker item 1.06086.00/02.0
 - Zinc-plated steel striking plate item 1.06232.01.0 or item 1.06232.00.0
 - Cylinder protective rose item 106460.05/50/51/60/61
 - Rose for locks series 57300 item 1.06141.56.0 or item 1.06473.00.0
 - Extended bolts item 1.06441.15.0
 - Extended bolts with screws item 1.07088.03/05.0

3 67 25 90 0,930 12 1 56358 90 0



- MODULAR roller assembly for locks series 56357 and 56358

0,040 12 1 06168 00 0



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt

Hand:
0 = Non-handed

Supplied as standard:

- Inside steel escutcheon item 1.06124.02.0
- Instruction sheet

On request:

- Zinc-plated steel striking plate item 1.06232.00.0

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys 		4	25	52	0,788	12	1	57013	50	0	00	30
			4	25	60	0,833	12	1	57013	60	0	00	30
			4	25	70	0,868	12	1	57013	70	0	00	30
	<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 		4	25	52	0,760	12	1	57013	52	0	00	30
			4	25	60	0,812	12	1	57013	62	0	00	30
			4	25	70	0,833	12	1	57013	72	0	00	30
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 		4	25	60	0,940	12	1	57016	60	0		
			4	25	70	0,982	12	1	57016	70	0		
	<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 		4	25	60	0,925	12	1	57016	62	0		
			4	25	70	0,963	12	1	57016	72	0		
		<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • Dead-bolt with 3 locking points 		4	25	60	0,754	12	1	57030	60	0	
4				25	70	0,780	12	1	57030	70	0		
<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 			4	25	60	0,735	12	1	57030	62	0		
			4	25	70	0,773	12	1	57030	72	0		

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM								
									Type	Dim.	Hand	Fin.	Peris. Spec.				
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • Dead-bolt with 3 locking points • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	 1 00100 00 1	4	25	60	0,848	12	1	57035	60	0						
			4	25	70	0,919	12	1	57035	70	0						
		 1 00100 00 1	<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 	4	25	60	0,838	12	1	57035	62	0					
				4	25	70	0,870	12	1	57035	72	0					
					<ul style="list-style-type: none"> • Case height 93 mm. • 2 keys • As above, keyed alike (KA) • 1 key 	 1 00100 00 1	2	22	40	0,520	12	1	57223	40	0		
							2	22	45	0,540	12	1	57223	45	0		
2	22	50	0,560				12	1	57223	50	0						
2	22	60	0,592				12	1	57223	60	0						
 1 00100 00 1	2	22	40			0,506	12	1	57223	42	0						
	2	22	45			0,524	12	1	57223	47	0						
	2	22	50			0,545	12	1	57223	52	0						
	2	22	60			0,578	12	1	57223	62	0						
	<ul style="list-style-type: none"> • Case height 93 mm. • 2 keys • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 • As above, keyed alike (KA) • 1 key 	 1 00100 00 1	2	25	45	0,670	12	1	57226	45	0						
			2	25	50	0,687	12	1	57226	50	0						
			2	25	60	0,730	12	1	57226	60	0						
		 1 00100 00 1	2	25	45	0,657	12	1	57226	47	0						
			2	25	50	0,664	12	1	57226	52	0						
			2	25	60	0,708	12	1	57226	62	0						



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt
- Picking resistant protection plate
- Nickel-plated latch or reversible latch/bolt
- Electrical and mechanical versions are interchangeable
- Power supply 12V ac cc
- Current absorption 1,7 A


Hand:

0 = Non-handed

Supplied as standard:

- Instruction sheet

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.




- Case height 78 mm.
- 2 keys
- Dead-bolt and latch
- Adjustable latch and piston
- Dead-locking latch
- Hold-open device
- Pair of steel roses item 1.06124.02.0
- ON REQUEST:
Zinc plated steel striker item 1.06232.00.0



1 00100 00 1

4 67 25 90 1,220 12 1 17353 90 0



- Case height 78 mm.
- 2 keys
- Dead-bolt and latch
- Adjustable latch and piston
- Dead-locking latch
- Hold-open device
- Pair of steel roses item 1.06124.02.0
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded rods for fixing extended bolts
- ON REQUEST:
Extended bolts item 1.06441.15.0
Extended bolts item 1.07088.03.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.00.0




1 00100 00 1

4 67 25 90 1,312 12 1 17358 90 0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
									Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> Case height 82 mm. 2 keys Dead-bolt and latch Inside steel rose item 1.06124.02.0 ON REQUEST: Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	70	1,000	12	1	57313	73	0		
	<ul style="list-style-type: none"> As above, keyed alike (KA) 1 key 	 1 00100 00 1	4	67	25	70	1,016	12	1	57313	72	0		
	<ul style="list-style-type: none"> Case height 82 mm. 2 keys Dead-bolt and latch Inside steel rose item .06124.02.0 Pre-arranged for additional locking points Pair of threaded bushings (M8) item 1.06290.10.0 ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	70	1,100	12	1	57318	73	0		
	<ul style="list-style-type: none"> As above, keyed alike (KA) 1 key 	 1 00100 00 1	4	67	25	70	1,100	12	1	57318	72	0		
	<ul style="list-style-type: none"> Case height 82 mm. 2 keys Dead-bolt only Inside steel rose item 1.06124.02.0 Pre-arranged for extended bolts Pair of threaded bushings (M8) item 1.06290.10.0 ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0 	 1 00100 00 1	4		25	70	0,990	12	1	57336	70	0		
	<ul style="list-style-type: none"> Case height 78 mm. 2 keys Dead-bolt and latch Adjustable latch bolt Inside steel rose item 1.06124.02.0 ON REQUEST: Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	90	1,100	12	1	57353	90	0		

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.



- Case height 78 mm.
- 2 keys
- Dead-bolt and latch
- Adjustable latch
- Inside steel rose item 1.06124.02.0
- Pre-arranged for extended bolts
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded rods for fixing bushings and extended bolts
- ON REQUEST:
 Extended bolts item 1.06441.15.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Zinc plated steel striker item 1.06232.01.0



4 67 25 90 1,225 12


1 57358 90 0

- As above, keyed alike (KA)
- 1 key



4 67 25 90 1,225 12

1 57358 92 0




- Case height 78 mm.
- 2 keys
- Dead bolt only
- Inside steel rose item 1.06124.02.0
- Pre-arranged for extended bolts
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded rods for fixing bushings and extended bolts
- ON REQUEST:
 Extended bolts item 1.06441.15.0
 Extended bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0
 Zinc plated steel striker item 1.06232.00.0



4 25 90 1,096 12

1 57378 90 0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.




- Black nylon rose

02400

0,001

100

1 06002 00 0

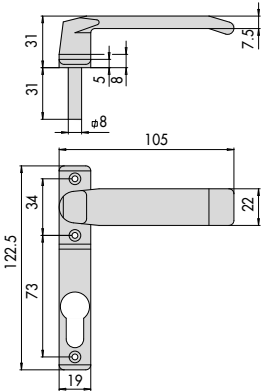


- Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks
- 3 fastening screws

46305

0,100

12

1 06003 00 0

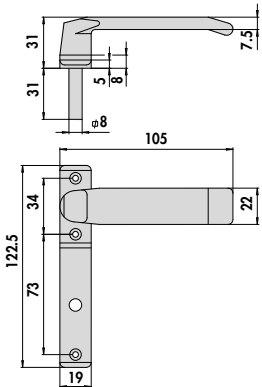


- Handle, in 20 % fiber glass reinforced black nylon, for use with locks series 46307
- 3 fixing screws

0,100

12

1 06003 01 0

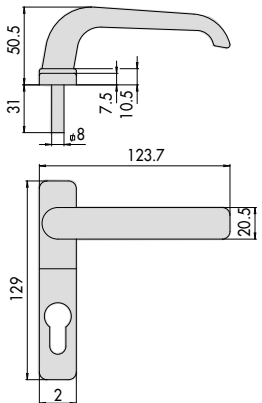

- Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks
- 3 fastening screws


46305

0,112

12


1 06004 00 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.




- Handle and edge cover in 20% fiber glass reinforced black nylon, for use with locks series 46307
- 3 fixing screws

0,120 12 1 06004 01 0




- Lock shutter accessory

0,100 12 1 06005 00 0



- Zinc plated steel rose

42012, 42022, 0,020 100 1 06075 00 0
 42032, 42112,
 42122, 42212,
 42312, 42412,
 42422, 42512,
 56013, 56016,
 56358



- Brass floor striker diameter 11 mm.
- FOR:
 extended bolts with rods diameter 10 mm.

1 06415 00 0, 0,016 12 1 06086 00 0
 1 06441 15 0,
 1 07088 03 0,
 1 07088 04 0,
 43090, 43190,
 43690, 46445,
 52526, 53131,
 53137, 53151,
 53157, 56255,
 57015, 57020,
 57033, 57215,
 57217, 57255,
 57265, 57296,
 57831, 57851,

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extended bolts with 8 mm. diameter rods multi-point locks series 46445 Extended bolt for Multitop item 1.06449.11.0 	1 06415 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57020, 57033, 57215, 57217, 57255, 57265, 57296, 57831, 57851	0,020	12	1	06086	02	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	16325, 42012, 42022, 42032, 42112, 42122, 42212, 42412, 42422, 42512, 43212, 46300, 46303, 46315, 46320, 46323, 46325, 46365, 46375	0,014	100	1	06092	00	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,043	12	1	06124	00	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,020	12	1	06124	02	0
	<ul style="list-style-type: none"> • Nylon rose, to be use for interchangeability with lock series 57300 		0,004	12	1	06141	56	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Noise proof bushes for bolts diameter 8.5 mm. (2 pieces) diameter 10 mm. (1 piece) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1	06147	00	0
	<ul style="list-style-type: none"> Zinc plated steel striker 	17353, 17358, 56013, 56016, 56358, 57013, 57016, 57030, 57035, 57223, 57226, 57333, 57336	0,055	25	1	06232	00	0
	<ul style="list-style-type: none"> Zinc plated steel striker 	56358, 57313, 57318, 57353, 57358, 57378	0,056	25	1	06232	01	0
	<ul style="list-style-type: none"> Zinc-plated steel faceplate 	46215, 46217, 46225, 46227, 46325, 46327	0,069	25	1	06232	20	0
	<ul style="list-style-type: none"> Zinc plated steel striker 	46300, 46302, 46303, 46305, 46307, 46320, 46322, 46323, 46365	0,056	25	1	06232	21	0
	<ul style="list-style-type: none"> Adjustable zinc-plated steel striker 2 fastening screws 	46305, 46307	0,038	25	1	06232	22	0
	<ul style="list-style-type: none"> Set of threaded bushes (M8) in metal 	1 06441 20 0, 16325, 17358, 46320, 46322, 46325, 46327, 56358, 57358, 57378	0,050	12	1	06290	05	0
	<ul style="list-style-type: none"> Pair of threaded steel bushings (M8), anti-unscrewing 	46300, 46302, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336	0,025	25	1	06290	10	0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 04 0	0,056	12	1 06291 00 0				
	<ul style="list-style-type: none"> • Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0 1 07088 04 0	0,054	12	1 06291 05 0				
	<ul style="list-style-type: none"> • Zinc plated steel pin connector 	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0 1 07088 04 0	0,016	12	1 06291 20 0				
	<ul style="list-style-type: none"> • Zinc plated hardened steel tip, dia. 14 mm 	1 07088 05 0	0,100	12	1 06291 07 0				
	<ul style="list-style-type: none"> • Plate complete with 2 M5 fixing screws for rolling shutters 	41510,41525, 41526	0,014	50	1 06316 00 0				
	<ul style="list-style-type: none"> • Zinc plated extended bolts • SUPPLIED AS STANDARD: • Pair of bolts dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces) 	52526,56016, 56255,57015, 57016,57019, 57033,57035, 57215,57217, 57225,57226, 57255,57256, 57265,57296, 57318,57336	0,533	12	1 06415 00 0				
	<ul style="list-style-type: none"> • Zinc plated extended bolts • SUPPLIED AS STANDARD: • Pair of bolts diameter 8 mm. • Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 	16325,17358, 46320,46322, 46325,46327, 56358,57358, 57378	0,530	12	1 06441 15 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Internal rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) 	06460, 06461, 06480, 06485	0,116	12	1	06473	00	0	
	<ul style="list-style-type: none"> • Nylon contact set complete with spacers: 2 mm. (Pcs. 4) 	11000, 12000, 13000	0,035	6	1	06510	00	0	
	<ul style="list-style-type: none"> • Zinc plated roller striker 	11721, 11731, 11921, 11931	0,183 0,182	6 6	1	07018	00	1 2	
	<ul style="list-style-type: none"> • Zinc plated striker 	11921, 11931	0,172 0,183	6 6	1	07018	00	3 4	
	<ul style="list-style-type: none"> • Striker set including: slide anchoring plate screws 	11610, 11630, 11921, 11931	0,100 0,100	1 1	1	07018	10	3 4	
	<ul style="list-style-type: none"> • Zinc plated roller striker 	11761, 11771	0,198 0,198	6 6	1	07020	00	1 2	
	<ul style="list-style-type: none"> • Striker 	1A721, 1A731	0,200	6	1	07021	00	0	

Type	Description	For series/item	Unit weight Pieces	ITEM					
				Type	Dim.	Hand	Fin.	Peris.	Spec.
	<ul style="list-style-type: none"> • 1 mm spacer for striker 	1A721, 1A731	0,025	6	1	07021	01	0	
	<ul style="list-style-type: none"> • Backplate for lock and striker to be welded 	1A721, 1A731	0,435	6	1	07021	05	0	
	<ul style="list-style-type: none"> • Coil set • 12V ac CE 	1A610, 1A611, 1A630, 1A631, 1A721, 1A731	0,092	6	1	07025	00	0	
	<ul style="list-style-type: none"> • Zinc plated steel protective box for outside cylinder 		0,200	10	1	07056	00	0	
TO BE DISCONTINUED									
	<ul style="list-style-type: none"> • Zinc plated steel floor striker 	11823	0,307	12	1	07058	00	0	
	<ul style="list-style-type: none"> • Protective back plate, striker spacer and zinc plated steel screws 	11721, 11726, 11731, 11736, 11761, 11771, 11921, 11931	0,645	20	1	07061	00	1	
			0,645	20	1	07061	00	2	
	<ul style="list-style-type: none"> • Protective back plate with zinc plated steel screws 	11823	0,525	20	1	07061	01	1	
TO BE DISCONTINUED									
	<ul style="list-style-type: none"> • Protective back plate, striker spacer and zinc plated steel screws 	50411, 50421, 50471, 50481, 50511, 50521, 50571, 50581	0,635	20	1	07061	10	0	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated extended bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 	16325, 17358, 46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378, 56358	0,600	12	1	07088	03	0	
	<ul style="list-style-type: none"> • Quick-lock internal extended bolts • SUPPLIED AS STANDARD: pair of 8 mm diameter bolts • Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 	46303, 46323	0,600	12	1	07088	04	0	
	<ul style="list-style-type: none"> • Quick-lock internal extended bolts • SUPPLIED AS STANDARD: pair of 8 mm diameter bolts • ON REQUEST: tip set (2 pcs) 	46303, 46323	0,430	12	1	07088	04	0 00 CG	
	<ul style="list-style-type: none"> • Zinc plated extended bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 14 mm. item 1.06291.07.0 (Pcs. 2) 	16325, 17358, 46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 56358, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,575	12	1	07088	05	0	

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris.
	<ul style="list-style-type: none"> • Coil set • 12 V ac • Black nylon support 	11610, 11611,	0,087	6	1	07118	00	1
		11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,087	6	1	07118	00	2
	<ul style="list-style-type: none"> • Coil set • 24 V ac • Black nylon support 	11610, 11611,	0,075	6	1	07118	01	1
		11630, 11631, 11670, 11671	0,082	6	1	07118	01	2
	<ul style="list-style-type: none"> • Adjustable coil set • 12 V ac • Blue nylon support 	11610, 11611,	0,075	6	1	07120	00	1
		11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,074	6	1	07120	00	2
	<ul style="list-style-type: none"> • Adjustable coil set • 24 V ac • Blue nylon support 	11610, 11611,	0,075	6	1	07120	01	1
		11630, 11631, 11670, 11671	0,075	6	1	07120	01	2
	<ul style="list-style-type: none"> • Set of coils • 12 V ac CE 	17352, 17353, 17357, 17358	0,035	6	1	07128	00	0

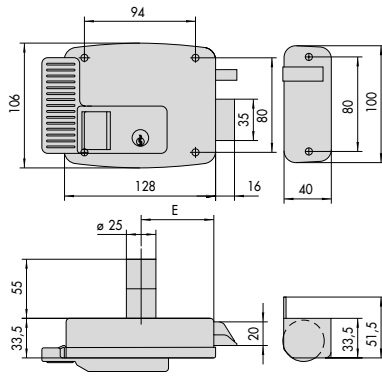


11721, 11731, 11921, 11931

E = 50 - 60 - 70 - 80

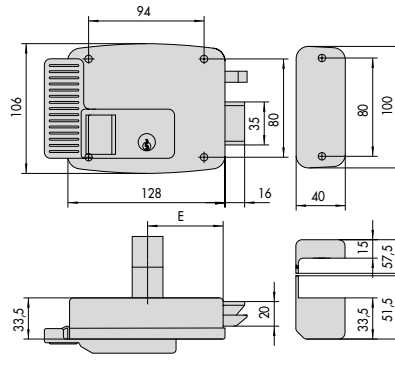

11921, 11926, 11931, 11936

E = 50 - 60 - 70 - 80

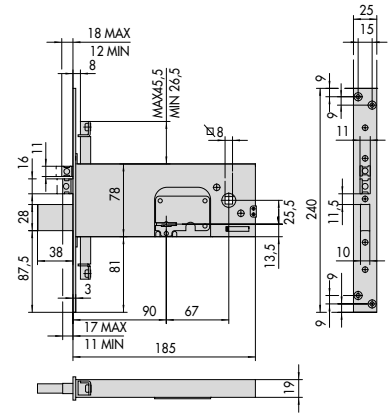


1.17358.90

1


4

7

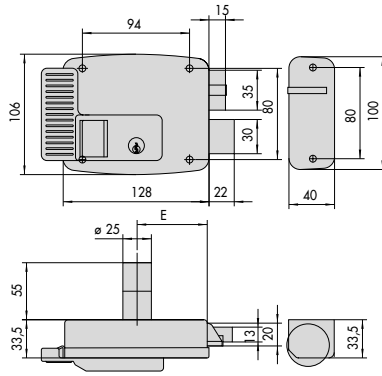


11761, 11771

E = 50 - 60 - 70 - 80

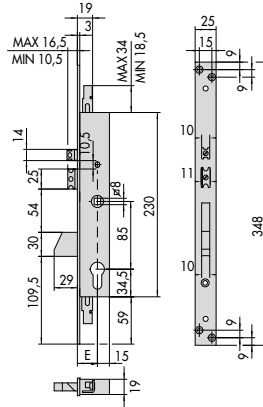

16325
E = 25 - 30 - 35

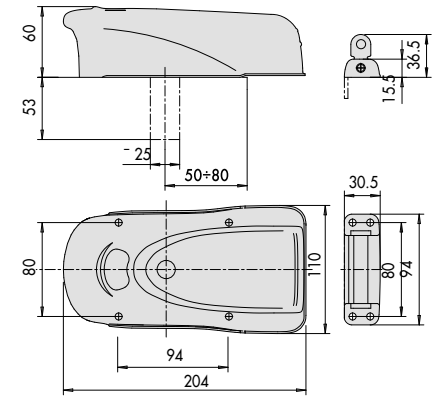


1A610, 1A611, 1A630, 1A631, 1A721, 1A731


2

5


8

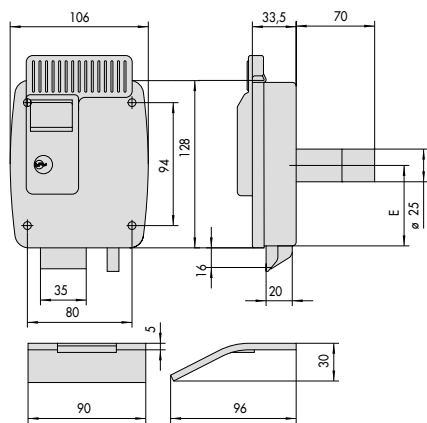

1.11823.80

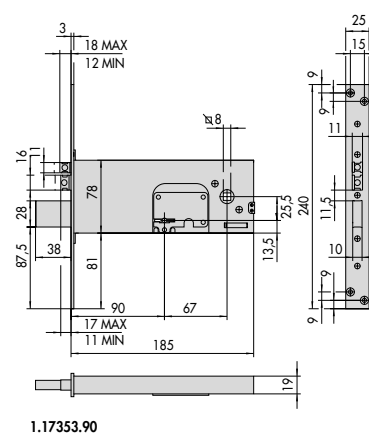

1.17353.90

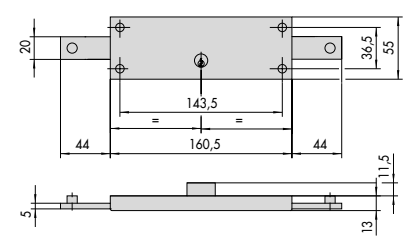


1.41010.80


3

6


9



1.41110.60, 1.41111.60




1.41600.00.0

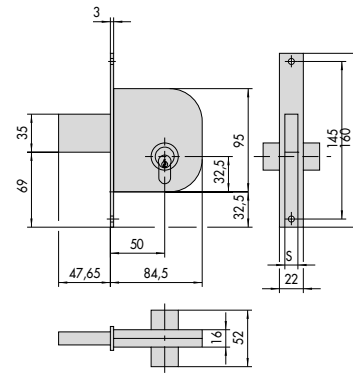

1.42010.50, 1.42012.50
1.42020.50, 1.42022.50


S
12
9

10

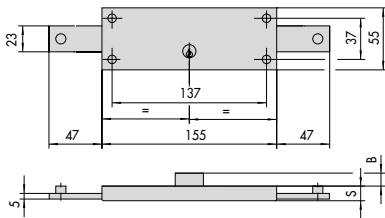


1.41210.78	S	B
1.41320.78	20	6,5
1.41410.78	17	9,5
1.41510.78	15	6
	15	5,5

13




1.41620.00.0

16

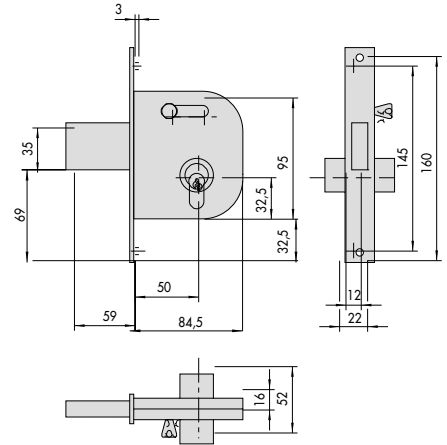


1.42030.50, 1.42032.50

11




1.41220.78	S	B	A	C
1.41221.78	20	6,5		
1.41230.78	20	6,5		
1.41231.78	20	6,5		
1.41310.78	17	9,5		
1.41311.78	17	9,5		
1.41420.78	15	6		
1.41421.78	15	8,5		
1.41525.78	15	5,5	5	31
1.41526.78	15	5,5	5	31

14

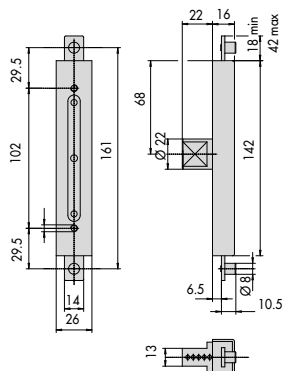

1.41650.00.0

17

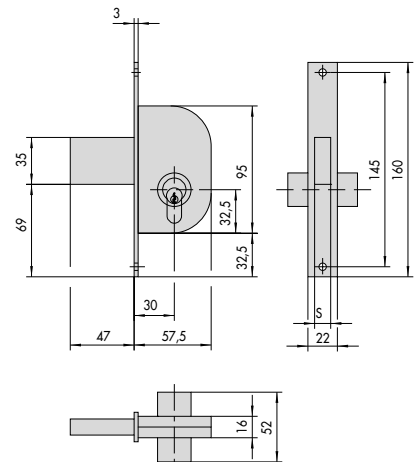


1.42110.30, 1.42112.30
1.42120.30, 1.42122.30

S
12
9

12


15

18

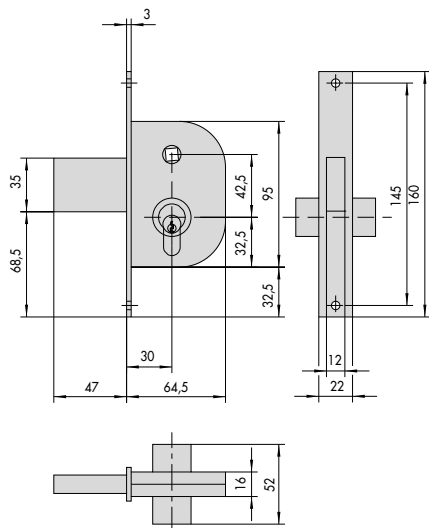


1.42210.30, 1.42212.30

19

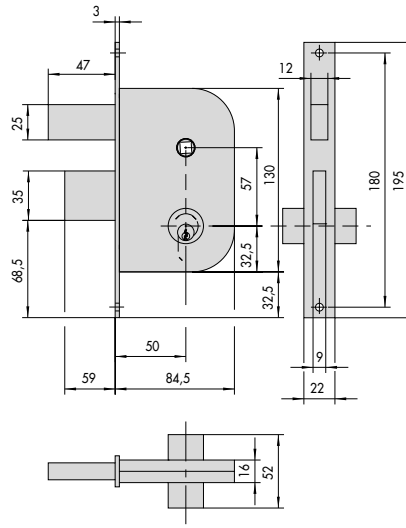


1.42510.50, 1.42512.50

22

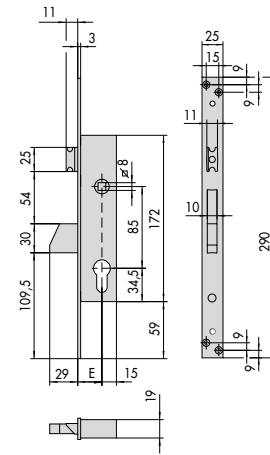


46315
E = 25 - 30 - 35

25

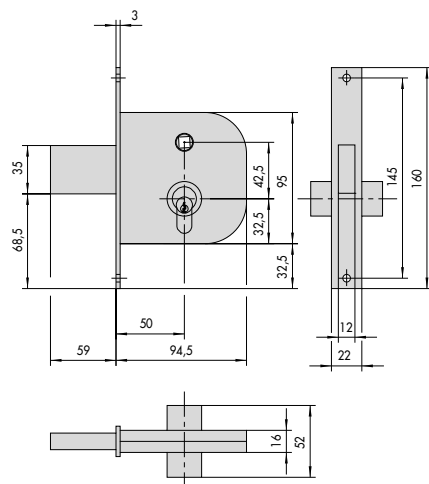


1.42310.50, 1.42312.50

20

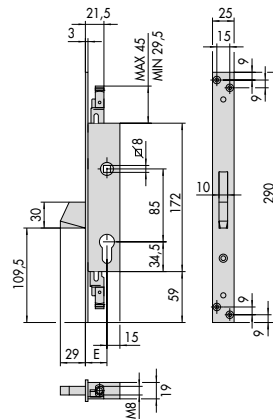


46300, 46302, 46303
E = 25 - 30 - 35

23

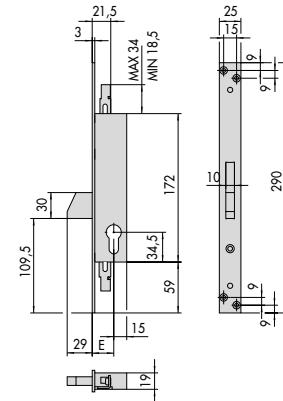


46320, 46322, 46323
E = 25 - 30 - 35

26

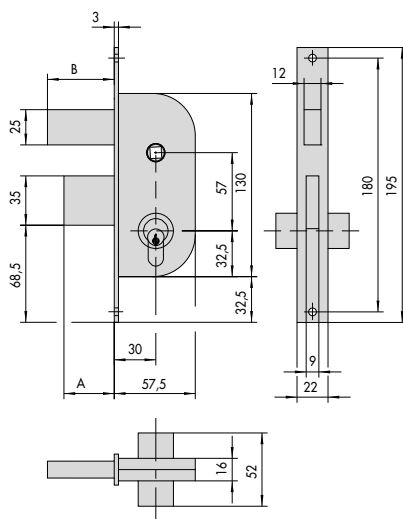


	A	B
1.42410.30, 1.42412.30	47	47
1.42420.30, 1.42422.30	28	24

21

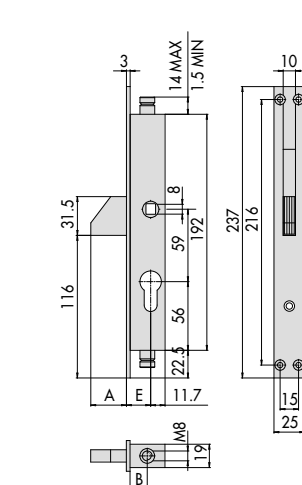


	E	A	B
1.46305.19.0	19,7	29	14
1.46305.25.0	25,7	23	20
1.46305.30.0	31,7	22	26,5
1.46307.19.0	19,7	29	14
1.46307.25.0	25,7	23	20

24

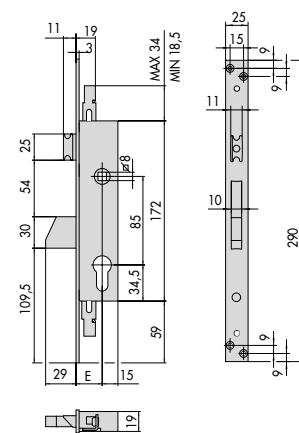


46325, 46327
E = 25 - 30 - 35


27

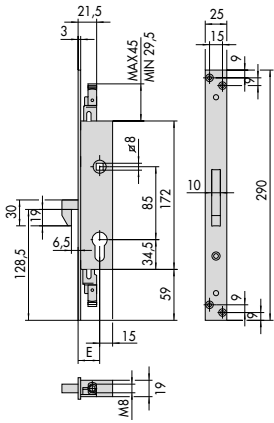

46365
E = 25 - 30 - 35

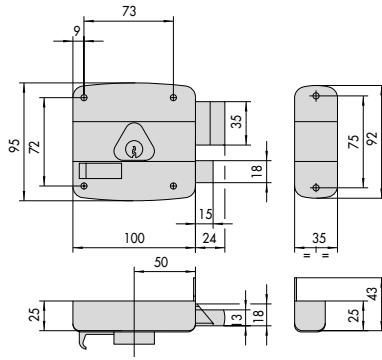

1.50461.50

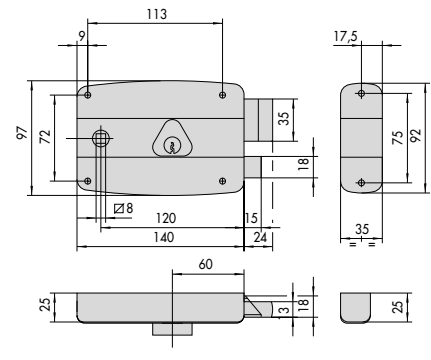


1.50571.60


28

31


34

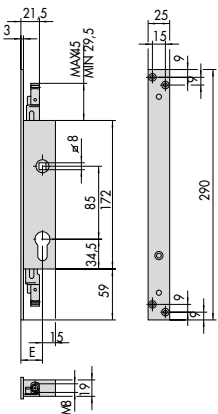

46375
E = 25 - 30 - 35

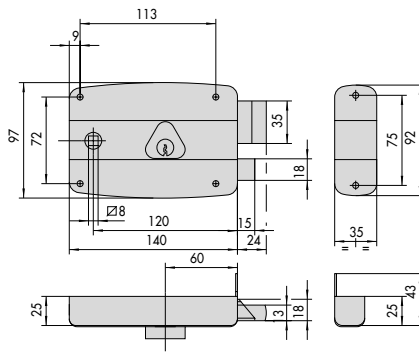

1.50171.60, 1.50471.60, 1.50481.60




55254, 55274


29

32


35

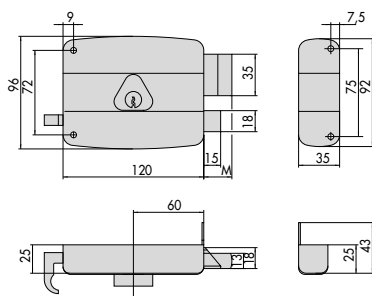

1.50421.60

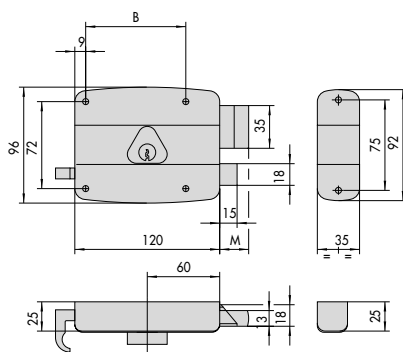

1.50521.60

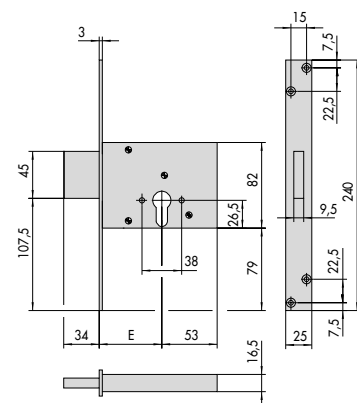


56013
E = 52 - 60 - 70


30

33


36

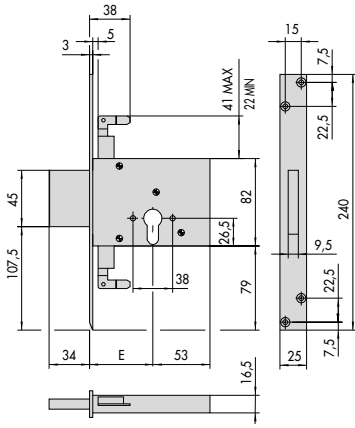

56016
E = 60 - 70

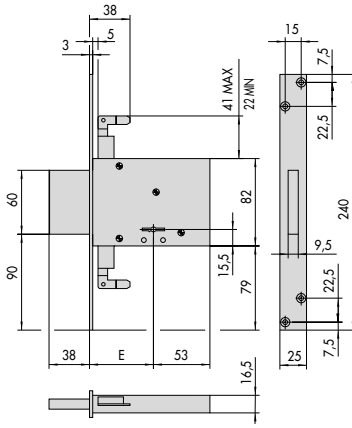


57016
E = 60 - 70

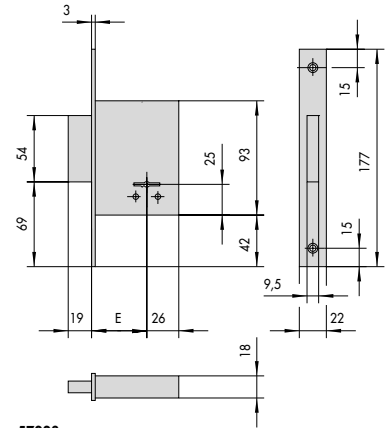


57223
E = 40 - 45 - 50 - 60

37

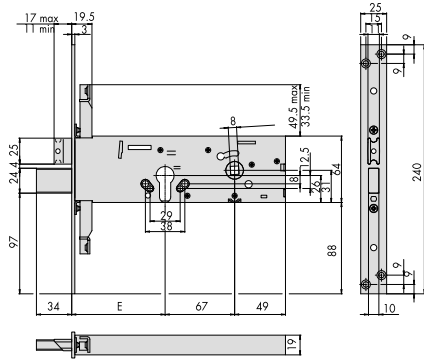


56358
E = 90

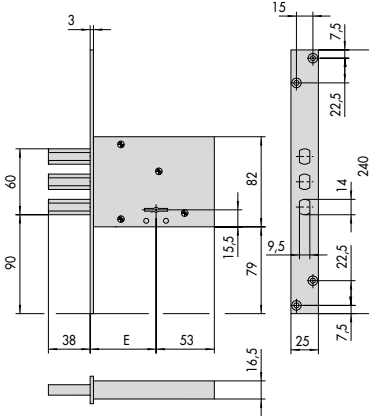


57030
E = 60 - 70

40

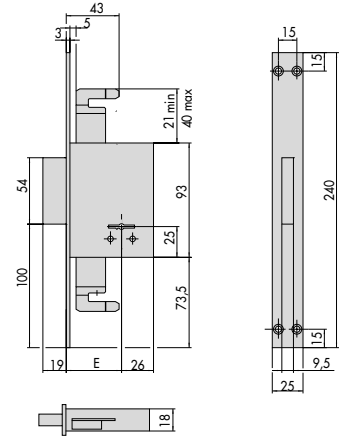


57226
E = 45 - 50 - 60

38

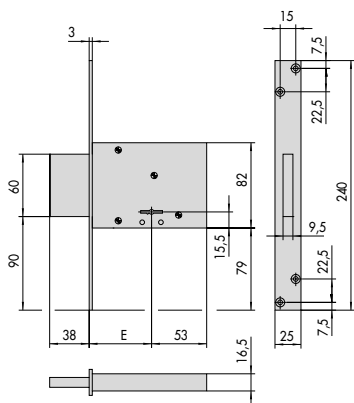


57013
E = 52 - 60 - 70

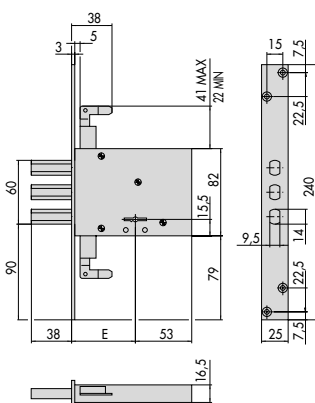

57035
E = 60 - 70

41

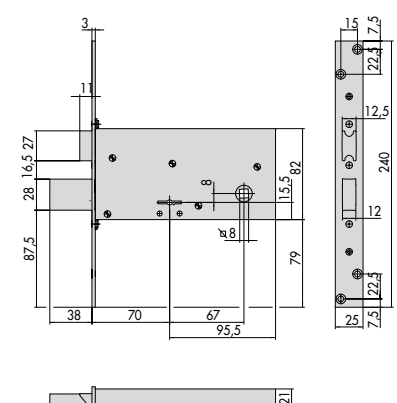


57313


39

42

45

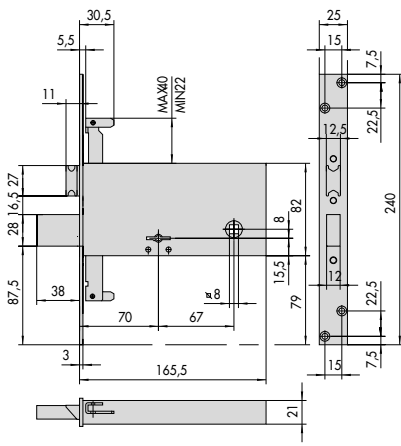


57318

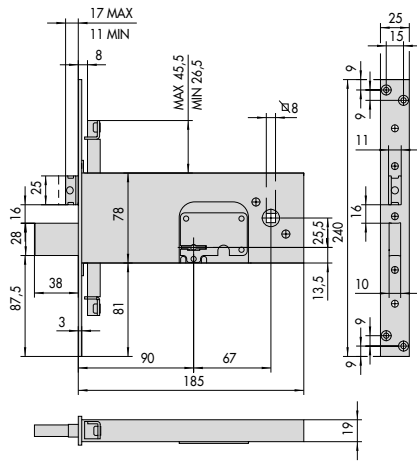

57358, 57378


46

49

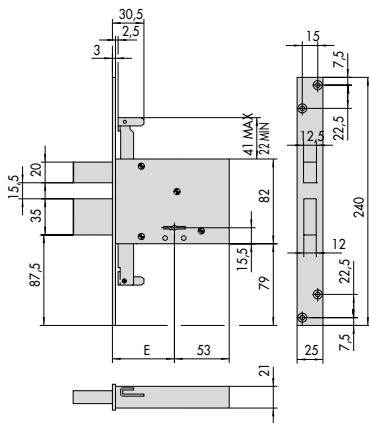

1.57336.70

47

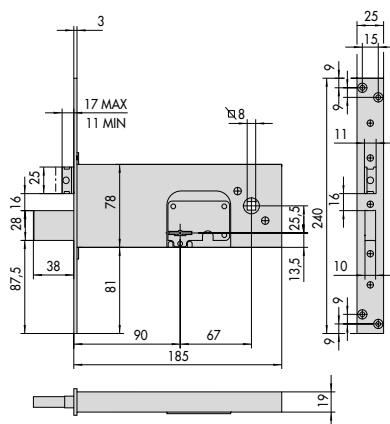

1.57353.90

48



Locks for aluminium doors



Cylinder mortice locks, mid-rail type H = 82 mm	179
Cylinder mortice locks, mid-rail type H = 44-64-77 mm	181
Oval shaped cylinder mortice locks	184
Euro profile cylinder mortice locks	187
Cylinder mortice locks for shutters	189
Cylinder mortice locks with swing bolt	190
Cylinder multipoint mortice locks with swing bolt	195
Cylinder gear mortice locks	201
Cylinder multipoint gear mortice locks	203

Cylinder mortice locks mid-rail type H=64 mm.....	211
Double-bit key mortice locks, mid-rail type E = 70 mm.....	212
Double-bit key mortice locks, mid-rail type B = 90-100 mm.....	214
Electric strikers for mortice locks.....	217
Kits for additional locking points	219
Accessories for aluminium locks	223
Adjustable metal striking plates	234
Nylon striking plates	240
Dimensional drawings	255





Technical features:

- Case height 82 mm
- Zinc plated case
- Zinc plated faceplate
- Brass latch, roller and bolt
- Electrical versions are interchangeable with item 44115/6 and item 44145/6
- Current absorption 1,3 A
- Voltage 12 V ac CE

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet (if this is provided for)

On request:

- Specific striking plates (see Vademecum)
- Mechanical control button item 1.06110.10.0

Hand:

0 = Non-handed




1 = R.H. inwards

2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin. Pars. Spec.	
	• Dead-locking latch	48	16	58	0,530	12	1	14010	60	1		
		48	16	58	0,530	12	1	14010	60	2		
		48	20	58	0,550	12	1	14011	60	1		
		48	20	58	0,565	12	1	14011	60	2		
	• Dead-locking latch • Hold-open latch	48	16	58	0,556	12	1	14012	60	1		
		48	16	58	0,556	12	1	14012	60	2		
	• Dead-locking latch • Low impact piston spring • Hold-open latch	48	16	58	0,557	12	1	14017	60	1		
		48	16	58	0,557	12	1	14017	60	2		
		• Dead-bolt only	2	16	58	0,485	12	1	44110	60	0	
			2	20	58	0,485	12	1	44111	60	0	
		• Dead-bolt only • Interchangeable with 14010 series	2	16	58	0,475	12	1	44115	60	0	
			2	20	58	0,485	12	1	44116	60	0	
	• Dead-bolt and non-handed latch	2	48	16	58	0,553	12	1	44120	60	0	
		2	48	20	58	0,570	12	1	44121	60	0	

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim. Hand	Fin.	Pers. Spec.	
 <ul style="list-style-type: none"> • Dead-bolt and adjustable roller 		2	16	58	0,517	12	1	44130	60	0	
		2	20	58	0,530	12	1	44131	60	0	
 <ul style="list-style-type: none"> • Non-handed latch-bolt • Latch-bolt with incorporated dead-bolt 		1	48	16	58	0,500	12	1	44140	60	0
		1	48	20	58	0,510	12	1	44141	60	0
 <ul style="list-style-type: none"> • Non-handed latch-bolt • Latch-bolt with incorporated dead-bolt • Interchangeable with series 14010 		1	48	16	58	0,500	12	1	44145	60	0
		1	48	20	58	0,515	12	1	44146	60	0



Technical features:

- Zinc plated case
- Zinc plated faceplate
- Brass latch, roller and dead-bolt
- Latch or reversible latch/bolt (where this is provided for)
- Electrical and mechanical versions are interchangeable
- Current absorption 3,1 A
- Voltage 12 V ac CE

Hand:

0 = Non-handed

Cylinder to be ordered separately








Supplied as standard:

- Cylinder fixing screws
- Instruction sheet

On request:

- Specific striking plates (see Vademecum)
- Mechanical control button item 1.06110.10.0 (electrical versions)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Pars. Spec.
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 	67	16	70	0,560	12	1	14350	70	0	
		67	16	80	0,595	12	1	14350	80	0	
		67	16	90	0,627	12	1	14350	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 	67	20	70	0,580	12	1	14351	70	0	
		67	20	80	0,633	12	1	14351	80	0	
		67	20	90	0,643	12	1	14351	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin 	67	14	70	0,576	12	1	14352	70	0	
		67	14	80	0,608	12	1	14352	80	0	
		<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 	67	16	70	0,562	12	1	14450	70	0
67			16	80	0,594	12	1	14450	80	0	
67			16	90	0,629	12	1	14450	90	0	
<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 		67	20	70	0,580	12	1	14451	70	0	
		67	20	80	0,608	12	1	14451	80	0	
		67	20	90	0,645	12	1	14451	90	0	
<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin 		67	14	70	0,577	12	1	14452	70	0	
		67	14	80	0,609	12	1	14452	80	0	
		<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and dead-bolt 	2	67	16	70	0,612	12	1	14460	70
	2		67	16	80	0,656	12	1	14460	80	0
	2		67	16	90	0,709	12	1	14460	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and dead-bolt 	2	67	20	70	0,627	12	1	14461	70	0
		2	67	20	80	0,665	12	1	14461	80	0
		2	67	20	90	0,722	12	1	14461	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and dead-bolt • 4.5 mm. extra protruding latch, pin and dead-bolt 	2	67	14	70	0,624	12	1	14462	70	0
		2	67	14	80	0,670	12	1	14462	80	0
	2	67	14	90	0,721	12	1	14462	90	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
 <ul style="list-style-type: none"> • Case height 64 mm. • Dead-locking latch only • Hold-open latch 		67	16	70	0,547	12	1	14510	70	0			
		67	16	80	0,580	12	1	14510	80	0			
		67	16	90	0,600	12	1	14510	90	0			
		67	20	70	0,564	12	1	14511	70	0			
		67	20	80	0,580	12	1	14511	80	0			
		67	20	90	0,600	12	1	14511	90	0			
		67	14	70	0,554	12	1	14512	70	0			
		67	14	80	0,580	12	1	14512	80	0			
		67	14	90	0,600	12	1	14512	90	0			
		• Case height 64 mm.											
		• Dead-locking latch only											
		• Hold-open latch											
 <ul style="list-style-type: none"> • Case height 44 mm. • Latch with incorporated dead-bolt 		1	67	16	60	0,400	12	1	44150	60	0		
		2	67	16	70	0,415	12	1	44150	70	0		
		2	67	16	80	0,445	12	1	44150	80	0		
		2	67	16	90	0,470	12	1	44150	90	0		
		• Case height 44 mm.											
		• Latch with incorporated dead-bolt											
		1	67	20	60	0,423	12	1	44151	60	0		
		2	67	20	70	0,445	12	1	44151	70	0		
		2	67	20	80	0,460	12	1	44151	80	0		
		2	67	20	90	0,490	12	1	44151	90	0		
		• Case height 44 mm.											
		• 4.5 mm. extra protruding latch with incorporated dead-bolt											
	2	67	14	70	0,438	12	1	44152	70	0			
	2	67	14	80	0,455	12	1	44152	80	0			
	2	67	14	90	0,475	12	1	44152	90	0			
 <ul style="list-style-type: none"> • Case height 64 mm. • Latch with incorporated dead-bolt 		1	67	16	60	0,521	12	1	44155	60	0		
		2	67	16	70	0,550	12	1	44155	70	0		
		2	67	16	80	0,570	12	1	44155	80	0		
		2	67	16	90	0,590	12	1	44155	90	0		
		• Case height 64 mm.											
		• Latch with incorporated dead-bolt											
		1	67	20	60	0,531	12	1	44156	60	0		
		2	67	20	70	0,576	12	1	44156	70	0		
		2	67	20	80	0,590	12	1	44156	80	0		
		2	67	20	90	0,610	12	1	44156	90	0		
	 <ul style="list-style-type: none"> • Case height 44 mm. • Adjustable roller with incorporated dead-bolt 		1	16	60	0,384	12	1	44160	60	0		
			2	16	70	0,413	12	1	44160	70	0		
		2	16	80	0,450	12	1	44160	80	0			
		2	16	90	0,470	12	1	44160	90	0			
		• Case height 44 mm.											
		• Adjustable roller with incorporated dead-bolt											
		1	20	60	0,404	12	1	44161	60	0			
		2	20	70	0,420	12	1	44161	70	0			
		2	20	80	0,450	12	1	44161	80	0			
		2	20	90	0,470	12	1	44161	90	0			
 <ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 			2	16	70	0,521	12	1	44350	70	0		
			2	20	70	0,529	12	1	44351	70	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 	2	16	70	0,516	12	1	44450	70	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 	2	20	70	0,533	12	1	44451	70	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch • Latch bolt is withdrawn by the handle 	2	67	16	70	0,590	12	1	44360	70	0
		2	67	16	80	0,598	12	1	44360	80	0
		2	67	16	90	0,621	12	1	44360	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch • Latch bolt is withdrawn by the handle 	2	67	20	70	0,585	12	1	44361	70	0
		2	67	20	80	0,609	12	1	44361	80	0
		2	67	20	90	0,641	12	1	44361	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • 4.5 mm. extra protruding dead-bolt and latch • Latch bolt is withdrawn by the handle 	2	67	14	70	0,582	12	1	44362	70	0
		2	67	14	80	0,613	12	1	44362	80	0
		2	67	14	90	0,642	12	1	44362	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch 	2	67	16	70	0,568	12	1	44460	70	0
		2	67	16	80	0,590	12	1	44460	80	0
		2	67	16	90	0,628	12	1	44460	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch 	2	67	20	70	0,583	12	1	44461	70	0
		2	67	20	80	0,611	12	1	44461	80	0
		2	67	20	90	0,630	12	1	44461	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • 4.5 mm. extra protruding dead-bolt and latch 	2	67	14	70	0,587	12	1	44462	70	0
		2	67	14	80	0,605	12	1	44462	80	0
		2	67	14	90	0,639	12	1	44462	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	16	70	0,576	12	1	44370	70	0	
		2	16	80	0,579	12	1	44370	80	0	
		2	16	90	0,610	12	1	44370	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	20	70	0,568	12	1	44371	70	0	
		2	20	80	0,590	12	1	44371	80	0	
		2	20	90	0,624	12	1	44371	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	16	70	0,542	12	1	44470	70	0	
		2	16	80	0,583	12	1	44470	80	0	
		2	16	90	0,607	12	1	44470	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	20	70	0,559	12	1	44471	70	0	
		2	20	80	0,601	12	1	44471	80	0	
		2	20	90	0,620	12	1	44471	90	0	



Technical features:

- Zinc plated case
- Zinc plated faceplate
- Brass latch, roller and bolt
- Current absorption 1,4 A
- Voltage 12 V ac CE

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet (if this is provided for)

On request:

- Specific striking plates (see Vademecum)

Hand:

0 = Non-handed








1 = R.H. inwards

2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-locking latch	16	15	0,360	1	1	14020	15	1			
		16	15	0,355	1	1	14020	15	2			
		16	18	0,371	1	1	14020	18	1			
		16	18	0,365	1	1	14020	18	2			
	• Dead-locking latch	20	15	0,381	1	1	14021	15	1			
		20	15	0,381	1	1	14021	15	2			
		20	18	0,394	1	1	14021	18	1			
		20	18	0,394	1	1	14021	18	2			
	• Nickel-plated faceplate • Nickel-plated dead-bolt only • Nickel-plated steel flat striker item 1.07027.00.0	1	20	16	0,265	12	1	44210	16	0		
	• Case height 85 mm. • Cylinder activated non-handed latch	16	15	0,140	12	1	44217	15	0			
	• Case height 85 mm. • Cylinder activated non-handed latch	20	15	0,150	12	1	44218	15	0			
	• 4.5 mm. extra protruding dead-bolt and non-handed latch • Latch can be activated by key	1	69	14	25	0,365	12	1	44219	25	0	
		1	69	14	30	0,410	12	1	44219	30	0	
	• Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18	1	69	16	15	0,290	12	1	44220	15	0	
		1	69	16	18	0,310	12	1	44220	18	0	
		1	69	16	25	0,350	12	1	44220	25	0	
		1	69	16	30	0,390	12	1	44220	30	0	
		1	69	16	35	0,425	12	1	44220	35	0	
	• Dead-bolt and non-handed latch • Latch can be activated by key	1	69	14,7	35	0,450	12	1	44220	35	0 00 EN	
	• Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18	1	69	20	15	0,305	12	1	44221	15	0	
		1	69	20	18	0,328	12	1	44221	18	0	
		1	69	20	25	0,360	12	1	44221	25	0	
		1	69	20	30	0,405	12	1	44221	30	0	
		1	69	20	35	0,430	12	1	44221	35	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM						
								Type	Dim. Hand	Fin.	Pers. Spec.			
	<ul style="list-style-type: none"> • 4.5 mm. extra protruding dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=25 	2	69	14	25	0,390	12	1	44224	25	0			
		2	69	14	30	0,434	12	1	44224	30	0			
	<ul style="list-style-type: none"> • Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25 	2	69	16	15	0,318	12	1	44225	15	0			
		2	69	16	18	0,335	12	1	44225	18	0			
		2	69	16	25	0,374	12	1	44225	25	0			
		2	69	16	30	0,416	12	1	44225	30	0			
		2	69	16	35	0,454	12	1	44225	35	0			
		2	69	14	35	0,450	12	1	44225	35	0	00	EN	
	<ul style="list-style-type: none"> • ABITHAL PROFILE ROUND VERSION • Dead-bolt and non-handed latch • Latch can be activated by key 													
		<ul style="list-style-type: none"> • Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25 	2	69	20	15	0,336	12	1	44226	15	0		
			2	69	20	18	0,355	12	1	44226	18	0		
			2	69	20	25	0,385	12	1	44226	25	0		
			2	69	20	30	0,433	12	1	44226	30	0		
	2		69	20	35	0,465	12	1	44226	35	0			
	<ul style="list-style-type: none"> • Case height 85 mm. • Handle activated non-handed latch 													
	<ul style="list-style-type: none"> • Case height 85 mm. • Handle activated non-handed latch 													
	<ul style="list-style-type: none"> • Adjustable dead-bolt and roller 	1	16	15	0,265	12	1	44230	15	0				
		1	16	18	0,292	12	1	44230	18	0				
		1	16	25	0,340	12	1	44230	25	0				
		1	16	30	0,375	12	1	44230	30	0				
		1	16	35	0,408	12	1	44230	35	0				
		1	16	35	0,408	12	1	44230	35	0				
	<ul style="list-style-type: none"> • Adjustable dead-bolt and roller 													
		1	20	15	0,293	12	1	44231	15	0				
		1	20	18	0,313	12	1	44231	18	0				
		1	20	25	0,359	12	1	44231	25	0				
		1	20	30	0,391	12	1	44231	30	0				
		1	20	30	0,391	12	1	44231	30	0				
		1	20	35	0,426	12	1	44231	35	0				
		1	20	35	0,426	12	1	44231	35	0				
	<ul style="list-style-type: none"> • Adjustable dead-bolt and roller 	2	16	15	0,300	12	1	44235	15	0				
		2	16	18	0,320	12	1	44235	18	0				
		2	16	25	0,366	12	1	44235	25	0				
		2	16	30	0,398	12	1	44235	30	0				
		2	16	35	0,434	12	1	44235	35	0				
		2	16	35	0,434	12	1	44235	35	0				
	<ul style="list-style-type: none"> • Adjustable dead-bolt and roller 													
		2	20	18	0,340	12	1	44236	18	0				
		2	20	25	0,415	12	1	44236	25	0				
		2	20	30	0,419	12	1	44236	30	0				
	<ul style="list-style-type: none"> • Case height 70 mm. • Adjustable roller 													
	<ul style="list-style-type: none"> • Case height 70 mm. • Adjustable roller 													

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Dead-bolt only	1	16	15	0,180	12	1	44240	15	0		
		1	16	18	0,199	12	1	44240	18	0		
		1	16	25	0,234	12	1	44240	25	0		
		1	16	30	0,261	12	1	44240	30	0		
		1	16	35	0,290	12	1	44240	35	0		
	• Dead-bolt only	1	20	15	0,195	12	1	44241	15	0		
		1	20	18	0,211	12	1	44241	18	0		
		1	20	25	0,246	12	1	44241	25	0		
		1	20	30	0,273	12	1	44241	30	0		
		1	20	35	0,300	12	1	44241	35	0		
	• Dead bolt only (without protrusion)	2	20	15	0,175	12	1	44242	15	0		
		• Dead-bolt only	2	16	15	0,210	12	1	44245	15	0	
			2	16	18	0,225	12	1	44245	18	0	
			2	16	25	0,256	12	1	44245	25	0	
			2	16	30	0,286	12	1	44245	30	0	
2			16	35	0,315	12	1	44245	35	0		
• Dead-bolt only		2	20	15	0,220	12	1	44246	15	0		
		2	20	18	0,239	12	1	44246	18	0		
		2	20	25	0,274	12	1	44246	25	0		
		2	20	30	0,300	12	1	44246	30	0		
		2	20	35	0,329	12	1	44246	35	0		
	• Nickle-plated laminar steel	1	20	16	0,255	12	1	45010	16	0		
	• Zinc plated steel flat striker item 1.07028.00.0											
	• Nickel-plated laminated steel hook with throw	1	20	16	0,260	12	1	45012	16	0		
	• Nickel-plated steel guide pin • Zinc plated steel flat striker item 1.07028.05.0											
	• Nickel-plated laminated steel hook with latch bolt	1	20	16	0,260	12	1	45027	16	0		
	• Dead locking latch • Nickel-plated steel guide pin • Zinc plated steel flat striker item 1.07028.05.0											



Technical features:

- Zinc-plated case
- Zinc-plated stainless steel faceplate (fin.20)
- Nickel-plated roller and deadbolt
- Nickel-plated reversible latch
- Adjustable latch (44660, 44670, 44680 series)
- Aligned deadbolt 10mm thick
- Case cover to protect against dirt and chips

Hand:

0 = Non-handed

Cylinder to be ordered separately



Supplied as standard:

- Cylinder fixing screws
- Instruction sheet

On request:

- Specific striking plates (see Vademecum)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Adjustable latch bolt 10÷16 mm
- Zinc-plated faceplate 22x3

1	85	22	21	0,400	1	1	44650	20	0		
1	85	22	25	0,430	1	1	44650	25	0		
1	85	22	30	0,460	1	1	44650	30	0		
1	85	22	35	0,450	1	1	44650	35	0		

- Adjustable latch bolt 10÷16 mm
- Stainless steel faceplate 22x3

1	85	22	21	0,400	1	1	44650	20	0	20	
1	85	22	25	0,430	1	1	44650	25	0	20	
1	85	22	30	0,460	1	1	44650	30	0	20	
1	85	22	35	0,490	1	1	44650	35	0	20	



REPLACING 44620 SERIES

- Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm)
- Zinc-plated faceplate 22x3

1	85	22	21	0,407	1	1	44660	20	0		
1	85	22	25	0,431	1	1	44660	25	0		
1	85	22	30	0,470	1	1	44660	30	0		
1	85	22	35	0,505	1	1	44660	35	0		

- Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm)
- Stainless steel faceplate 22x3

1	85	22	21	0,407	1	1	44660	20	0	20	
1	85	22	25	0,431	1	1	44660	25	0	20	
1	85	22	30	0,470	1	1	44660	30	0	20	
1	85	22	35	0,505	1	1	44660	35	0	20	



REPLACING 44625 SERIES

- Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm)
- Zinc-plated faceplate 22x3

2	85	22	21	0,420	1	1	44665	20	0		
2	85	22	25	0,446	1	1	44665	25	0		
2	85	22	30	0,486	1	1	44665	30	0		
2	85	22	35	0,518	1	1	44665	35	0		




REPLACING 44630 SERIES

- Deadbolt and 2.5÷14.5 mm adjustable latch
- Zinc-plated faceplate 22x3

1	22	21	0,368	1	1	44670	20	0			
1	22	25	0,394	1	1	44670	25	0			
1	22	30	0,470	1	1	44670	30	0			
1	22	35	0,463	1	1	44670	35	0			


Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



REPLACING 44640 SERIES


- Latch only
- Zinc-plated faceplate 22x3

1	22	21	0,334	1	1	44680 20 0
1	22	25	0,357	1	1	44680 25 0
1	22	30	0,396	1	1	44680 30 0
1	22	35	0,435	1	1	44680 35 0



- Zinc-plated steel faceplate
- Laminated steel hook bolt
- Zinc-plated steel flat strike plate item.1.07028.00.0

1	20	30	0,315	1	1	45110 30 0
1	20	35	0,325	1	1	45110 35 0
1	20	40	0,330	1	1	45110 40 0
1	20	45	0,365	1	1	45110 45 0
1	20	50	0,370	1	1	45110 50 0
1	20	60	0,405	1	1	45110 60 0



- Brass faceplate
- Laminated steel hook bolt
- Brass flat strike plate item 1.07028.10.0
- ON REQUEST:
Fin. 12 (nickel-plated)

1	20	30	0,315	1	1	45100 30 0
1	20	35	0,325	1	1	45100 35 0
1	20	40	0,330	1	1	45100 40 0
1	20	45	0,365	1	1	45100 45 0
1	20	50	0,370	1	1	45100 50 0
1	20	60	0,405	1	1	45100 60 0



Technical features:

- Zinc plated steel case.
- Stainless steel faceplate
- Can be fitted with additional locking points
- Spindle for operating the dead-bolt and reloading pins, which can be locked by key

Hand:
0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Set of nylon roses item 1.06012.01.0
- Set of faceplate spacers item 1.06141.65.0
- Threaded pins for fixing the extended bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:


- Specific striking plates (see Vademecum)
- Cylinder protective rose item 1.06460.00.0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Nickel-plated dead-bolt
- ON REQUEST:
Cross-key cylinder item 1.02400.10.0
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,620	12	1	46200	25	0		
1	85	22	30	0,640	12	1	46200	30	0		
1	85	22	35	0,610	12	1	46200	35	0		



- Nickel-plated hook
- Stainless steel striking plate item 1.06459.01.0
- ON REQUEST:
Cross-key cylinder item 1.02400.10.0
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,650	12	1	46265	25	0		
1	85	22	30	0,670	12	1	46265	30	0		
1	85	22	35	0,693	12	1	46265	35	0		



- No frontal closure
- ON REQUEST:
Cross-key cylinder item 1.02400.10.0
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

	85	22	25	0,570	12	1	46275	25	0		
	85	22	30	0,540	12	1	46275	30	0		
	85	22	35	0,560	12	1	46275	35	0		



Technical features:

- Zinc plated steel case
- Stainless steel faceplate
- Nickel-plated latch, roller, bolt and hook bolt
- Latch or reversible latch/bolt (if this is provided for)
- Current absorption 3,1A
- Voltage 12 V ac CE

Supplied as standard:

- Set of faceplate spacers item 1.06141.65.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- Cylinder protective rose item 1.06460.00.0
- Cylinder with pin key series 02400
- Mechanical control button item 1.06110.10.0
- Threaded bushing item 1.06290.05 for extended bolts

Certification:


- This lock series is certified according to the European standard EN 12209:03 - Security class 3 (500 Kg side thrust and 400 Kg front thrust resistance)
- Suitable for doors certified to EN1627:2011 up to WK/RC 2 resistance class

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0

85	22	25	0,746	1	1	16205 25 0
85	22	30	0,770	1	1	16205 30 0
85	22	35	0,815	1	1	16205 35 0



- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0


1	85	22	25	0,780	1	1	16215 25 0
1	85	22	30	0,825	1	1	16215 30 0
1	85	22	35	0,865	1	1	16215 35 0



- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06002.00.0


1	85	22	25	0,889	1	1	16217 25 0
1	85	22	30	0,935	1	1	16217 30 0
1	85	22	35	0,970	1	1	16217 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Deadbolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- Pre-arranged for additional locking points
- Threaded pivots for fixing extended bolts
- 12 V ac SON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
Pair of external bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,845	1	1	16225 25 0
1	85	22	30	0,890	1	1	16225 30 0
1	85	22	35	0,935	1	1	16225 35 0




- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,935	1	1	16227 25 0
1	85	22	30	0,996	1	1	16227 30 0
1	85	22	35	1,041	1	1	16227 35 0



- Dead-bolt only
- Set of nylon roses item 1.06012.01.0
- AS ABOVE
- U-shaped faceplate 24x5 mm
- Pair of spacers 3 and 5 mm


1	22	25	0,545	12	1	46210 25 0
1	22	30	0,575	12	1	46210 30 0
1	22	35	0,560	12	1	46210 35 0
1	24	25	0,550	12	1	46213 25 0
1	24	30	0,570	12	1	46213 30 0
1	24	35	0,590	12	1	46213 35 0



- Cross-key cylinder with 3 keys
- Dead-bolt only
- Set of nylon roses item 1.06002.00.0


1	22	25	0,650	12	1	46212 25 0
1	22	30	0,670	12	1	46212 30 0
1	22	35	0,690	12	1	46212 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt only
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	22	25	0,600	12	1	46220 25 0
1	22	30	0,620	12	1	46220 30 0
1	22	35	0,650	12	1	46220 35 0




- Cross-key cylinder with 3 keys
- Dead-bolt only
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	22	25	0,695	12	1	46222 25 0
1	22	30	0,690	12	1	46222 30 0
1	22	35	0,710	12	1	46222 35 0



- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- Set of nylon roses item 1.06012.01.0
- ON REQUEST: (SERIES 46215):
Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. VV)
- AS ABOVE
- U-shaped faceplate 24x5 mm
- Pair of spacers 3 and 5 mm


1	85	22	25	0,610	12	1	46215 25 0
1	85	22	30	0,630	12	1	46215 30 0
1	85	22	35	0,660	12	1	46215 35 0
1	92	22	25	0,610	12	1	46219 25 0
1	92	22	30	0,616	12	1	46219 30 0
1	92	22	35	0,670	12	1	46219 35 0
1	92	24	25	0,620	12	1	46218 25 0
1	92	24	30	0,650	12	1	46218 30 0
1	92	24	35	0,660	12	1	46218 35 0



- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- Set of nylon roses item 1.06002.00.0


1	85	22	25	0,730	12	1	46217 25 0
1	85	22	30	0,740	12	1	46217 30 0
1	85	22	35	0,770	12	1	46217 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- 11 to 17 mm. adjustable latch bolt
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal cranked extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0
- Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. VV)

1	85	22	25	0,650	12	1	46225	25	0
1	85	22	30	0,695	12	1	46225	30	0
1	85	22	35	0,700	12	1	46225	35	0




- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,750	12	1	46227	25	0
1	85	22	30	0,790	12	1	46227	30	0
1	85	22	35	0,790	12	1	46227	35	0



- Dead-bolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Set of nylon roses item 1.06012.01.0
- ON REQUEST:
Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. VV)
- AS ABOVE
- U-shaped faceplate 24x5 mm
- Pair of spacers 3 and 5 mm


1		22	25	0,600	12	1	46230	25	0
1		22	30	0,610	12	1	46230	30	0
1		22	35	0,635	12	1	46230	35	0
1		24	25	0,620	12	1	46233	25	0
1		24	30	0,640	12	1	46233	30	0
1		24	35	0,650	12	1	46233	35	0



- Dead-bolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Internal extended bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0


1		22	25	0,630	12	1	46250	25	0
1		22	30	0,660	12	1	46250	30	0
1		22	35	0,685	12	1	46250	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.




- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 2.5 to 16.5 mm. adjustable roller
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00.0
Extended bolts operated by external rods item 1.06443.05.0
Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. VV)

1	22	25	0,730	12	1	46252	25	0			
1	22	30	0,760	12	1	46252	30	0			
1	22	35	0,790	12	1	46252	35	0			



- Laminar steel hook
- Set of nylon roses item 1.06012.01.0
- Zinc plated steel striking plate item 1.06459.01.0

1	22	25	0,580	12	1	46240	25	0			
1	22	30	0,610	12	1	46240	30	0			
1	22	35	0,630	12	1	46240	35	0			



- Laminar steel hook
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- Zinc plated steel striker item 1.06459.01.0
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0

1	22	25	0,625	12	1	46260	25	0			
1	22	30	0,650	12	1	46260	30	0			
1	22	35	0,710	12	1	46260	35	0			



- No frontal closure
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Internal ragged extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0

	22	25	0,550	12	1	46270	25	0			
	22	30	0,580	12	1	46270	30	0			
	22	35	0,605	12	1	46270	35	0			



Technical features:

- Zinc plated steel case
- Nickel-plated latch, roller and dead-bolt
- Latch or reversible latch/bolt (where this is provided for)
- Current absorption 3,1A
- Voltage 12 V ac CE

Supplied as standard:

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- Cylinder with pin key series 02400
- Cylinder protective rose item 1.06460.00.0
- Cylinder with pin key series 02400
- Mechanical control button item 1.06110.10.0

Certification:

- This lock series is certified according to the European standard EN 15685:09
 - Security class 4 (700 Kg side thrust and 500 Kg front thrust resistance)
- Suitable for doors certified to EN1627:2011 up to WK/RC 2 resistance class


Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.




- Black painted steel adjustable U-shaped faceplate 24 x 7 mm, 2,600 mm.
 - upper adjustment 650 mm.
 - lower adjustment 150 mm.
- 10.5 to 16.5 adjustable latch bolt and bolt
- 3 lateral dead-bolts
- Faceplate cover nylon plugs
- 12 V ca CE

3	1	85	24	25	3,500	1	1	16425	25	0
3	1	85	24	30	3,500	1	1	16425	30	0
3	1	85	24	35	3,500	1	1	16425	35	0

- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm.
 - upper adjustment 350 mm.
 - lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- 12 V ca CE


3	1	85	24	25	3,780	1	1	16625	25	0
3	1	85	24	30	3,800	1	1	16625	30	0
3	1	85	24	35	3,820	1	1	16625	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm.
- 3 lateral dead-bolts
- Nylon faceplate cover plugs

3	1	24	25	3,600	1	1	46420	25	0
3	1	24	30	3,620	1	1	46420	30	0
3	1	24	35	3,640	1	1	46420	35	0




- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm.
 - 11 to 17 mm. adjustable latch and piston
 - 3 lateral dead-bolts
 - Nylon faceplate cover plugs
-
- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm. upper adjustment 350 mm. lower adjustment 150 mm.
 - 11 to 17 mm. adjustable latch
 - 3 lateral dead-bolts

3	1	85	24	25	3,500	1	1	46425	25	0
3	1	85	24	30	3,500	1	1	46425	30	0
3	1	85	24	35	3,500	1	1	46425	35	0

3	1	85	24	25	3,000	1	1	46625	25	0
3	1	85	24	30	3,000	1	1	46625	30	0
3	1	85	24	35	3,640	1	1	46625	35	0


Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable U-shaped faceplate
24 x 7 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 2 lateral dead-bolts
- Top extended bolt
- Nylon faceplate cover plugs


2	1	85	24	25	3,400	1	1	46435	25	0
2	1	85	24	30	3,420	1	1	46435	30	0
2	1	85	24	35	3,440	1	1	46435	35	0

TO BE DISCONTINUED




- Black lacquered steel adjustable U-shaped faceplate
24 x 7 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 1 lateral dead-bolt
- Vertical extended bolts
- Nylon faceplate cover plugs

1	1	85	24	25	3,500	1	1	46445	25	0
1	1	85	24	30	3,500	1	1	46445	30	0
1	1	85	24	35	3,240	1	1	46445	35	0

Type	Description	Locking points Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim. Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts • Nylon faceplate cover plugs 	3	1	24	25	3,600	1	1	46450	25	0
		3	1	24	30	3,500	1	1	46450	30	0
		3	1	24	35	3,640	1	1	46450	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm. upper adjustment 350 mm. lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts 	3	1	24	25	3,600	1	1	46650	25	0
		3	1	24	30	3,620	1	1	46650	30	0
		3	1	24	35	3,640	1	1	46650	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.




- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- Nylon faceplate cover plug

3	1	85	24	25	3,500	1	1	16525	25	0
3	1	85	24	30	3,500	1	1	16525	30	0
3	1	85	24	35	3,500	1	1	16525	35	0

- Stainless steel adjustable flat faceplate 24 x 7 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts


3	1	85	24	25	3,780	1	1	16725	25	0
3	1	85	24	30	3,800	1	1	16725	30	0
3	1	85	24	35	3,820	1	1	16725	35	0



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 3 lateral dead-bolts
- Nylon faceplate cover plugs

3	1	24	25	3,600	1	1	46520	25	0
3	1	24	30	3,620	1	1	46520	30	0
3	1	24	35	3,640	1	1	46520	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin. Pers. Spec.




- Black lacquered steel adjustable flat faceplate
24 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts
- Nylon faceplate cover plugs

3	1	85	24	25	3,600	1	1	46525	25	0
3	1	85	24	30	3,500	1	1	46525	30	0
3	1	85	24	35	3,500	1	1	46525	35	0

- Stainless steel adjustable flat faceplate
24 x 3 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts

3	1	85	24	25	3,600	1	1	46725	25	0
3	1	85	24	30	3,620	1	1	46725	30	0
3	1	85	24	35	3,640	1	1	46725	35	0



- Black lacquered steel adjustable flat faceplate
24 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral dead-bolts
- Nylon faceplate cover plugs

3	1	24	25	3,500	1	1	46550	25	0
3	1	24	30	3,500	1	1	46550	30	0
3	1	24	35	3,500	1	1	46550	35	0

- Stainless steel adjustable flat faceplate
24 x 3 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral dead-bolts

3	1	24	25	3,600	1	1	46750	25	0
3	1	24	30	3,620	1	1	46750	30	0
3	1	24	35	3,640	1	1	46750	35	0



Technical features:

- Gear-operated system
- Case thickness 15.5 mm
- Off-phase prevention system
- Zinc-plated die-cast alloy case
- Zinc-plated steel case cover
- Latch interchangeable with nickel-plated roller and deadbolt
- Reversible latch or latch/piston
- Pre-arranged for additional locking points

Supplied as standard:

- Pair of nylon roses item 1.06012.01.0
- Pair of under-faceplate nylon spacers item 1.06141.65.0
- Threaded pins for fixing of extension bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- "Modular" roller assembly item 1.06000.00.0
- Cylinder protective rose item 1.06460.05.0
- Mechanical control button item 1.06110.10.0
- Threaded bushing for extended bolt item 1.06290.06.0

Certification:

- This lock series is certified according to the European standard EN 12209:03
- - Security class 6 (1000 Kg side thrust and 600 Kg front thrust resistance)
- Suitable for doors certified to EN 1627:2011 up to WK/RC 4 resistance class

Hand:
0 = Non-handed


Cylinder to be ordered separately (Din CAM)



Multitop PRO

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Stainless steel faceplate 22x3 mm • Deadbolt and latchbolt • Adjustable latch and deadbolt from 10.5 to 16.5 mm. <p>deadlocking</p> <ul style="list-style-type: none"> • CE 12V ac voltage • Absorbed current 3.1 A • ON REQUEST: Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 Internal extended bolts item 1.06441.20.0 Pair of external bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.31.0 Extended bolts operated by external rods item 1.06443.36.0 	2	85	22	25	1,010	12	1	19225	25	0		
		2	85	22	30	1,070	12	1	19225	30	0		
		2	85	22	35	1,130	12	1	19225	35	0		
		2	85	22	40	1,190	12	1	19225	40	0		
	<ul style="list-style-type: none"> • Stainless steel faceplate 22x3 mm • Deadbolt and latch • 11 to 17 mm adjustable latch <p>ON REQUEST:</p> <ul style="list-style-type: none"> Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 Internal extended bolts item 1.06441.20.0 Pair of external bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.31.0 Extended bolts operated by external rods item 1.06443.36.0 	2	85	22	25	0,700	12	1	49225	25	0		
		2	85	22	30	0,780	12	1	49225	30	0		
		2	85	22	35	0,840	12	1	49225	35	0		
		2	85	22	40	0,900	12	1	49225	40	0		
		2	92	22	25	0,700	12	1	49228	25	0		
		2	92	22	30	0,780	12	1	49228	30	0		
		2	92	22	35	0,840	12	1	49228	35	0		
		2	92	22	40	0,900	12	1	49228	40	0		
	<ul style="list-style-type: none"> • Modular roller for locks 49225 and 49228 series adjustable from 2.5 to 16.5 mm • Supplied as standard: nylon inserts item 1.06141.70/71/86.0 					0,060	12	1	06000	00	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.



- Stainless steel faceplate 22x3 mm
- Deadbolt and roller
- Adjustable roller from 2.5 to 16.5 mm.
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - Internal extended bolts item 1.06441.20.0
 - Pair of external bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.31.0
 - Extended bolts operated by external rods item 1.06443.36.0
- Inserts for strike plates for locks 49250 series:
 - item 1.06141.70.0 for item 1.06463.16/17/34/35.0
 - item 1.06141.71.0 for item 1.06463.05/31/32/33.0
 - item 1.06141.86.0 for item 1.06461.30/35.0
- ADJUSTABLE METAL STRIKING PLATES
 - Central cylinder art.: diverting devices (pc.2) art.
 - 1.06463.05.0 1.06465.05.0
 - 1.06463.16.0 1.06465.06.0
 - 1.06463.17.0 1.06465.07.0
 - 1.06463.31.0 1.06465.21.0
 - 1.06463.32.0 1.06465.22.0
 - 1.06463.33.0 1.06465.23.0
 - 1.06463.34.0 1.06465.24.0
 - 1.06463.35.0 1.06465.25.0
 - 1.06461.07.0 1.06461.12.0
 - 1.06461.17.0 1.06461.22.0
 - 1.06461.30.0 1.06461.34.0
 - 1.06461.35.0 1.06461.39.0

2	22	25	0,720	12	1	49250 25 0
2	22	30	0,780	12	1	49250 30 0
2	22	35	0,840	12	1	49250 35 0
2	22	40	0,900	12	1	49250 40 0



Multitop PRO

Technical features:

- Gear-operated system
- Case 15.5 mm thick
- **Off-phase prevention system**
- Zinc-plated die-cast alloy case
- Zinc-plated steel case cover
- Latch interchangeable with nickel-plated roller and deadbolt
- 4th and 5th locking point pre-setting

Supplied as standard:

- Set of nylon roses 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- "MODULAR" roller item 1.06000.00.0
- Extended bolts for 4th and 5th locking

- points item 1.06449.10 - 1.06449.11
- Threaded pin for extended bolts with external rods item 1.06449.05.0
- Cylinder protective rose item 1.06460.05.0
- Mechanical control button item 1.06110.10.0

Certification:

- This lock series is certified according to the European standard pr EN 15685:14 - Security class 6 (1.000 Kg side thrust and 600 Kg front thrust resistance)
- Lock protective plate, to increase drillresistance (grade7) for 06436 series)
- Suitable for doors certified to EN1627:2011 up to WK/RC 4 resistance class (class 6), WK/RC 6 resistance class (class 7)

Hand:
0 = Non-handed

Cylinder to be ordered separately (Din CAM)



Type	Description	Locking points Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. **"deadlocking"**
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.47.0

3	2	85	24	25	3,520	1	1	19426	25	0		
3	2	85	24	30	3,580	1	1	19426	30	0		
3	2	85	24	35	3,640	1	1	19426	35	0		
3	2	85	24	40	3,700	1	1	19426	40	0		

- Black painted steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. **"deadlocking"**
- 3 lateral deadbolts
- Faceplate nylon covers
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.46.0

3	2	85	24	25	3,520	1	1	19436	25	0		
3	2	85	24	30	3,580	1	1	19436	30	0		
3	2	85	24	35	3,640	1	1	19436	35	0		
3	2	85	24	40	3,700	1	1	19436	40	0		

- Black painted steel U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. **"deadlocking"**
- 3 lateral deadbolts
- Faceplate nylon covers
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.67.0

3	2	85	24	25	3,520	1	1	19626	25	0		
3	2	85	24	30	3,580	1	1	19626	30	0		
3	2	85	24	35	3,640	1	1	19626	35	0		
3	2	85	24	40	3,700	1	1	19626	40	0		

- Black painted steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. **"deadlocking"**
- 3 lateral deadbolts
- Faceplate nylon covers
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	85	24	25	3,520	1	1	19636	25	0		
3	2	85	24	30	3,580	1	1	19636	30	0		
3	2	85	24	35	3,640	1	1	19636	35	0		
3	2	85	24	40	3,700	1	1	19636	40	0		

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• **92 MM CENTRE DISTANCE**


- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate nylon covers
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	92	24	25	3,520	3	1	19638	25	0		
3	2	92	24	30	3,580	3	1	19638	30	0		
3	2	92	24	35	3,640	3	1	19638	35	0		
3	2	92	24	40	3,700	3	1	19638	40	0		

• **ADJUSTABLE METAL STRIKING PLATES**

for central lock:	for diverting devices (pc.2)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• 85 MM CENTRE DISTANCE

- Black painted U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm. - bottom adjustment 150 mm.
- Adjustable latch from 11 to 17 mm.
- 3 side deadbolts
- Faceplate nylon covers
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.47.0

3	2	85	24	25	3,310	1	1	49426	25	0
3	2	85	24	30	3,370	1	1	49426	30	0
3	2	85	24	35	3,430	1	1	49426	35	0
3	2	85	24	40	3,490	1	1	49426	40	0

- Black painted U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.46.0

3	2	85	24	25	3,310	1	1	49436	25	0
3	2	85	24	30	3,370	1	1	49436	30	0
3	2	85	24	35	3,430	1	1	49436	35	0
3	2	85	24	40	3,490	1	1	49436	40	0

- Stainless steel U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.67.0

3	2	85	24	25	3,310	1	1	49626	25	0
3	2	85	24	30	3,370	1	1	49626	30	0
3	2	85	24	35	3,430	1	1	49626	35	0
3	2	85	24	40	3,490	1	1	49626	40	0

- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	85	24	25	3,520	1	1	49636	25	0
3	2	85	24	30	3,580	1	1	49636	30	0
3	2	85	24	35	3,640	1	1	49636	35	0
3	2	85	24	40	3,700	1	1	49636	40	0


92 MM CENTRE DISTANCE

- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST: Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	92	24	25	3,310	1	1	49638	25	0
3	2	92	24	30	3,370	1	1	49638	30	0
3	2	92	24	35	3,430	1	1	49638	35	0
3	2	92	24	40	3,490	1	1	49638	40	0

- Modular roller for locks 49000 series adjustable from 2.5 to 16.5 mm
- Supplied as standard: nylon inserts item 1.06141.70/71/86.0

0,060 12 1 06000 00 0



• ADJUSTABLE METAL STRIKING PLATES

- for central lock: for diverting devices (pc.2)
- 1.06463.05.0 1.06465.05.0
- 1.06463.16.0 1.06465.06.0
- 1.06463.17.0 1.06465.07.0
- 1.06463.31.0 1.06465.21.0
- 1.06463.32.0 1.06465.22.0
- 1.06463.33.0 1.06465.23.0
- 1.06463.34.0 1.06465.24.0
- 1.06463.35.0 1.06465.25.0
- 1.06461.07.0 1.06461.12.0
- 1.06461.17.0 1.06461.22.0
- 1.06461.30.0 1.06461.34.0
- 1.06461.35.0 1.06461.39.0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x3 mm, 2300 mm.
top adjustment 350 mm.
bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.56.0

3	2	85	24	25	3,520	1	1	19526 25 0
3	2	85	24	30	3,580	1	1	19526 30 0
3	2	85	24	35	3,640	1	1	19526 35 0
3	2	85	24	40	3,700	1	1	19526 40 0

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
top adjustment 350 mm.
bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate nylon covers
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	85	24	25	3,520	1	1	19726 25 0
3	2	85	24	30	3,580	1	1	19726 30 0
3	2	85	24	35	3,640	1	1	19726 35 0
3	2	85	24	40	3,700	1	1	19726 40 0

92 MM CENTRE DISTANCE

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
top adjustment 350 mm.
bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate nylon covers
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	92	24	25	3,520	3	1	19728 25 0
3	2	92	24	30	3,580	3	1	19728 30 0
3	2	92	24	35	3,640	3	1	19728 35 0
3	2	92	24	40	3,700	3	1	19728 40 0

• ADJUSTABLE METAL STRIKING PLATES

for central lock:	for diverting devices (pc.2)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.56.0

3	2	85	24	25	3,310	1	1	49526	25	0
3	2	85	24	30	3,370	1	1	49526	30	0
3	2	85	24	35	3,430	1	1	49526	35	0
3	2	85	24	40	3,490	1	1	49526	40	0


- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	85	24	25	3,310	1	1	49726	25	0
3	2	85	24	30	3,370	1	1	49726	30	0
3	2	85	24	35	3,430	1	1	49726	35	0
3	2	85	24	40	3,490	1	1	49726	40	0

92 MM CENTRE DISTANCE

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	92	24	25	3,310	1	1	49728	25	0
3	2	92	24	30	3,370	1	1	49728	30	0
3	2	92	24	35	3,430	1	1	49728	35	0
3	2	92	24	40	3,490	1	1	49728	40	0



- Modular roller for locks 49000 series adjustable from 2.5 to 16.5 mm
- Supplied as standard: nylon inserts item 1.06141.70/71/86.0

0,060	12	1	06000	00	0
-------	----	---	-------	----	---

• ADJUSTABLE METAL STRIKING PLATES

- for central lock: for diverting devices (pc.2)
- 1.06463.05.0 1.06465.05.0
- 1.06463.16.0 1.06465.06.0
- 1.06463.17.0 1.06465.07.0
- 1.06463.31.0 1.06465.21.0
- 1.06463.32.0 1.06465.22.0
- 1.06463.33.0 1.06465.23.0
- 1.06463.34.0 1.06465.24.0
- 1.06463.35.0 1.06465.25.0
- 1.06461.07.0 1.06461.12.0
- 1.06461.17.0 1.06461.22.0
- 1.06461.30.0 1.06461.34.0
- 1.06461.35.0 1.06461.39.0

Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Modular roller for locks 49000 series adjustable from 2.5 to 16.5 mm • Supplied as standard: nylon inserts item 1.06141.70/71/86.0 		0,060	12	1	06000	00	0	
	<ul style="list-style-type: none"> • Pair of lateral extended bolts operated by internal rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-arranged for 4th and 5th locking points • Closed case • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of rods dia. 8 mm. - Set of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2 pcs) • ON REQUEST: <ul style="list-style-type: none"> - Special strike plates (see Vademecum) - Internal straight extended bolts item 1.06441.10.0 for 4th and 5th locking points - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point rods 	19225, 49225, 49250, 49228	1,060	1	1	06443	31	0	
	<ul style="list-style-type: none"> • Pair of lateral extended bolts operated by external rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-arranged for 4th and 5th locking points • Closed case • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of external bolt connectors - Set of threaded pins • ON REQUEST: <ul style="list-style-type: none"> - Special strike plates (see Vademecum) - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point external extended bolts - External bolt connectors item 1.06442.00.0 	19225, 49225, 49250, 49228	1,060	1	1	06443	36	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fitt.
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm 	19436 - 49436	0,900	1	1	06444	46	0
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm 	19426 - 49426	0,900	1	1	06444	47	0
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • STAINLESS STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm 	19636 - 49636 19638 - 49638	0,900	1	1	06444	66	0
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • STAINLESS STEEL U-shaped adjustable faceplate 24x7 mm, 700 mm 	19626 - 49626	0,900	1	1	06444	67	0
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL flat adjustable faceplate 24x3 mm, 700 mm 	19526 - 49526	0,900	1	1	06444	56	0
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • STAINLESS STEEL flat adjustable faceplate 24x3 mm, 700 mm 	19726 - 19728 49726 - 49728	0,900	1	1	06444	76	0
	<ul style="list-style-type: none"> • Lock protective plate, to increase drillresistance (grade7 prEN 15685 : 14) for 19000 and 49000 series) 		0,100	6	1	06436	10	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Divertors protective plate, to increase drillresistace (grade7 prEN 15685 : 14) for 19000 and 49000 series) 		0,057 12	1	06436	11	0	
	<ul style="list-style-type: none"> Threaded pin for fixing additional extended bolts for 4th and 5th locking points 		0,002 50	1	06449	05	0	
	<ul style="list-style-type: none"> Additional TOP extended bolt for installation with locks with 24x7 mm U-shaped faceplate for 19000 and 49000 series 		0,187 1	1	06449	10	0	
	<ul style="list-style-type: none"> Additional FLOOR extended bolt for installation with locks with 24x7 mm U-shaped faceplate for 19000 and 49000 series 		0,135 1	1	06449	11	0	
	<ul style="list-style-type: none"> Microswitch to be used with divertors for locks 19000 and 49000 series 		0,020 1	1	06195	08	0	



Technical features:

- Galvanized steel case, height 64 mm
- Stainless steel faceplate
- Nickel-plated adjustable latchbolt, 11 to 17 mm
- Nickel-plated 3-throw deadbolt, 11 mm
- Square spindle, 8 mm
- Cylinder fixing via lock internal screw


Cylinder to be ordered separately



Supplied as standard:


- Threaded pins for additional lock fixing
- Pair of nylon roses item 1.06012.01.0
- Pair of below-faceplate nylon spacers item 1.06141.65.0
- Rose and lock fixing screws
- Instruction sheets

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Stainless steel faceplate 32x3 mm
- Reversible latch and dead-bolt
- ON REQUEST:
Adjustable metal striking plates (see vademecum)
"MODULAR" roller assembly item 1.06168-00-0
Internal cranked extended bolts item 1.06441.00.0
Internal straight extended bolts item 1.06441.10.0
Pair of external bolt connectors item 1.06442.00.0
Extended bolts operated by internal rods item 1.06443.00/21.0
Extended bolts operated by external rods item 1.06443.05/26.0
Cylinder protective rose item 1.06460-05/50/51/60/61
Rose for locks series 57300 item 1.06141-56-0 or item 1.06473.00.0

3	67	22	90	0,930	12	1	56357	90	0
3	67	22	100	0,995	12	1	56357	10	0



- "MODULAR" roller assembly for locks series 56357

0,040	12	1	06168	00	0
-------	----	---	-------	----	---



Technical features:

- Case height 82 mm
- Zinc plated case
- Zinc plated faceplate
- Nickel-plated steel dead-bolt
- Nickel-plated, reversible latch and roller
- Drill resistant protection plate

- Nylon faceplate spacer
- Lock fixing screws
- Instruction sheet

On request:

- Specific striking plates (see Vademecum)


Hand:

0 = Non-handed

Supplied as standard:

- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0
- Set of escutcheon fixing screws:
length 60 mm for the version with key item 1.00100.00.0
length 75 mm for the version with key item 1.00102.00.0

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt and latch



1 00100 00 1

4 67 25 70 1,150 12 1 57312 73 0



- Dead-bolt and latch
- Pre-arranged for additional locking points
- ON REQUEST:
Internal ragged extended bolts item 1.06451.00.0
Internal straight extended bolts item 1.06451.10.0
External bolt connectors item 1.06452.05.0
Extended bolts operated by internal rods item 1.06453.05.0




1 00100 00 1

4 67 25 70 1,226 12 1 57317 73 0



1 00102 00 1

4 67 25 70 1,230 12 1 57317 71 0



- Dead-bolt and roller
- 2 to 14.5 mm. adjustable roller



1 00100 00 1

4 25 70 1,025 12 1 57320 73 0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Dead-bolt and roller • 2 to 14.5 mm. adjustable roller • Pre-arranged for additional locking points • ON REQUEST: Internal ragged extended bolts item 1.06451.00.0 Internal straight extended bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 Extended bolts operated by internal rods item 1.06453.05.0 	 1 00100 00 1	4	25	70	1,080	12	1	57325	73	0	
		 1 00102 00 1	4	25	70	1,100	12	1	57325	71	0	
	<ul style="list-style-type: none"> • Dead-bolt only • Pre-arranged for additional locking points • Without drill resistant plate • ON REQUEST: Internal ragged extended bolts item 1.06451.00.0 Internal straight extended bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 Extended bolts operated by internal rods item 1.06453.05.0 	 1 00100 00 1	4	25	70	1,140	12	1	57335	73	0	
		 1 00102 00 1	4	25	70	1,160	12	1	57335	71	0	



Technical features:

- Case height 78 mm
- Zinc plated case
- Stainless steel faceplate
- Nickel-plated steel dead-bolt
- Nickel-plated roller and reversible latch
- Drill resistant protection plate
- Electrical and mechanical versions are interchangeable
- Current absorption 1,7 A
- Voltage 12 V ac CE

Supplied as standard:







- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0











Rose fastening screws:



- length 60 mm for the version with key item 1.00100.00.0
- length 75 mm for the version with key item 1.00102.00.0
- Set of nylon faceplate spacers item 1.06141.65.0
- Threaded extended bolts connectors
- Lock fixing screws
- Instruction sheet

On request:

- Specific striking plates
- Mechanical control button item 1.06110.10.0

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Dead-bolt and latch • 12 to 18 mm. adjustable latch and piston • Dead-locking latch • Hold-open latch 	 1 00100 00 1	4	67	22	90	1,330	1	1	17352	90	0
			4	67	22	100	1,385	1	1	17352	10	0
	<ul style="list-style-type: none"> • Dead-bolt and latch • 12 to 18 mm. adjustable latch and piston • Dead-locking latch • Hold-open latch • Pre-arranged for additional locking points • Threaded pivots for fixing extended bolts • ON REQUEST: Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.00.0 Extended bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	67	22	90	1,400	1	1	17357	90	0
			4	67	22	100	1,463	1	1	17357	10	0
			4	67	22	90	1,410	1	1	17357	91	0
			4	67	22	100	1,450	1	1	17357	11	0
	<ul style="list-style-type: none"> • Dead-bolt and latch • 11 to 17 mm. adjustable latch 	 1 00100 00 1	4	67	22	90	1,210	12	1	57352	90	0
			4	67	22	100	1,316	12	1	57352	10	0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Dead-bolt and latch • 11 to 17 mm. adjustable latch • Pre-arranged for additional locking points • Threaded pivots for fixing extended bolts • ON REQUEST: Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.00.0 Extended bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	67	22	90	1,275	12	1	57357	90	0	
			4	67	22	100	1,340	12	1	57357	10	0	
	<ul style="list-style-type: none"> • Dead-bolt and roller • 2 to 14.5 mm. adjustable roller 	 1 00102 00 1	4	67	22	90	1,305	12	1	57357	91	0	
			4	67	22	100	1,355	12	1	57357	11	0	
	<ul style="list-style-type: none"> • Dead-bolt and roller • 2 to 14.5 mm. adjustable roller • Pre-arranged for additional locking points • Threaded pivots for fixing extended bolts • ON REQUEST: Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.00.0 Extended bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	22	90	1,225	12	1	57365	90	0		
			4	22	100	1,250	12	1	57365	10	0		
	<ul style="list-style-type: none"> • Dead-bolt only 	 1 00102 00 1	4	22	90	1,230	12	1	57365	91	0		
			4	22	100	1,250	12	1	57365	11	0		
	<ul style="list-style-type: none"> • Dead-bolt only 	 1 00100 00 1	4	22	90	1,129	12	1	57370	90	0		
			4	22	100	1,168	12	1	57370	10	0		

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	 <ul style="list-style-type: none"> • Dead-bolt only • Pre-arranged for additional locking points • Threaded pivots for fixing extended bolts • ON REQUEST: <ul style="list-style-type: none"> Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.00.0 Extended bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	22	90	1,185	12	1	57375	90	0	
			4	22	100	1,250	12	1	57375	10	0	

Technical features:

- Rated voltage 12-24V ac and 12-24V dc CE.
- Long lipped ZAL stainless alloy casing
- Steel or stainless steel interchangeable faceplates

Supplied as standard:

- Faceplate fixing screws
- Faceplate spacer (series 05020, 05021, 05005.00.0.20)

Hand:
0 = Non-handed

1 = R.H. inwards

L.H. outwards

2 = L.H. inwards

R.H. outwards

Type	Description	Faceplate	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7 A • Hold open catch mechanism • Hold open device 		0,185	12	1	15100	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Hold open catch mechanism 		0,185	12	1	15101	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A • Hold open device 		0,185	12	1	15102	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A 		0,185	12	1	15110	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism • Hold open device 		0,185	12	1	15120	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism 		0,185	12	1	15121	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A • Hold open device 		0,185	12	1	15122	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A 		0,185	12	1	15130	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 12V dc CE - Current absorption 0,20A 		0,185	12	1	15140	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 24V dc CE - Current absorption 0,12A 		0,185	12	1	15150	00	0	

Type	Description	Faceplate	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Inside hold open catch mechanism • Hold open device 		0,185	12	1	15160	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,25A 		0,185	12	1	15170	00	0	
	<ul style="list-style-type: none"> • Electric striker casing without coils • Hold open device 		0,170	12	1	15180	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • 1 microswitch • Voltage 10/24V ac/dc CE • Current absorption 0,24A a 10V dc 		0,280	12	1	15200	00	0	
	<ul style="list-style-type: none"> • Square corners flat stainless steel faceplate • To be combined with locks with latch bolt only • Standard nylon spacer item 1.06141.84.0 (2 pair of 3 mm thickness) 	25	0,070	12	1	05005	00	0 20	
	<ul style="list-style-type: none"> • Square corners flat faceplate in satin-finished stainless steel. • Designed to match locks with latchbolt series 44600, 46000, 49000, 57300 • SUPPLIED AS STANDARD nylon spacers item 1.06141.84.0 (2 pair of 3 mm thickness) 	25	0,084	6	1	05020	00	0	
	<ul style="list-style-type: none"> • Square corners flat faceplate in satin-finished stainless steel. • Designed to match locks with latchbolt series 44600, 46000, 49000, 57300 • SUPPLIED AS STANDARD nylon spacers item 1.06141.85.0 (2 pair of 3 mm thickness) 	34	0,085	6	1	05021	00	1	
		34	0,085	6	1	05021	00	2	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated cranked internal extended bolts • SUPPLIED AS STANDARD: Set of 8 mm. diameter rods Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 	16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 56357, 57357, 57365, 57375	0,610	12	1	06441	00	0
	<ul style="list-style-type: none"> • Zinc plated straight internal extended bolts • SUPPLIED AS STANDARD: Set of 8 mm. diameter rods Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 	16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 57357, 57365, 57375	0,566	12	1	06441	10	0
	<ul style="list-style-type: none"> • Zinc plated straight internal extended bolts with screws • SUPPLIED AS STANDARD: Set of 8 mm. diameter rods Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Set of threaded bushes (M8) item 1.06290.05.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 	16225, 16227, 17357, 19225, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46270, 49225, 49228, 49250, 56357, 57357, 57365, 57375	0,630	12	1	06441	20	0
	<ul style="list-style-type: none"> • Set of controls for external extended bolts 	16225, 16227, 17357, 19225, 45250, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 56357, 57357, 57365, 57375	0,020	12	1	06442	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of lateral extended bolts operated by internal rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Set of faceplate spacers item 1.06141.65.0 Guide rods item 1.06224.00.0 (2 pcs) • Pin connector item 1.06291.20.0 • ON REQUEST: Special striking plates (see Vademecum) Personalised internal extended bolts item 1.06449.00.0 	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 56357, 57357, 57365, 57375	0,854	1	1	06443	00	0
	<ul style="list-style-type: none"> • Set of lateral extended bolts operated by external rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: set of external bolt connectors Set of threaded rods • ON REQUEST: Special striking plates (see Vademecum) 	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 56357, 57357, 57365, 57375	0,513	1	1	06443	05	0
	<ul style="list-style-type: none"> • Internal extended bolts for personalising lateral locking point distance • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Set of pins for fixing rods to lateral extended bolts 	1 06443 00 0	0,495	12	1	06449	00	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc-plated cranked internal extended bolts • SUPPLIED AS STANDARD: Set of 8 mm diameter bolts Set of 8 mm diameter tips item 1.06291.06.0 Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Set of rod guide clips item 1.06224.00.0 Noise-proof bushings item 1.06147.00.0 	57317, 57325, 57335	0,620	12	1	06451	00	0
	<ul style="list-style-type: none"> • Zinc plated internal straight extended bolts • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Hardened steel tip diameter 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 	57317, 57325, 57335	0,575	12	1	06451	10	0
	<ul style="list-style-type: none"> • Set of controls for external extended bolts 	57317, 57325, 57335	0,034	12	1	06452	05	0
	<ul style="list-style-type: none"> • Set of lateral extended bolts operated by internal rods • Swing bolts • 25 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Guide rods item 1.06224.00.0 (2 pcs) • ON REQUEST: Special striking plates (see Vademecum) Personalised internal rod extended bolts item 1.06419.10.0 	57317, 57325, 57335	0,865	12	1	06453	05	0

Type	Description	For series/item	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Set of zinc plated internal extended bolts with screws • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Hardened steel tip diameter 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 Set of threaded bushes item 1.06290.00.0 	57317, 57325, 57335	0,604	12	1	07088	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	• Black nylon rose	02400	0,001	100	1	06002	00	0
	• Set of black nylon roses for European profile cylinders		0,004	100	1	06012	01	0
	• Set of black nylon roses for oval cylinders		0,004	100	1	06027	01	0
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	1	06048	02	0
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	1	06048	03	0
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,050	25	1	06077	16	0
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,070	25	1	06077	20	0
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,052	25	1	06078	16	0
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,070	25	1	06078	20	0
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,030	25	1	06079	16	0
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,045	25	1	06079	20	0
	• Zinc plated steel flat striker	44360, 44361, 44460, 44461	0,037	25	1	06079	77	0
	• Zinc plated steel flat striker	44237, 44238	0,025	25	1	06080	16	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated steel flat striker 	44237, 44238	0,034	25	1	06080 20 0	
	<ul style="list-style-type: none"> • Brass floor striker diameter 11 mm. • USED FOR: extended bolts with 10 mm. diameter rods 	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	1	06086 00 0	
	<ul style="list-style-type: none"> • Brass floor striker, diameter 9 mm. • USED FOR: Internal extended bolts with 8 mm. diameter rods 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,013	12	1	06086 01 0	
	<ul style="list-style-type: none"> • Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extended bolts with 8 mm. diameter rods multi-point locks series 46445 Extended bolt for Multitop item 1.06449.11.0 	1 06415 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,020	12	1	06086 02 0	
	<ul style="list-style-type: none"> • Nylon push-button for electric locks (except series 14020 and 14021) 		0,020	12	1	06110 10 0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of chrome-plated brass key guides • AVAILABLE FINISHES: Polished brass (fin. 67) 	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,038	5	1	06123	00	1	
	<ul style="list-style-type: none"> • Set of nylon key guides 	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	5	1	06123	03	0	
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (8 mm.) for Alpha and Esedra Doors Shops profiles • Fitting both mid-rail horizontal locks and narrow frame upright locks 		0,010	25	1	06141	52	0	
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (2 mm.) 	44200, 44600	0,002	25	1	06141	53	0	
	<ul style="list-style-type: none"> • Nylon roller insert for striking plates of locks series 44600 		0,003	25	1	06141	55	0	
	<ul style="list-style-type: none"> • Nylon rose ensuring interchangeability with locks series 57300 	1 56357 10 0, 1 56357 90 0, 1 56358 90 0	0,004	12	1	06141	56	0	
	<ul style="list-style-type: none"> • Nylon faceplate spacer (2.5 mm.) for mid-rail locks with 16 and 20 mm. faceplate 		0,011	25	1	06141	57	0	
	<ul style="list-style-type: none"> • Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate 		0,016	25	1	06141	63	0	
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (5 mm.) for locks and upright locks 		0,003	25	1	06141	65	0	
	<ul style="list-style-type: none"> • Nylon faceplate spacer (3 mm.) for locks with 16 and 20 mm. faceplate 		0,010	25	1	06141	66	0	
	<ul style="list-style-type: none"> • Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate 		0,010	25	1	06141	67	0	
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (3 mm.) 	16200, 17000, 19200, 46200, 49200, 56357, 57000	0,005	25	1	06141	68	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	• Set of nylon faceplate spacers (2 mm.)	16200, 17000, 19200, 46200, 49200, 56357, 57000	0,001 25	1	06141	69	0
	• Nylon roller insert	1 06463 06 0, 1 06463 07 0, 1 06463 24 0, 1 06463 25 0, 1 06463 16 0, 1 06463 17 0, 1 06463 35 0, 1 06465 06 0, 1 06465 07 0, 1 06465 08 0, 1 06465 09 0, 1 06465 10 0 1 06465 24 0 1 06465 25 0	0,004 12	1	06141	70	0
	• Nylon roller insert	1 06463 05 0, 1 06463 08 0, 1 06463 09 0, 1 06463 15 0, 1 06463 18 0, 1 06463 19 0, 1 06463 21 0, 1 06463 22 0, 1 06463 23 0, 1 06463 31 0, 1 06463 32 0, 1 06463 33 0, 1 06465 02 0, 1 06465 03 0, 1 06465 05 0, 1 06465 21 0, 1 06465 22 0, 1 06465 23 0	0,003 12	1	06141	71	0
	• Nylon cover for DOUBLE-LEAF Ekip 50 door profile	1 06463 05 0, 1 06463 15 0, 1 06465 05 0	0,010 12	1	06141	74	0
	• Nylon roller insert	1 06141 40 0, 1 06141 41 0, 1 06141 42 0, 1 06141 43 0, 1 06141 44 0, 1 06141 46 0	0,002 12	1	06141	75	0
	• Nylon roller insert	1 06285 30 0, 1 06285 32 0, 1 06285 34 0, 1 06285 36 0, 1 06285 38 0, 1 06285 40 0, 1 06285 42 0, 1 06285 44 0	0,002 12	1	06141	76	0
	• Striking plate spacer (1,5 mm.)	1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06465 04 0, 1 06465 08 0, 1 06465 14 0	0,005 25	1	06141	77	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	16200, 19200, 46200, 49200	0,020	12	1	06141	78	0
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 7.5 to 10 mm) 	1 06141 40 0, 1 06285 36 0, 1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0	0,019	25	1	06141	79	0
	<ul style="list-style-type: none"> Upper striker for extended bolt Black nylon 	1 07089 52 0	0,022	25	1	06141	80	0
	<ul style="list-style-type: none"> Nylon roller insert 	1 06278 06 0, 1 06278 28 0	0,002	25	1	06141	82	0
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	1 05020 00 0	0,012	25	1	06141	84	0
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	1 05021 00 1, 1 05021 00 2	0,025	25	1	06141	85	0
	<ul style="list-style-type: none"> Nylon roller insert 	1 06232 05 0, 1 06461 25 0, 1 06461 30 0, 1 06461 35 0, 1 06461 40 0, 1 06461 45 0	0,002	12	1	06141	86	0
	<ul style="list-style-type: none"> Set of additional spacers for cylinder protection roses for profiles wider than 65-87 mm.. Spacers from 2 mm. (11 pieces) Screws M5 x 110 mm. (2 pieces) 	1 06460 05 0	0,145	1	1	06141	87	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm) 	1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0	0,019	25	1	06141	89	0	
	<ul style="list-style-type: none"> Noise proof bushes for bolts diameter 8,5 mm. (pc.2) diameter 10 mm. (pc.1) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1	06147	00	0	
	<ul style="list-style-type: none"> Noise proof bushes for bolts diameter 10 mm. (1 piece) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,001	100	1	06147	01	0	
	<ul style="list-style-type: none"> Zinc plated steel flat striker 	44650, 44660, 44665, 44680	0,096	25	1	06157	00	0	
	<ul style="list-style-type: none"> Zinc plated steel flat striker 	44670	0,100	25	1	06167	00	0	
	<ul style="list-style-type: none"> Nylon guide rod 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06443 00 0, 1 06443 20 0, 1 06451 00 0, 1 06451 10 0, 1 06453 05 0, 1 07088 00 0	0,003	25	1	06224	00	0	
	<ul style="list-style-type: none"> Zinc plated steel flat striker Includes a pair of spacers item 1.06141.65.0 (roller insert item. 1.06141.86.0) 	44600, 46000	0,065	25	1	06232	05	0	
	<ul style="list-style-type: none"> Zinc plated steel flat striker Includes a pair of spacers item 1.06141.65.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0	0,069	25	1	06232	06	0	
	<ul style="list-style-type: none"> Zinc plated steel striker 	46215, 46217, 46225, 46227, 46325, 46327	0,069	25	1	06232	20	0	
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	46215, 46217, 46225, 46227	0,141	12	1	06233	00	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	16215, 16217, 16225, 16227	0,160 12	1	06233	01	0
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	46230, 46250, 46252	0,130 12	1	06233	02	0
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265	0,144 12	1	06233	03	0
	<ul style="list-style-type: none"> Set of threaded bushes (M5) in nylon 	1 07088 00 0, 57317, 57325, 57335	0,010 12	1	06290	00	0
	<ul style="list-style-type: none"> Set of threaded bushes (M8) in metal 	1 06441 20 0, 16325, 17358, 46320, 46322, 46325, 46327, 56358, 57358, 57378	0,050 12	1	06290	05	0
	<ul style="list-style-type: none"> Set of threaded bushes (M8) in metal 	19000, 49000	0,050 12	1	06290	06	0
	<ul style="list-style-type: none"> Pair of threaded steel bushings (M8), anti-unscrewing 	46300, 46302, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336	0,025 25	1	06290	10	0
	<ul style="list-style-type: none"> Zinc plated steel saw resistant rod diameter 8 mm. Lateral push resistance KN 8 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,036 12	1	06291	01	0
	<ul style="list-style-type: none"> Zinc plated hardened steel single-piece rod diameter 8 mm. Lateral push resistance KN 14 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,038 12	1	06291	06	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265, 46420, 46520	0,057 12	1	06459	01	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265, 46420, 46520	0,034	12	1	06459	02	0	
	<ul style="list-style-type: none"> Sinterised stainless steel cylinder protection rose 	16000, 46000	0,125	1	1	06460	00	0	
	<ul style="list-style-type: none"> Protection rose for cylinders RS3, ASTRAL (with long key, special execution CL), and ASIX, in chrome plated carbonitrided steel complete with: spacers 2 mm. (19 pieces), 1 mm. (2 pieces) screws M5 x 73 mm. inside escutcheon AVAILABLE FINISHES: gold polished steel (fin. 15) 	18000, 49000	0,485	1	1	06460	05	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,082	12	1	06461	01	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,050	12	1	06461	02	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 1.5 mm. 	19000, 49000	0,053	12	1	06461	07	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	46230, 46250, 46252, 46450, 46550, 46650, 46750	0,085	12	1	06461	11	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 1,5 mm. 		0,034	12	1	06461	12	0	
	<ul style="list-style-type: none"> Stainless steel flat striker plate 36x2 mm for FORSTER "UNICO" profile for Multitop locks with latch+deadb and roller+deadb 		0,080	12	1	06461	17	0	






Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	57320, 57325, 57360, 57365	0,075	12	1	06461	20	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	56357, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,067	12	1	06461	21	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 36 x 2 mm. 		0,046	12	1	06461	22	0
	<ul style="list-style-type: none"> Stainless steel "U" striker plate 24x6 mm for locks with latch/roller and swing bolt (roller insert item 1.06141.86.0) 		0,098	12	1	06461	25	0
	<ul style="list-style-type: none"> Stainless steel "U" striker plate 24x6 mm for locks with swing bolt only 		0,065	12	1	06461	26	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. For roller locks use nylon insert item 1.06141.86.0 	19000, 49000	0,093	12	1	06461	30	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. 		0,065	12	1	06461	34	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. For roller locks use nylon insert item 1.06141.86.0 	18128, 18129, 18225, 18229, 18426, 18436, 18526, 18636, 48128, 48129, 48153, 48154, 48225, 48229, 48250, 48254, 48426, 48436, 48451, 48461, 48526, 48551, 48636, 48661	0,098	12	1	06461	35	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 		0,065	12	1	06461	39	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. with dead-bolt protection case For roller locks use nylon insert item 1.06141.86.0 	18128, 18129, 18225, 18229, 18426, 18526, 48128, 48129, 48153, 48154, 48225, 48229, 48250, 48254, 48426, 48451, 48526, 48551	0,182	12	1	06461	40	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. For roller locks use nylon insert item 1.06141.86.0 		0,182	12	1	06461	45	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 25 x 3 mm with nylon slide 	16205, 16207, 16215, 16217, 16225, 16227, 16425, 16435, 16445, 16525, 16625, 16725	0,077	12	1	06462	01	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 25 x 3 mm. 	17352, 17357, 57352, 57357, 57370, 57375	0,058	12	1	06462	20	0	
	<ul style="list-style-type: none"> Brass oval inside escutcheon for European profile cylinders Finish: Polished lacquered brass 		0,100	12	1	06473	20	0	
	<ul style="list-style-type: none"> Finish: Nickel-plated, satin finished and chrome brass 		0,100	12	1	06473	20	0	B1
	<ul style="list-style-type: none"> Brass oval inside escutcheon for European profile cylinders with adjustable shaft Finish: Polished lacquered brass 		0,100	12	1	06473	30	0	
	<ul style="list-style-type: none"> Finish: Nickel-plated, satin finished and chrome brass 		0,100	12	1	06473	30	0	B1
	<ul style="list-style-type: none"> Set of nylon contacts for electric locks complete with spacers: 2 mm. (6 pieces) 5 mm. (1 piece) 		0,047	6	1	06511	00	0	


Type	Description	For series/item	Unit weight Kg	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of coils • 12 V ac CE 	14010, 14011, 14012, 14017	0,030	6	1	07013	00	0
	<ul style="list-style-type: none"> • Zinc plated steel flat striker 	44210	0,035	25	1	07027	00	0
	<ul style="list-style-type: none"> • Zinc plated steel flat striker 	45010, 45110	0,035	25	1	07028	00	0
	<ul style="list-style-type: none"> • Brass flat striker 	45100	0,035	25	1	07028	10	0
	<ul style="list-style-type: none"> • Set of coils • 12 V ac CE 	14020, 14021	0,027	6	1	07047	00	0
	<ul style="list-style-type: none"> • Set of coils • 12 V ac CE 	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 19000	0,035	6	1	07086	00	0
	<ul style="list-style-type: none"> • Set of coils • 24 V ac CE 	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 19000	0,035	6	1	07086	01	0
	<ul style="list-style-type: none"> • Set of coils • 12 V ac CE 	17352, 17353, 17357, 17358	0,035	6	1	07128	00	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,173	12	1	06463	05	0
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,166	12	1	06463	06	0
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,160	12	1	06463	07	0
	<ul style="list-style-type: none"> • For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,150	12	1	06463	09	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Lateral adjustment 2,5 mm For roller locks use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,180 12	1	06463	16	0
	<ul style="list-style-type: none"> Lateral adjustment 2,5 mm For roller locks use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,170 12	1	06463	17	0
	<ul style="list-style-type: none"> Lateral adjustment 8 mm For roller locks use nylon insert item 1.06141.71.0 PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,185 12	1	06463	21	0
	<ul style="list-style-type: none"> REPLACES ITEM 1.06463.08.0 Lateral adjustment 4 mm Central part in lacquered steel For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,130 12	1	06463	22	0
	<ul style="list-style-type: none"> IDEM Central part in stainless steel 		0,129 12	1	06463	23	0

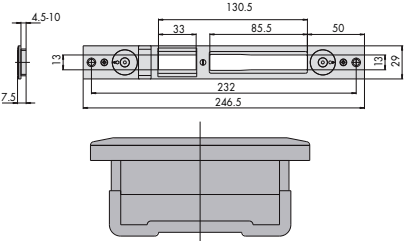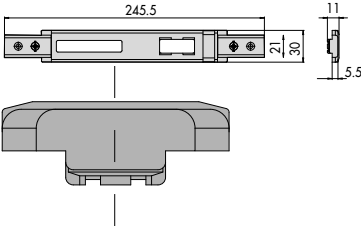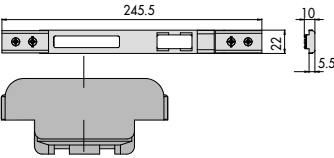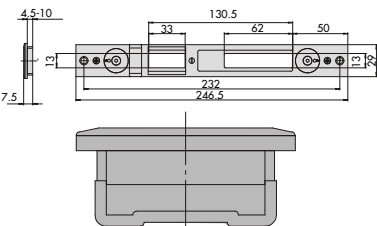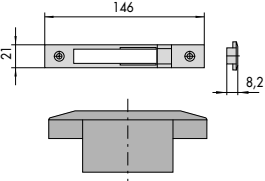
Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> REPLACING ITEM 1.06463.04.0 Lateral adjustment 2.5 mm. 4.5 to 10 mm adjustable thickness. For roller locks, use nylon insert item 1.06141.70.0 	16000, 46000	0,150	12	1	06463	24	0	
	<ul style="list-style-type: none"> AS ABOVE Stainless steel 		0,150	12	1	06463	25	0	
	<ul style="list-style-type: none"> Lateral adjustment 8 mm For roller locks use nylon insert item 1.06141.71.0 PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. 	19000, 49000, 43200, 43700, 43800	0,230	12	1	06463	31	0	
	<ul style="list-style-type: none"> ON REQUEST: Nickel plated brass (fin. 12) 								
	<ul style="list-style-type: none"> REPLACES ITEM 1.06463.18.0 Lateral adjustment 4 mm Central part in lacquered steel For roller locks use nylon insert item 1.06141.71.0 	19000, 49000, 43200, 43700, 43800	0,145	12	1	06463	32	0	
	<ul style="list-style-type: none"> IDEM Central part in stainless steel 		0,141	12	1	06463	33	0	
	<ul style="list-style-type: none"> REPLACING ITEM 1.06463.14.0 Lateral adjustment 2.5 mm 4.5 to 10 mm adjustable thickness. For roller locks, use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,158	12	1	06463	34	0	
	<ul style="list-style-type: none"> IDEM Central part in stainless steel 		0,141	12	1	06463	35	0	
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520, 56357, 57330, 57335, 57370, 57375	0,053	12	1	06465	02	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.




- For roller locks use nylon insert item 1.06141.71.0

1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 46520, 48123, 48220, 48224, 48420, 48520, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,108	12	1	06465	03	0
--	-------	----	---	-------	----	---



- Lateral adjustment 2,5 mm
- For roller locks use nylon insert item 1.06141.71.0

1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,125	12	1	06465	05	0
--	-------	----	---	-------	----	---

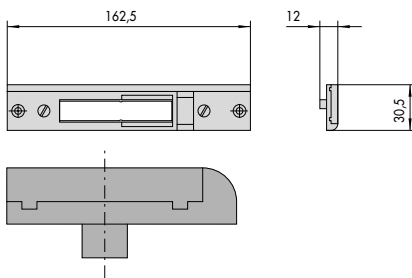


- Lateral adjustment 2,5 mm
- For roller locks use nylon insert item 1.06141.70.0

1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,122	12	1	06465	06	0
--	-------	----	---	-------	----	---

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,117	12	1	06465	07	0
	<ul style="list-style-type: none"> • For roller locks use nylon insert item 1.06141.70.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,099	12	1	06465	08	0
	<ul style="list-style-type: none"> • For roller locks use nylon insert item 1.06141.70.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,115	12	1	06465	10	0
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • REQUEST: Nickel plated brass (fin. 12) 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 19000, 46200, 43700, 43800, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,140	12	1	06465	21	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.




- REPLACES ITEM 1.06465.02.0
- Lateral adjustment 4 mm
- Central part in lacquered steel
- For roller locks use nylon insert item 1.06141.71.0

1 06443 00 0,	0,112	12	1 06465 22 0
1 06443 05 0,			
1 06453 05 0,			
17352, 17357,			
19000, 43700,			
43800, 46200,			
46210, 46220,			
46420, 46520,			
48123, 49000,			
56357, 57312,			
57317, 57320,			
57325, 57330,			
57335, 57352,			
57357, 57360,			
57365, 57370,			
57375			

- IDEM
- Central part in stainless steel

0,112	12	1 06465 23 0
-------	----	--------------

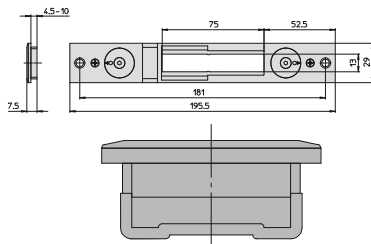

- REPLACING ITEM 1.06463.04.0
- Lateral adjustment 2.5 mm
- 4.5 to 10 mm adjustable thickness.
- For roller locks, use nylon insert item 1.06141.70.0

1 06443 00 0,	0,125	12	1 06465 24 0
1 06443 05 0,			
1 06453 05 0,			
19000, 43700,			
43800, 46200,			
46210, 46220,			
46420, 46520,			
49000, 17300,			
56300, 57300,			
43700, 43800			

- AS ABOVE
- Stainless steel

0,112	12	1 06465 25 0
-------	----	--------------

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
		14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44210, 44227, 44240, 44245, 44350, 44450	0,016	25	1	06062	00	0
		14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44210, 44227, 44240, 44245, 44350, 44450	0,019	25	1	06072	00	0
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,024	25	1	06141	35	0
		57320, 57325, 57360, 57365	0,030	25	1	06141	36	0
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,034	25	1	06141	37	0
		57320, 57325, 57360, 57365	0,030	25	1	06141	38	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM	Type	Dim.	Hand	Fin.	Pers.	Spec.
	<p>• For roller locks item 57320 - 57325 - 57360 - 57365 use nylon insert item 1.06141.75.0</p>	<p>17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375</p>	0,035	25	1 06141 40 0						
		<p>17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375</p>	0,025	25	1 06141 42 0						
		<p>17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375</p>	0,029	25	1 06141 44 0						
		<p>44220, 44221, 44225, 44226</p>	0,014	25	1 06277 01 0						
		<p>14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461</p>	0,018	25	1 06277 02 0						
		<p>44130, 44230, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471</p>	0,030	25	1 06277 03 0						

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
		44220, 44221, 44225, 44226	0,030 25	1	06277	10	0
		14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461	0,026 25	1	06277	11	0
		14460, 44120, 44360, 44460	0,021 25	1	06277	14	0
		44130, 44230, 44235, 44237, 44370, 44470	0,030 25	1	06277	15	0
		44221, 44226	0,015 25	1	06277	28	0
		14461, 44121, 44361, 44461	0,018 25	1	06277	32	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
		14461, 44121, 44361, 44461	0,030	25	1	06277	41	0
		14461, 44121, 44361, 44461	0,030	25	1	06277	44	0
		44219, 44221, 44224, 44226	0,012	25	1	06277	76	0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,016	25	1	06277	77	0
		44131, 44231, 44236, 44238, 44371, 44471	0,016	25	1	06277	78	0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030	25	1	06277	80	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
		44219, 44220, 44221, 44224, 44225, 44226	0,007	25	1	06277	88 0
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,013	25	1	06277	89 0
		14461, 44121, 44361, 44461	0,030	25	1	06277	92 0
		44219, 44220, 44221, 44224, 44225, 44226	0,030	25	1	06277	94 0
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,030	25	1	06277	95 0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
		44221, 44226	0,023	25	1	06277	99	0
		44219, 44220, 44221, 44224, 44225, 44226	0,019	25	1	06278	01	0
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,022	25	1	06278	02	0
		14011, 14021, 14351, 14451, 14461, 14511, 44111, 44116, 44121, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44361, 44451, 44461	0,020	25	1	06278	04	0
		44131, 44231, 44236, 44238, 44371, 44471	0,017	25	1	06278	05	0
	<ul style="list-style-type: none"> For roller locks item 44230 - 44235 - 44370 - 44470 use nylon insert item 1.06141.82.0 	44220, 44225, 44230, 44235, 44360, 44370, 44460, 44470	0,020	25	1	06278	06	0


Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<p>• For lock 1.5C611.45.0.00.EN on round ABITHAL profile</p>		0,026	12	1	06278	07 0
		44220, 44225	0,035	25	1	06278	16 0
		14460, 44120, 44360, 44460	0,033	25	1	06278	17 0
		44131, 44231, 44236, 44238, 44371, 44471	0,025	25	1	06278	19 0
		44221, 44226	0,025	25	1	06278	20 0
		14461, 44121, 44361, 44461	0,026	25	1	06278	21 0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
		44131, 44231, 44236, 44238, 44371, 44471	0,035 25	1	06278	22	0
		44219, 44221, 44224, 44226	0,017 25	1	06278	26	0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,022 25	1	06278	27	0
	<ul style="list-style-type: none"> • Use nylon roller insert item 1.06141.82.0 	44131, 44231, 44236, 44238, 44371, 44471	0,030 25	1	06278	28	0
		44219, 44221, 44224, 44226	0,019 25	1	06278	64	0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,021 25	1	06278	65	0


Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
		44131, 44231, 44236, 44238, 44371, 44471	0,019	25	1	06278	66	0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030	25	1	06278	80	0
		16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,025	25	1	06285	25	0
		16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,035	12	1	06285	27	0
	<ul style="list-style-type: none"> • For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,026	12	1	06285	30	0
		16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,035	12	1	06285	32	0

Type	Description	For series/item	Unit weight Pieces	ITEM					
				Type	Dim.	Hand	Fin.	Pers. Spec.	
		16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,020	12	1 06285 34 0				
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,030	25	1 06285 35 0				
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,030	12	1 06285 36 0				
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,015	25	1 06285 37 0				
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,048	6	1 06285 38 0				
		16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,072	6	1 06285 42 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.




1 06443 00 0, 1 06443 05 0, 0,030 12 **1 06285 43 0**
 1 06453 05 0, 46200,
 46210, 46220, 46420,
 46520

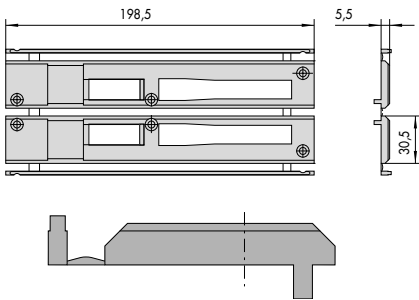


• For roller locks item 46230 - 16205, 16215, 16225,
 46250 - 46450 - 46550 - 46650 16425, 16525, 16625,
 - 46750 use nylon insert item 16725, 46215, 46225,
 1.06141.76.0 46230, 46250, 46425,
 46435, 46445, 46450,
 46525, 46550, 46625,
 46650, 46725, 46750

0,060 6 **1 06285 44 0**



14010, 14011, 14012,
 14017, 14020, 14021,
 14350, 14351, 14450,
 14451, 14510, 14511,
 44110, 44111, 44115,
 44116, 44140, 44141,
 44145, 44146, 44150,
 44151, 44155, 44156,
 44160, 44161, 44227,
 44228, 44240, 44241,
 44245, 44246, 44350,
 44351, 44450, 44451

0,014 25 **1 06287 02 0**




14010, 14011, 14012,
 14017, 14020, 14021,
 14350, 14351, 14450,
 14451, 14510, 14511,
 44110, 44111, 44115,
 44116, 44140, 44141,
 44145, 44146, 44150,
 44151, 44155, 44156,
 44160, 44161, 44227,
 44228, 44240, 44241,
 44245, 44246, 44350,
 44351, 44450, 44451

0,030 25 **1 06287 11 0**

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44227, 44240, 44245, 44350, 44450	0,016	25	1	06287	14 0
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44227, 44240, 44245, 44350, 44450	0,024	25	1	06287	17 0
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,017	25	1	06287	21 0
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,015	25	1	06287	26 0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,014	25	1	06287	27	0
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,015	25	1	06287	29	0
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,030	25	1	06287	50	0
	<ul style="list-style-type: none"> For roller locks item 44670 use nylon insert item 1.06141.55.0 	44650, 44660, 44665, 44680	0,022	25	1	06287	64	0
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,016	25	1	06287	65	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.




14011, 14021, 14351,
14352, 14451, 14452,
14511, 14512, 44111,
44116, 44141, 44146,
44151, 44152, 44156,
44157, 44161, 44162,
44228, 44241, 44246,
44351, 44451

0,012 25 1 06287 77 0




44650, 44660, 44665,
44680

0,012 25 1 06287 88 0




14010, 14011, 14012,
14017, 14020, 14021,
14350, 14351, 14352,
14450, 14451, 14452,
14510, 14511, 14512,
44110, 44111, 44115,
44116, 44140, 44141,
44145, 44146, 44150,
44151, 44152, 44155,
44156, 44157, 44160,
44161, 44162, 44227,
44228, 44240, 44241,
44245, 44246, 44350,
44351, 44450, 44451

0,011 25 1 06287 89 0

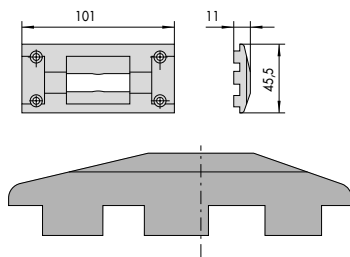



14011, 14021, 14351,
14451, 14511, 44111,
44116, 44141, 44146,
44151, 44156, 44161,
44228, 44241, 44246,
44351, 44451


0,023 25 1 06287 92 0



44650, 44660, 44665,
44680

0,022 25 1 06287 94 0


Type	Description	For series/item	 Unit weight Kg	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.



14010, 14011, 14012,
14017, 14020, 14021,
14350, 14351, 14352,
14450, 14451, 14452,
14510, 14511, 14512,
44110, 44111, 44115,
44116, 44140, 44141,
44145, 44146, 44150,
44151, 44152, 44155,
44156, 44157, 44160,
44161, 44162, 44227,
44228, 44240, 44241,
44245, 44246, 44350,
44351, 44450, 44451

0,020 25


1 06287 95 0




14011, 14021, 14351,
14451, 14511, 44111,
44116, 44141, 44146,
44151, 44156, 44161,
44228, 44241, 44246,
44351, 44451

0,017 25


1 06287 97 0

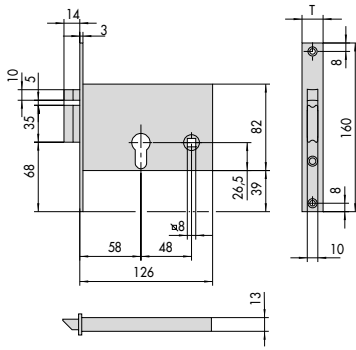

	T		T
1.14010.60	16	1.14017.60	16
1.14011.60	20		
1.14012.60	16		



	E	T	B	A
1.14450.70	70	16	10,5	-
1.14450.80	80	16	10,5	-
1.14450.90	90	16	10,5	-
1.14451.70	70	20	10,5	-
1.14451.80	80	20	10,5	-
1.14451.90	90	20	10,5	-
1.14452.70	70	14,7	15	4,5
1.14452.80	80	14,7	15	4,5
1.14452.90	90	14,7	15	4,5

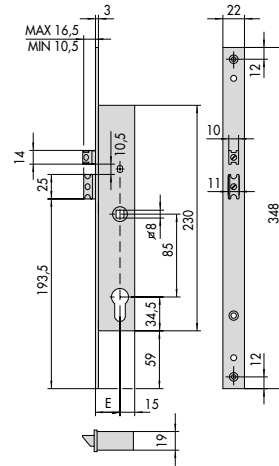


16205
E = 25 - 30 - 35


1

4


7

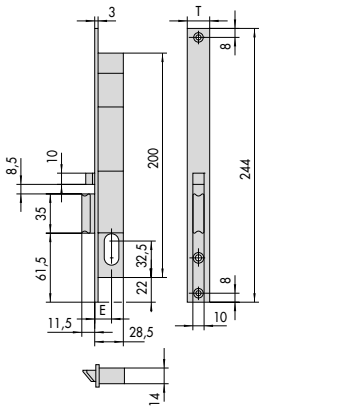

	T	E	T	E
1.14020.15	16	15	1.14021.15	20
1.14020.18	16	18	1.14021.18	20



	E	T	B	A	M
1.14460.70	70	16	10,5	-	19
1.14460.80	80	16	10,5	-	19
1.14460.90	90	16	10,5	-	19
1.14461.70	70	20	10,5	-	19
1.14461.80	80	20	10,5	-	19
1.14461.90	90	20	10,5	-	19
1.14462.70	70	14,7	15	4,5	23,5
1.14462.80	80	14,7	15	4,5	23,5
1.14462.90	90	14,7	15	4,5	23,5

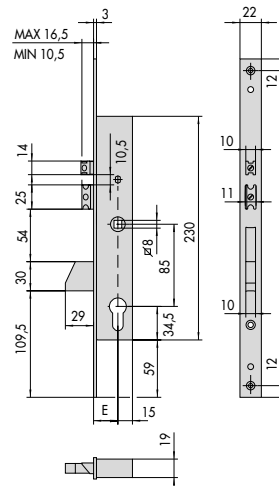


16215, 16216, 16217

E = 25 - 30 - 35


2

5


8

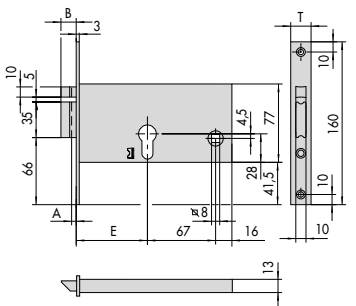

	E	T	B	A
1.14350.70	70	16	10,5	-
1.14350.80	80	16	10,5	-
1.14350.90	90	16	10,5	-
1.14351.70	70	20	10,5	-
1.14351.80	80	20	10,5	-
1.14351.90	90	20	10,5	-
1.14352.70	70	14,7	15	4,5
1.14352.80	80	14,7	15	4,5



	E	T	B	A
1.14510.70	70	16	10,5	-
1.14510.80	80	16	10,5	-
1.14510.90	90	16	10,5	-
1.14511.70	70	20	10,5	-
1.14511.80	80	20	10,5	-
1.14511.90	90	20	10,5	-
1.14512.70	70	14,7	15	4,5
1.14512.80	80	14,7	15	4,5
1.14512.90	90	14,7	15	4,5

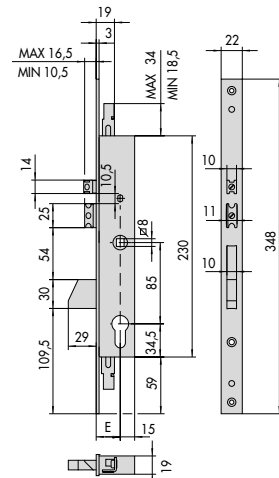


16225, 16227

E = 25 - 30 - 35



3

6


9

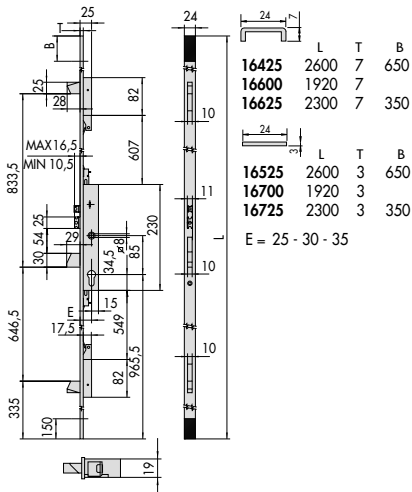


10

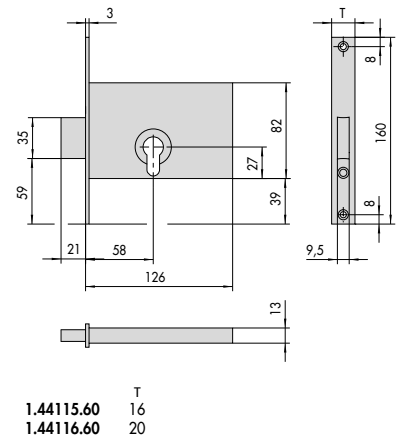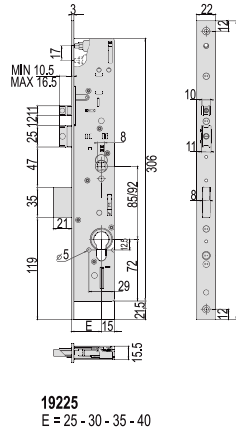


13

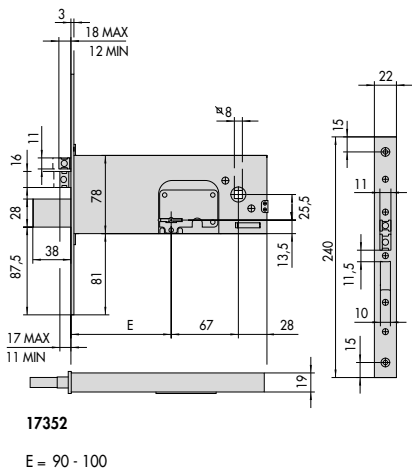


11

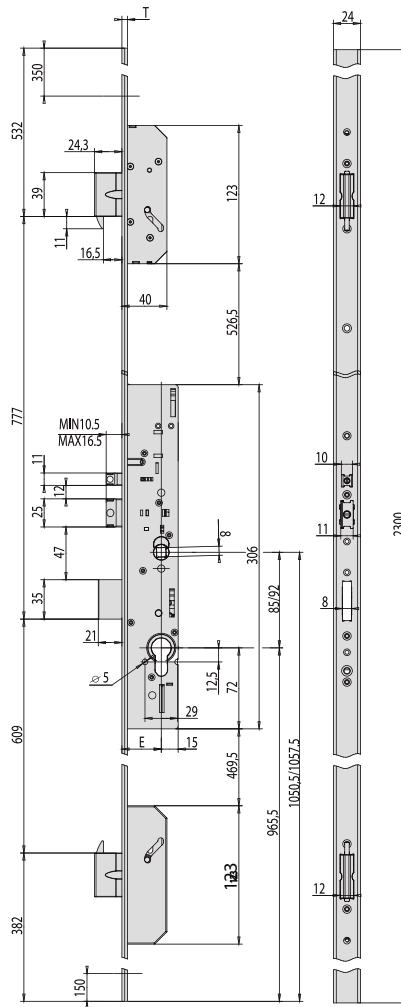


13

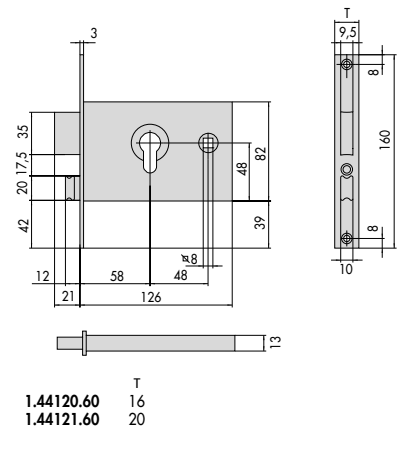


15

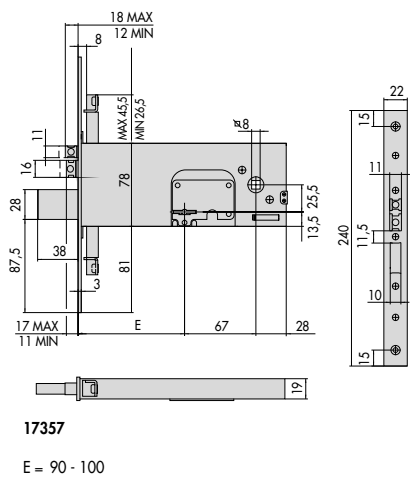

12

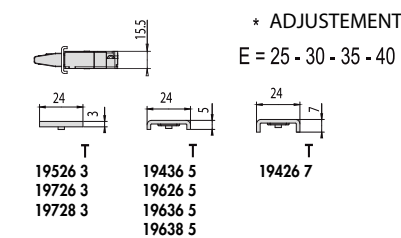


14

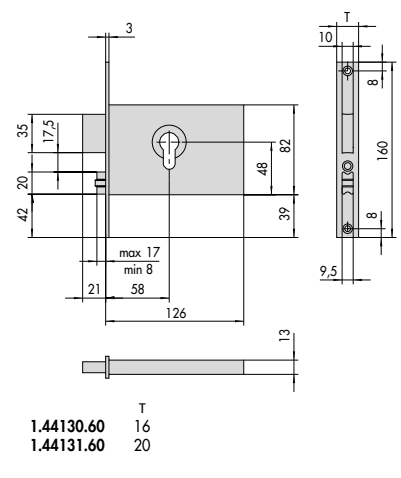


16


17



1.44140.60	T	16
1.44141.60	T	20

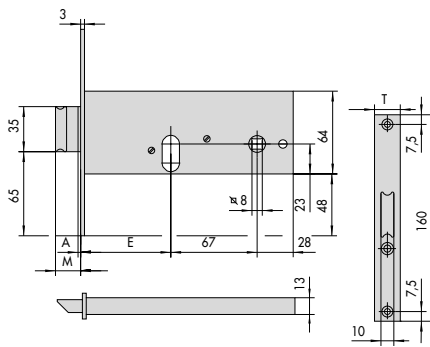

1.44155.60	E	T	M	A
1.44155.70	60	16	19	.
1.44155.80	70	16	28	.
1.44155.90	80	16	28	.
1.44156.60	60	20	19	.
1.44156.70	70	20	28	.
1.44156.80	80	20	28	.
1.44156.90	90	20	28	.
1.44157.70	70	14,7	32,5	4,5




1.44217.15	T	16
1.44218.15	T	20


18

21


24

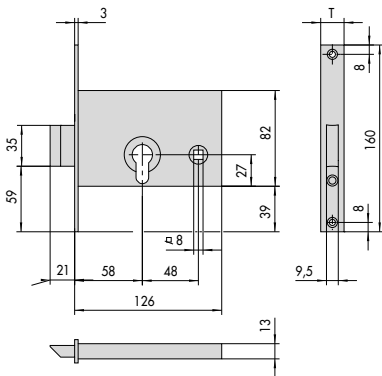

1.44145.60	T	16
1.44146.60	T	20

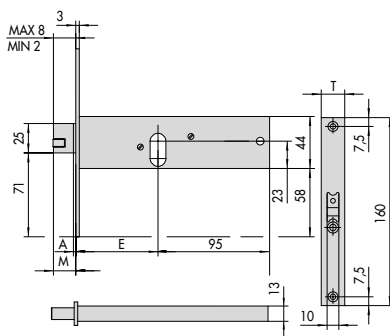

1.44160.60	E	T	M	A
1.44160.70	60	16	19	.
1.44160.80	70	16	28	.
1.44160.90	80	16	28	.
1.44161.60	60	20	19	.
1.44161.70	70	20	28	.
1.44161.80	80	20	28	.
1.44161.90	90	20	28	.

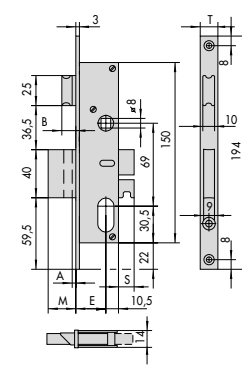


1.44219.25	E	T	M	A	B	S	1.44224.25	E	T	M	A	B	S
1.44219.30	25	14,7	16	6,5	14,5	.	1.44224.30	25	14,7	23	6,5	14,5	13
1.44220.15	15	16	11	2	10	.	1.44225.15	15	16	18	2	10	13
1.44220.18	18	16	11	2	10	.	1.44225.18	18	16	18	2	10	13
1.44220.25	25	16	11	2	10	.	1.44225.25	25	16	18	2	10	13
1.44220.30	30	16	11	2	10	.	1.44225.30	30	16	18	2	10	13
1.44220.35	35	16	11	2	10	.	1.44225.35	35	16	18	2	10	13
1.44221.15	15	20	11	2	10	.	1.44226.15	15	20	18	2	10	13
1.44221.18	18	20	11	2	10	.	1.44226.18	18	20	18	2	10	13
1.44221.25	25	20	11	2	10	.	1.44226.25	25	20	18	2	10	13
1.44221.30	30	20	11	2	10	.	1.44226.30	30	20	18	2	10	13
1.44221.35	35	20	11	2	10	.	1.44226.35	35	20	18	2	10	13


19

22


25

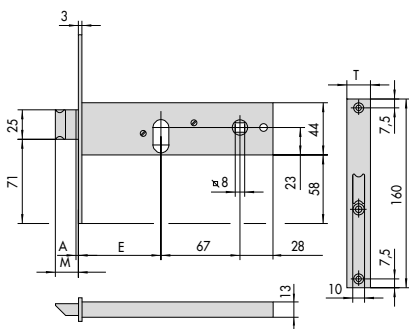

1.44150.60	E	T	M	A
1.44150.70	60	16	19	.
1.44150.80	70	16	28	.
1.44150.90	80	16	28	.
1.44151.60	60	20	19	.
1.44151.70	70	20	28	.
1.44151.80	80	20	28	.
1.44151.90	90	20	28	.
1.44152.70	70	14,7	32,5	4,5
1.44152.80	80	14,7	32,5	4,5
1.44152.90	90	14,7	32,5	4,5

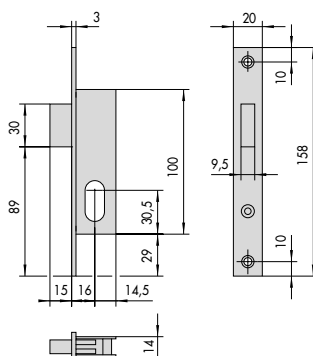

1.44210.16

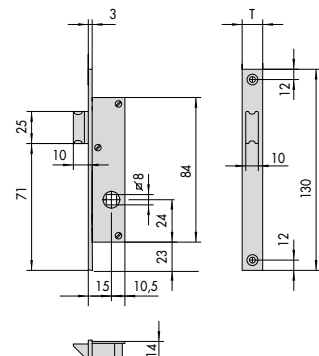


ARTICOLO	T
1.44227.15	16
1.44228.15	20

20


23

26

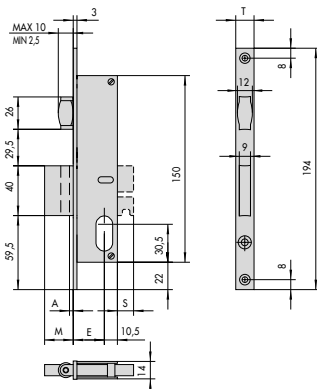


E	T	M	A	B	S	E	T	M	A	B	S		
1.44230.15	15	16	11	2	10	-	1.44235.15	15	16	18	2	10	13
1.44230.18	18	16	11	2	10	-	1.44235.18	18	16	18	2	10	13
1.44230.25	25	16	11	2	10	-	1.44235.25	25	16	18	2	10	13
1.44230.30	30	16	11	2	10	-	1.44235.30	30	16	18	2	10	13
1.44230.35	35	16	11	2	10	-	1.44235.35	35	16	18	2	10	13
1.44231.15	15	20	11	2	10	-	1.44236.15	15	20	18	2	10	13
1.44231.18	18	20	11	2	10	-	1.44236.18	18	20	18	2	10	13
1.44231.25	25	20	11	2	10	-	1.44236.25	25	20	18	2	10	13
1.44231.30	30	20	11	2	10	-	1.44236.30	30	20	18	2	10	13
1.44231.35	35	20	11	2	10	-	1.44236.35	35	20	18	2	10	13

27

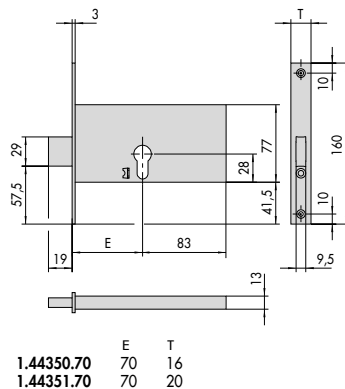


E	T
1.44350.70	70 16
1.44351.70	70 20

30

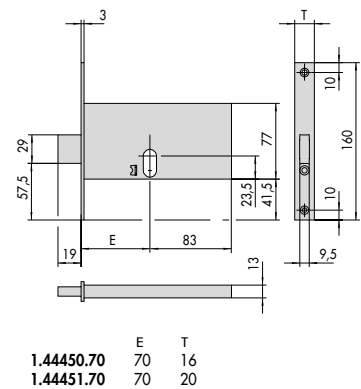


E	T
1.44450.70	70 16
1.44451.70	70 20

33




T	
1.44237.15	16
1.44238.15	20

28




E	T	M	A	B
1.44360.70	70	16	19	10,5
1.44360.80	80	16	19	10,5
1.44360.90	90	16	19	10,5
1.44361.70	70	20	19	10,5
1.44361.80	80	20	19	10,5
1.44361.90	90	20	19	10,5
1.44362.70	70	14,7	23,5	4,5 15
1.44362.80	80	14,7	23,5	4,5 15
1.44362.90	90	14,7	23,5	4,5 15

31

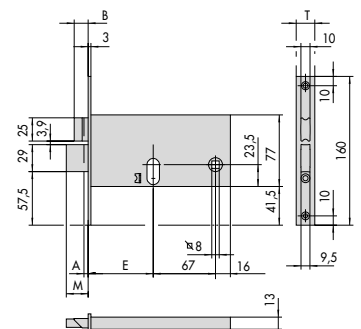


E	T	M	A	B
1.44460.70	70	16	19	19
1.44460.80	80	16	19	19
1.44460.90	90	16	19	19
1.44461.70	70	20	19	10,5
1.44461.80	80	20	19	10,5
1.44461.90	90	20	19	10,5
1.44462.70	70	14,7	23,5	4,5 15
1.44462.80	80	14,7	23,5	4,5 15
1.44462.90	90	14,7	23,5	4,5 15

34




E	T	M	A	B	S	E	T	M	A	B	S		
1.44240.15	15	16	11	2	10	-	1.44245.15	15	16	18	2	10	13
1.44240.18	18	16	11	2	10	-	1.44245.18	18	16	18	2	10	13
1.44240.25	25	16	11	2	10	-	1.44245.25	25	16	18	2	10	13
1.44240.30	30	16	11	2	10	-	1.44245.30	30	16	18	2	10	13
1.44240.35	35	16	11	2	10	-	1.44245.35	35	16	18	2	10	13
1.44241.15	15	20	11	2	10	-	1.44246.15	15	20	18	2	10	13
1.44241.18	18	20	11	2	10	-	1.44246.18	18	20	18	2	10	13
1.44241.25	25	20	11	2	10	-	1.44246.25	25	20	18	2	10	13
1.44241.30	30	20	11	2	10	-	1.44246.30	30	20	18	2	10	13
1.44241.35	35	20	11	2	10	-	1.44246.35	35	20	18	2	10	13
1.44242.15	15	20	11	-	10	-	-	-	-	-	-	-	-

29

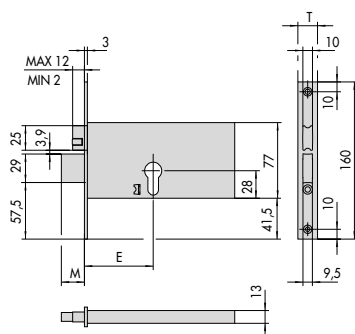


E	T	M
1.44370.70	70	16 19
1.44370.80	80	16 19
1.44370.90	90	16 19
1.44371.70	70	20 19
1.44371.80	80	20 19
1.44371.90	90	20 19

32

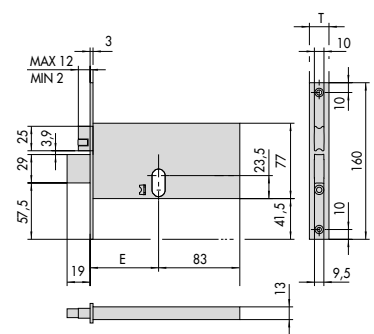


E	T
1.44470.70	70 16
1.44470.80	80 16
1.44470.90	90 16
1.44471.70	70 20
1.44471.80	80 20
1.44471.90	90 20

35

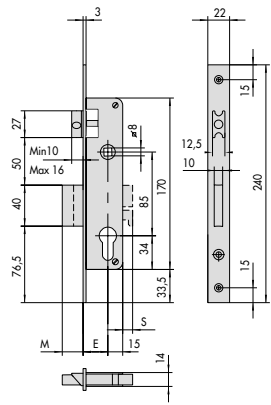


E	M	E	M	S		
1.44660.20	21	15	1.44665.20	21	20	8,5
1.44660.25	25	15	1.44665.25	25	20	8,5
1.44660.30	30	15	1.44665.30	30	20	8,5
1.44660.35	35	15	1.44665.35	35	20	8,5
1.44650.20	21					
1.44650.25	25					
1.44650.30	30					
1.44650.35	35					

36




45010, 45012, 45027

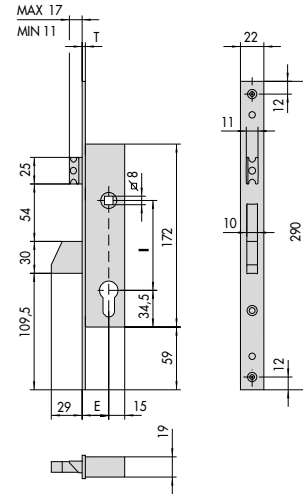

I	T	
46215	85	3
46217	85	3
46218	92	5
46219	92	3
E = 25 - 30 - 35		


39

42

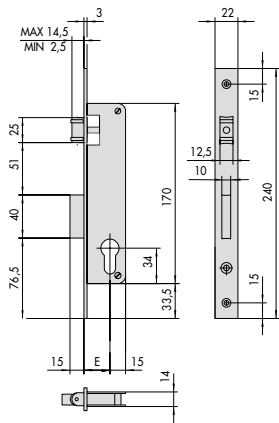


E	
1.44670.20	21
1.44670.25	25
1.44670.30	30
1.44670.35	35

37

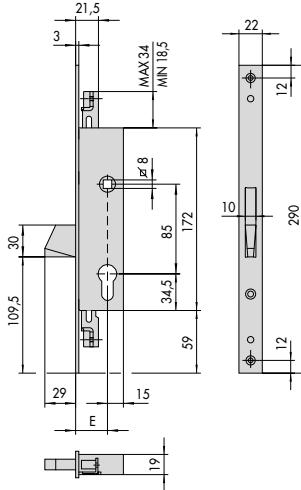


46200
E = 25 - 30 - 35

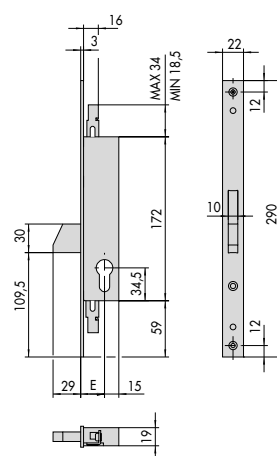

46220, 46222
E = 25 - 30 - 35


40

43

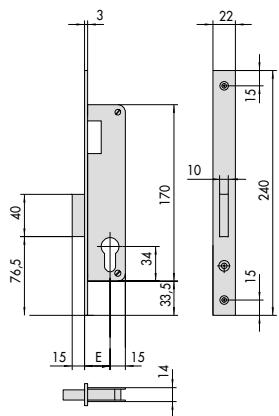


E	
1.44680.20	21
1.44680.25	25
1.44680.30	30
1.44680.35	35

38

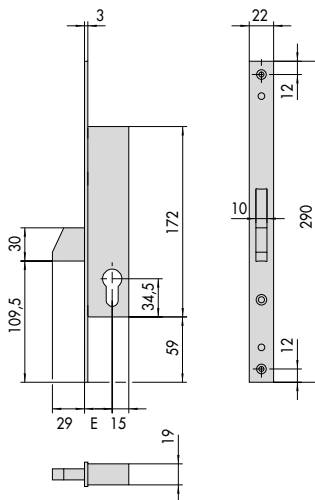


T	
46210	3
46212	3
46213	5
E = 25 - 30 - 35	

41

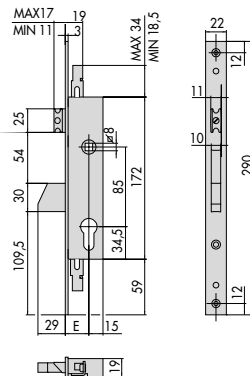


46225, 46227
E = 25 - 30 - 35


44

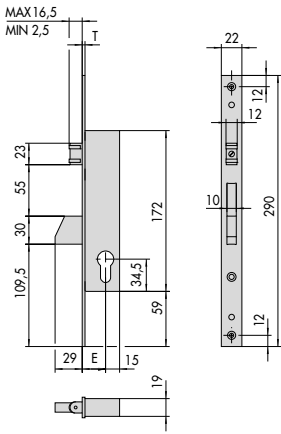

T
46230 3
46233 5
 E = 25 - 30 - 35

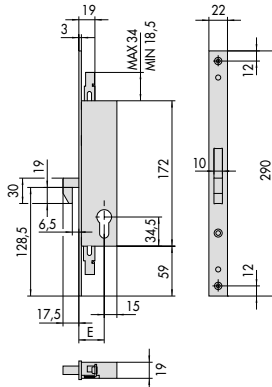

46260, 46262
 E = 25 - 30 - 35

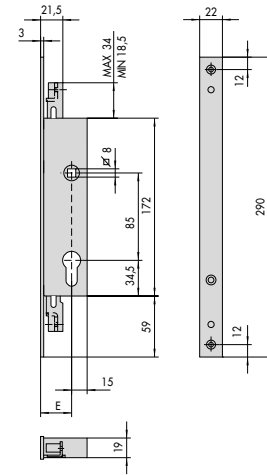


46275
 E = 25 - 30 - 35


45

48


51

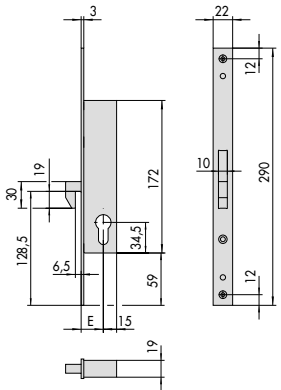

46240
 E = 25 - 30 - 35

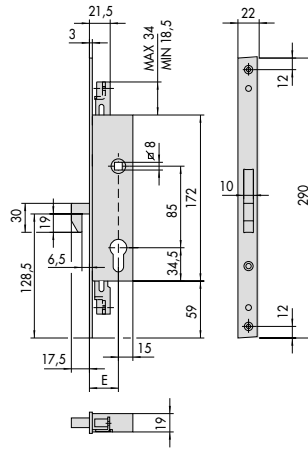

46265
 E = 25 - 30 - 35

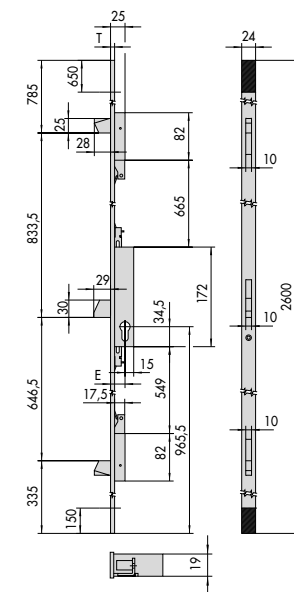


T
46420 7
46520 3
 E = 25 - 30 - 35


46

49


52

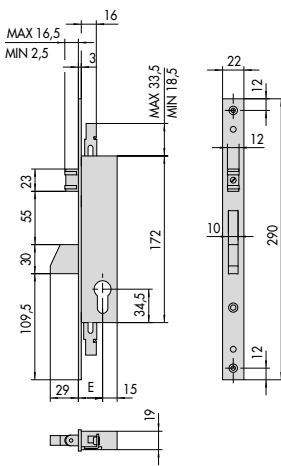

46250, 46252
 E = 25 - 30 - 35

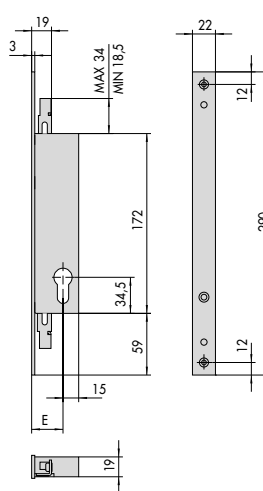

46270
 E = 25 - 30 - 35

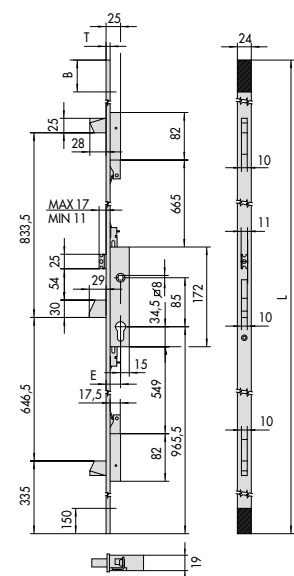


	L	T	B
46425	2600	7	650
46600	1920	7	
46625	2300	7	350
46525	2600	3	650
46700	1920	3	
46725	2300	3	350

E = 25 - 30 - 35


47

50


53

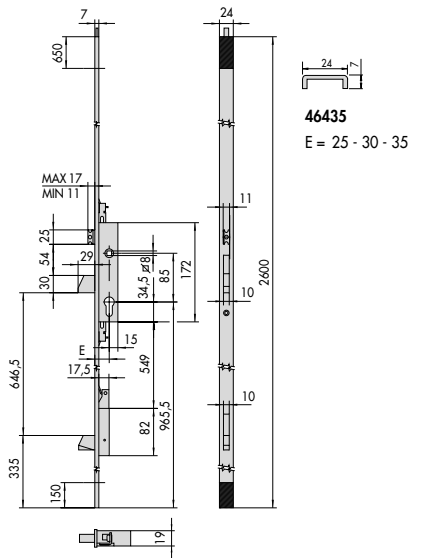


54

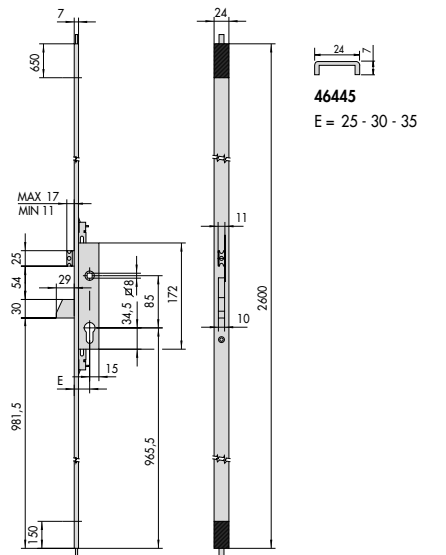


55

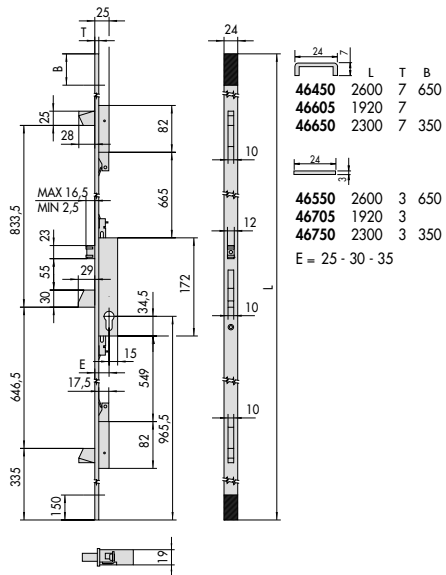


56

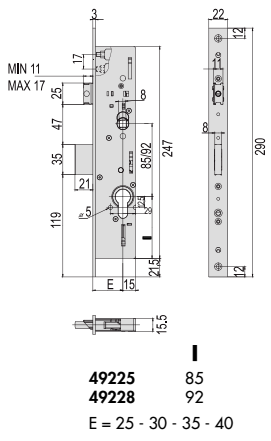


57

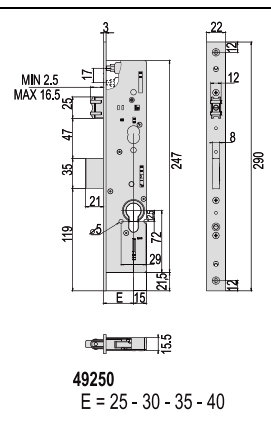


58

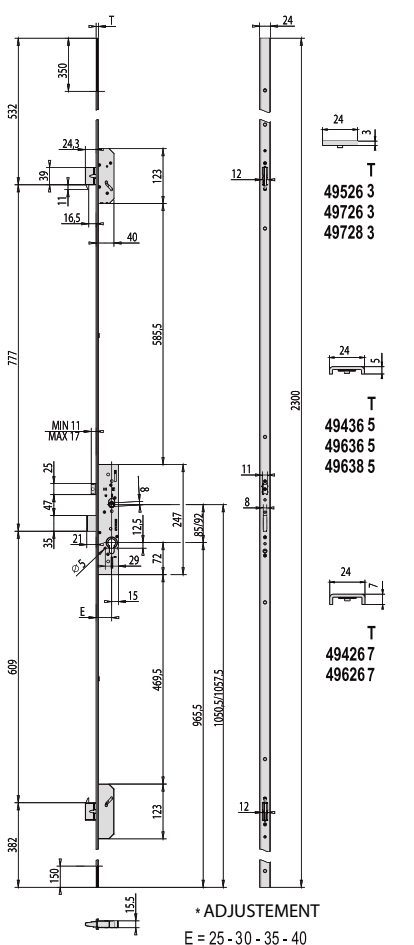


59

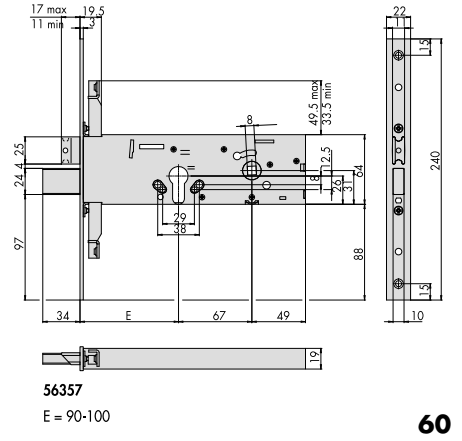


60

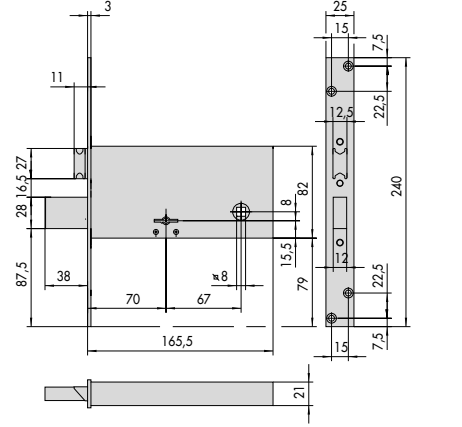


61

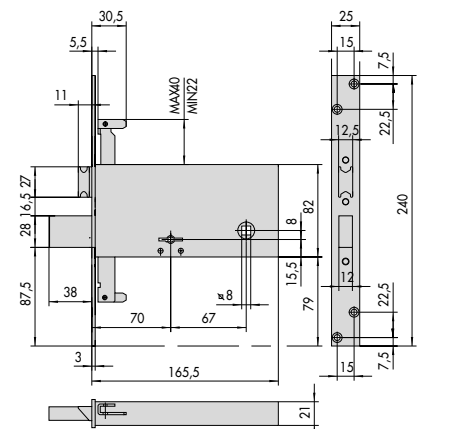


62

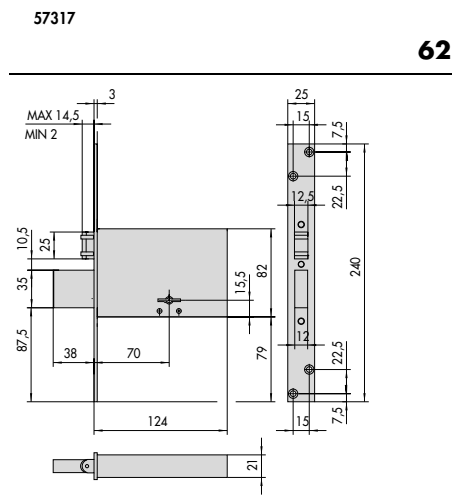

63

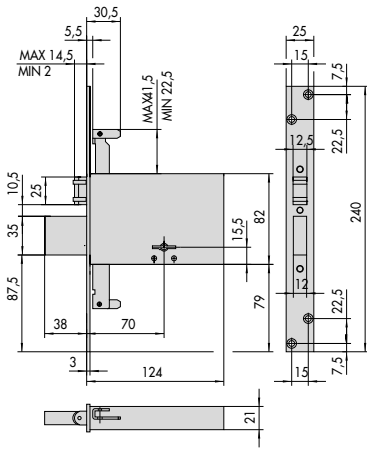


57325

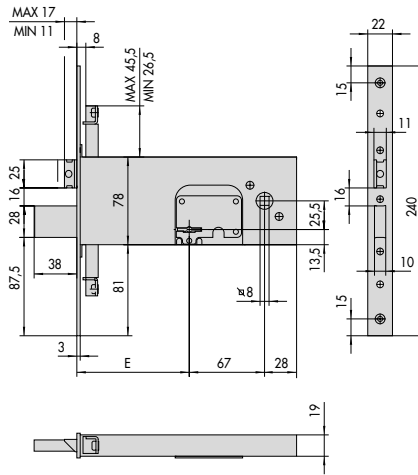

57357

E = 90 - 100

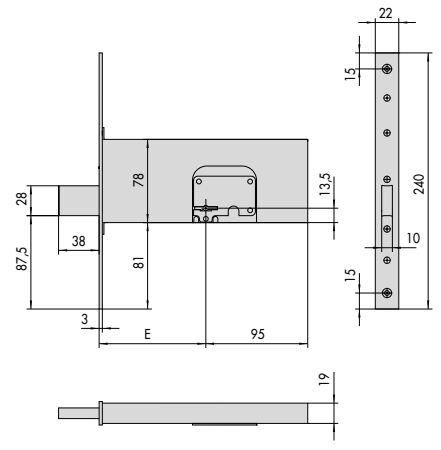


57370

E = 90 - 100


64

67

70

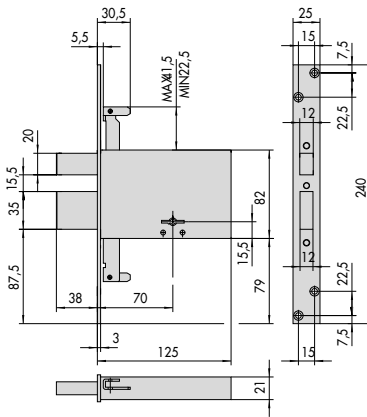


57335

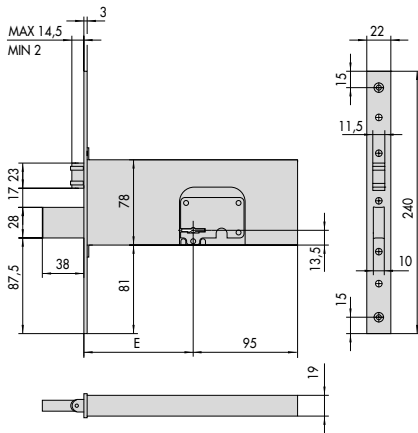

57360

E = 90 - 100

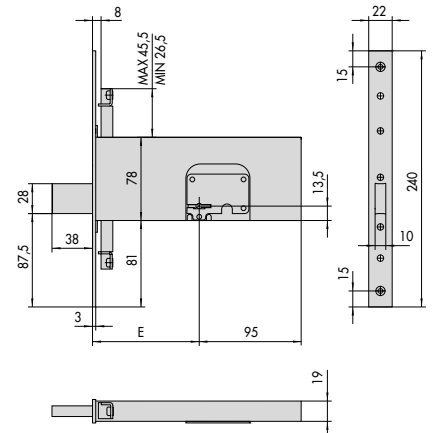


57375

E = 90 - 100

65


68

71

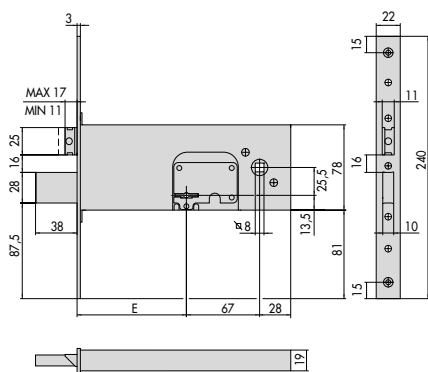


57352

E = 90 - 100

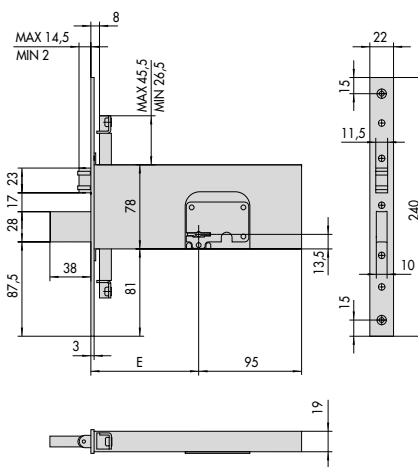

57365

E = 90 - 100

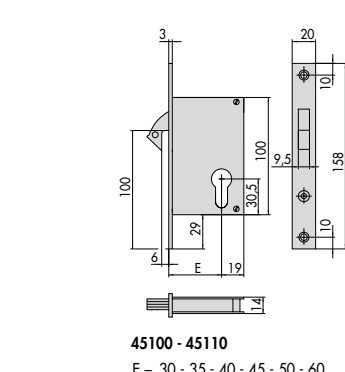

45100 - 45110

E = 30 - 35 - 40 - 45 - 50 - 60

66

69


72



Locks for wooden doors



Cylinder electric rim locks - Elettrika	265	Four-throw double-bit key or twin double-bit key mortice locks	296
Electric rim locks.....	266	Four-throw double-bit key mortice locks with multiple dead-bolt	298
Electric rim locks for heavy doors	268	Two-throw double-bit key mortice locks.....	300
Electric mortice locks.....	269	Two-throw double-bit key mortice locks with multiple dead-bolt	302
Electric strikers for mortice locks	270	Double-bit key rim locks	303
Electric striker for mortice locks	273	Multipoint cylinder mortice locks	305
Rim locks	274	Multipoint double-bit key mortice locks	309
Rim latches.....	278	Accessories for electric locks.....	312
Rim latches with opening limiting device.....	279	Accessories for cylinder rim locks	315
Multithrow cylinder rim locks	280	Accessories for cylinder mortice locks	316
Cylinder mortice locks	281	Accessories for Heavy Duty mortice locks	319
Cylinder mortice locks CISA Logo Line series.....	283	Accessories for double-bit key mortice locks.....	320
Cylinder mortice locks	284	Accessories for double-bit key rim locks	324
Cylinder mortice locks with multiple dead-bolt.....	286	Accessories for multipoint mortice locks	327
Four-throw cylinder mortice locks	287	Dimensional drawing	335
Heavy Duty cylinder mortice locks.....	288		
Cylinder mortice locks	292		
Handle sets mortice locks	293		





Technical features:

- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12 V ac CE
- Non-handed and with a variable backset from 50 to 80 mm
- Rated current 3A

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1

On request:

- Booster item 1.07022.00.0
- Booster plus item 1.07022.10.0
- BTicino coil item 1.07025.10.0
- Microswitch item 1.07023.00.0
- Open door indicator item 1.07126.01.0

Standards:

- ELETTRIKA is certified according to the European standard prEN 14846:08: Security degree 6 (2,000 Kg lateral thrust)

Hand:

0 = Non-handed

Elettrika

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	• Inner push-button		50-80	2,450	1	1	1A610	00	0		
		Art. 1 06500 00 0									
			50-80	2,350	1	1	1A611	00	0		
		Art. 1 06200 55 0									
	• Inner push-button • Hold open device • Brass rose		50-80	2,500	1	1	1A630	00	0		
		Art. 1 06115 00 0									
			50-80	2,350	1	1	1A631	00	0		
		Art. 1 06150 00 0									



Technical features:

- Steel case and striker, painted aluminium grey
- Dead-locking latch
- 12 V ac CE
- Rated current 2,5A

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1
- Fixing screws
- Instruction sheet


Standards:

- This electric lock series is certified according to the European standard EN 14846:06:
 - Security degree 3 (500 Kg lateral thrust and 200 Kg front load)

Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards
- 3 = R.H. outwards
- 4 = L.H. outwards

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.



- Inside push-button




1 02500 00 0

50	1,435	1	1	11610 50 1
50	1,440	1	1	11610 50 2
60	1,435	1	1	11610 60 1
60	1,445	1	1	11610 60 2
70	1,440	1	1	11610 70 1
70	1,450	1	1	11610 70 2
80	1,440	1	1	11610 80 1
80	1,440	1	1	11610 80 2



1 02552 50 0

50	1,445	1	1	11611 50 1
50	1,434	1	1	11611 50 2
60	1,440	1	1	11611 60 1
60	1,440	1	1	11611 60 2
70	1,445	1	1	11611 70 1
70	1,440	1	1	11611 70 2
80	1,439	1	1	11611 80 1
80	1,444	1	1	11611 80 2



- Inside push-button and cylinder
- Hold-open device



1 02104 00 0

50	1,538	1	1	11630 50 1
50	1,523	1	1	11630 50 2
60	1,533	1	1	11630 60 1
60	1,529	1	1	11630 60 2
70	1,500	1	1	11630 70 1
70	1,527	1	1	11630 70 2
80	1,536	1	1	11630 80 1
80	1,531	1	1	11630 80 2



1 02552 50 0

50	1,538	1	1	11631 50 1
50	1,538	1	1	11631 50 2
60	1,538	1	1	11631 60 1
60	1,538	1	1	11631 60 2
70	1,538	1	1	11631 70 1
70	1,538	1	1	11631 70 2

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM						
							Type	Dim.	Hand	Fin.	Pers.	Spec.	
<ul style="list-style-type: none"> • Manual throw dead-bolt • Inside push-button and cylinder 	<p>1 02146 00 0</p>	<p>1 02146 00 0</p>	2	50	1,656	1	1	11670	50	1			
			2	50	1,650	1	1	11670	50	2			
			2	60	1,660	1	1	11670	60	1			
			2	60	1,670	1	1	11670	60	2			
			2	70	1,670	1	1	11670	70	1			
			2	70	1,665	1	1	11670	70	2			
			2	80	1,675	1	1	11670	80	1			
			2	80	1,675	1	1	11670	80	2			
			<ul style="list-style-type: none"> • FOR OUTWARD OPENING DOORS • Inside push-button 	<p>1 02145 00 0</p>	<p>1 02145 00 0</p>	2	50	1,657	1	1	11671	50	1
						2	50	1,654	1	1	11671	50	2
2	60	1,667				1	1	11671	60	1			
2	60	1,666				1	1	11671	60	2			
2	70	1,664				1	1	11671	70	1			
2	70	1,670				1	1	11671	70	2			
2	80	1,678				1	1	11671	80	1			
2	80	1,679				1	1	11671	80	2			
<ul style="list-style-type: none"> • FOR OUTWARD OPENING DOORS • Inside push-button • Hold-open device 	<p>1 02104 00 0</p>	<p>1 02104 00 0</p>				50	1,490	1,490	1	1	11610	50	3
						50	1,490	1,490	1	1	11610	50	4
			60	1,494	1,494	1	1	11610	60	3			
			60	1,495	1,495	1	1	11610	60	4			
			70	1,496	1,496	1	1	11610	70	3			
			70	1,486	1,486	1	1	11610	70	4			
			80	1,492	1,492	1	1	11610	80	3			
			80	1,480	1,480	1	1	11610	80	4			
			<ul style="list-style-type: none"> • FOR OUTWARD OPENING DOORS • Inside push-button and cylinder • Hold-open device 	<p>1 02104 00 0</p>	<p>1 02104 00 0</p>	50	1,523	1,523	1	1	11630	50	3
						50	1,523	1,523	1	1	11630	50	4
60	1,529	1,529				1	1	11630	60	3			
60	1,529	1,529				1	1	11630	60	4			



Technical features:

- Steel case and striker, painted semi-opaque black
- Inside knob
- 12 V ac CE
- Rated current 0,8 A


Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards


Supplied as standard:

- Striker
- 3 keys item 1.01210.00.2
- Fixing screws
- Instruction sheet

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin.



- Inside knob
- Black painted, semi-opaque



1 02520 00 0

60	3,345	1	1	13010 60 1					
60	3,350	1	1	13010 60 2					
70	3,338	1	1	13010 70 1					
70	3,314	1	1	13010 70 2					
80	3,320	1	1	13010 80 1					
80	3,322	1	1	13010 80 2					
90	3,300	1	1	13010 90 1					
90	3,286	1	1	13010 90 2					
100	3,334	1	1	13010 10 1					
100	3,322	1	1	13010 10 2					
110	3,574	1	1	13010 11 1					
110	3,260	1	1	13010 11 2					
120	3,600	1	1	13010 12 1					
120	3,260	1	1	13010 12 2					



Technical features:

- Zinc plated steel case
- Satin brass faceplate and striking plate
- Reversible, electric latch
- 12 V ac CE
- Rated current 2,8 A

Supplied as standard:

- Electric contacts 1.06510.00.0
- Striking plate
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Satin nickel-plated brass (fin. 12)


Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Manual latch and dead-bolt
- SUPPLIED AS STANDARD:
Striking plate item 1.06035.00.0 (L=25 mm.)

2	22	40	0,997	1	1	12010	40	0		
2	22	50	1,040	1	1	12010	50	0		
2	22	60	1,130	1	1	12010	60	0		
2	22	70	1,138	1	1	12010	70	0		

- Manual latch and dead-bolt
- SUPPLIED AS STANDARD:
Striking plate item 1.06218.00.0 (L=37 mm.)

2	22	40	1,047	1	1	12015	40	0		
2	22	50	1,100	1	1	12015	50	0		
2	22	60	1,180	1	1	12015	60	0		
2	22	70	1,188	1	1	12015	70	0		

- Automatic latch and dead-bolt
- SUPPLIED AS STANDARD:
Striking plate item 1.06035.00.0 (L=25 mm.)

2	22	40	0,975	1	1	12011	40	0		
2	22	50	1,055	1	1	12011	50	0		
2	22	60	1,144	1	1	12011	60	0		
2	22	70	1,215	1	1	12011	70	0		

- Automatic latch and dead-bolt
- SUPPLIED AS STANDARD:
Striking plate item 1.06218.00.0 (L=37 mm.)

2	22	40	1,047	1	1	12016	40	0		
2	22	50	1,116	1	1	12016	50	0		
2	22	60	1,180	1	1	12016	60	0		
2	22	70	1,255	1	1	12016	70	0		



Technical features:

- Rated voltage 12-24V ac and 12-24V dc CE.
- Long lipped ZAL stainless alloy casing
- Steel or stainless steel interchangeable faceplates

Supplied as standard:

- Faceplate fixing screws

Finishes:

- gold painted fin. 06
- silver painted fin. 07
- Nickel-plated fin. 12
- Brass painted fin. 38
- Stainless steel fin. 20

Hand:

0 = Non-handed


1 = R.H. inwards

L.H. outwards

2 = L.H. inwards

R.H. outwards

Type	Description	Faceplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.



- Electric striker casing
- Voltage 12V ac CE - Current absorption 0,7 A
- Hold open catch mechanism
- Hold open device

0,185 12 1 15100 00 0

- Electric striker casing
- Voltage 12V ac CE - Current absorption 0,7A
- Hold open catch mechanism

0,185 12 1 15101 00 0

- Electric striker casing
- Voltage 12V ac/dc CE - Current absorption 0,7A
- Hold open device

0,185 12 1 15102 00 0

- Electric striker casing
- Voltage 12V ac/dc CE - Current absorption 0,7A

0,185 12 1 15110 00 0

- Electric striker casing
- Voltage 24V ac CE - Current absorption 0,4A
- Hold open catch mechanism
- Hold open device

0,185 12 1 15120 00 0

- Electric striker casing
- Voltage 24V ac CE - Current absorption 0,4A
- Hold open catch mechanism

0,185 12 1 15121 00 0

- Electric striker casing
- Voltage 24V ac/dc CE- Current absorption 0,4A
- Hold open device

0,185 12 1 15122 00 0


- Electric striker casing
- Voltage 24V ac/dc CE- Current absorption 0,4A

0,185 12 1 15130 00 0

- Electric striker casing
- Live coils: opening is only obtained if power supply is cut
- Voltage 12V dc CE - Current absorption 0,20A


0,185 12 1 15140 00 0

Type	Description	Faceplate Kg	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 24V dc CE - Current absorption 0,12A 	0,185	12	1	15150	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Inside hold open catch mechanism 	0,185	12	1	15160	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V dc CE - Current absorption 0,25A 	0,185	12	1	15170	00	0	
	<ul style="list-style-type: none"> • Electric striker casing without coil • Hold open device 	0,170	12	1	15180	00	0	




- Electric striker casing
- 1 microswitch
- Voltage 10/24V ac/dc
- Current absorption 0,24A a 10V cc

0,280 12 1 15200 00 0






- Square corners flat steel faceplate
- FINISHES
 - gold fin. 06
 - silver fin. 07
 - nickel plated fin. 12
 - brass painted fin. 38

25 0,092 12 1 05001 00 0 06
 25 0,092 12 1 05001 00 0 07
 25 0,092 12 1 05001 00 0 12
 25 0,092 12 1 05001 00 0 38



- Square corners flat steel faceplate
- FINISHES
 - gold fin. 06
 - silver fin. 07
 - satin finished s. steel fin. 20
 - brass painted fin. 38

25 0,083 12 1 05002 00 1 06
 25 0,083 12 1 05002 00 2 06
 25 0,083 12 1 05002 00 1 07
 25 0,083 12 1 05002 00 2 07
 25 0,083 12 1 05002 00 1 20
 25 0,083 12 1 05002 00 2 20
 25 0,083 12 1 05002 00 1 38
 25 0,092 12 1 05002 00 2 38

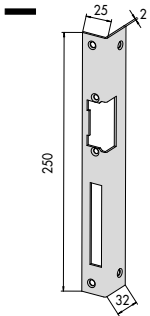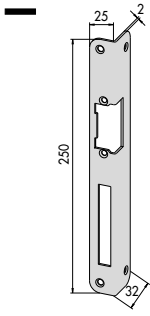Type	Description	Faceplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Square corners angular steel faceplate • FINISHES gold fin. 06 silver fin. 07 	25	0,160	12	1	05003	00	1	06
		25	0,160	12	1	05003	00	2	06
		25	0,160	12	1	05003	00	1	07
		25	0,160	12	1	05003	00	2	07
	<ul style="list-style-type: none"> • Round corner steel angle faceplate • FINISHES gold fin. 06 silver fin. 07 	25	0,160	1	1	05004	00	1	06
		25	0,160	12	1	05004	00	2	06
		25	0,160	12	1	05004	00	1	07
		25	0,160	12	1	05004	00	2	07
	<ul style="list-style-type: none"> • Square corner steel flat faceplate compatible with latch only locks • FINISHES gold fin. 06 silver fin. 07 nickel-plated fin. 12 brass lacquered fin. 38 satin finished stainless steel fin. 20 	25	0,070	6	1	05005	00	0	06
		25	0,070	12	1	05005	00	0	07
		25	0,070	12	1	05005	00	0	12
		25	0,070	12	1	05005	00	0	20
		25	0,070	12	1	05005	00	0	38



Technical features:

- ZAl stainless alloy asymmetrical casing
- Power input 12V
- effect painted steel faceplate.
- Hold-open device
- Hold-open catch mechanism

Hand:
0 = Non-handed

Supplied as standard:

- Instruction sheet

Finishes:

- gold effect (fin.06)
- silver effect (fin.07)

Type	Description	Faceplate	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.

	<ul style="list-style-type: none"> • Non-handed flat faceplate • For locks series 5C000, 53000, 56000, 57200, 57800 	25	0,330	1	1	15001	00	0	06
		25	0,340	1	1	15001	00	0	07

	<ul style="list-style-type: none"> • Non-handed flat faceplate • For locks series 5C000, 53000, 56000, 57200, 57800 	25	0,302	1	1	15005	00	0	06
		25	0,305	1	1	15005	00	0	07



Technical features:

- Steel case and striker, painted amaranth red
- Brass latch and dead-bolt
- Brass draw-back pull and knob


Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1
- Fixing screws

Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards

Type	Description	Cylinder	Throws	Backset	Unit weight	Pieces	ITEM			
							Type	Dim.	Hand	Fin.



- Inside draw-back pull and knob
- Dead-bolt and latch




1 02500 00 0

2	40	0,893	1	1	50110	40	1			
2	40	0,893	1	1	50110	40	2			
2	50	0,950	1	1	50110	50	1			
2	50	0,950	1	1	50110	50	2			
2	60	1,025	1	1	50110	60	1			
2	60	1,025	1	1	50110	60	2			
2	70	1,100	1	1	50110	70	1			
2	70	1,083	1	1	50110	70	2			



1 02552 50 0

2	40	0,890	1	1	50111	40	1			
2	40	0,890	1	1	50111	40	2			
2	50	0,960	1	1	50111	50	1			
2	50	0,954	1	1	50111	50	2			
2	60	1,039	1	1	50111	60	1			
2	60	1,039	1	1	50111	60	2			
2	70	1,100	1	1	50111	70	1			
2	70	1,100	1	1	50111	70	2			



- Inside draw-back pull and cylinder
- Dead-bolt and latch



1 02102 00 0















2	40	0,890	1	1	50120	40	1			
2	40	0,890	1	1	50120	40	2			
2	50	0,960	1	1	50120	50	1			
2	50	0,950	1	1	50120	50	2			
2	60	1,030	1	1	50120	60	1			
2	60	1,030	1	1	50120	60	2			
2	70	1,100	1	1	50120	70	1			
2	70	1,100	1	1	50120	70	2			











1 02106 00 0

2	40	0,890	1	1	50121	40	1			
2	40	0,890	1	1	50121	40	2			
2	50	0,950	1	1	50121	50	1			
2	50	0,960	1	1	50121	50	2			
2	60	1,010	1	1	50121	60	1			
2	60	1,010	1	1	50121	60	2			
2	70	1,100	1	1	50121	70	1			
2	70	1,100	1	1	50121	70	2			

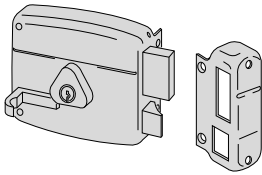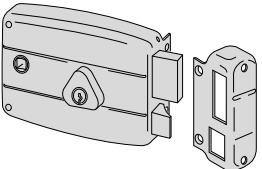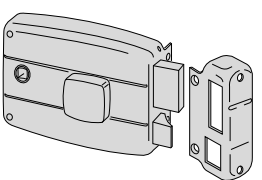Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Dead-bolt and latch 		3	60	1,075	1	1	50125	60	1
			3	60	1,075	1	1	50125	60	2
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 		3	60	1,080	1	1	50126	60	1
			3	60	1,080	1	1	50126	60	2
			3	70	1,150	1	1	50126	70	1
			3	70	1,150	1	1	50126	70	2
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 		2	40	0,820	1	1	50130	40	1
			2	40	0,820	1	1	50130	40	2
			2	50	0,880	1	1	50130	50	1
			2	50	0,880	1	1	50130	50	2
			2	60	0,945	1	1	50130	60	1
			2	60	0,950	1	1	50130	60	2
			2	70	1,000	1	1	50130	70	1
			2	70	1,000	1	1	50130	70	2
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 		2	40	0,820	1	1	50131	40	1
			2	40	0,820	1	1	50131	40	2
			2	50	0,875	1	1	50131	50	1
			2	50	0,875	1	1	50131	50	2
			2	60	0,950	1	1	50131	60	1
			2	60	0,950	1	1	50131	60	2
			2	70	1,025	1	1	50131	70	1
			2	70	1,025	1	1	50131	70	2
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 		2	40	0,820	1	1	50141	40	1
			2	40	0,820	1	1	50141	40	2
			2	50	0,880	1	1	50141	50	1
			2	50	0,880	1	1	50141	50	2
			2	60	0,970	1	1	50141	60	1
			2	60	0,960	1	1	50141	60	2
			2	70	1,030	1	1	50141	70	1
			2	70	1,035	1	1	50141	70	2
	<ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Dead-bolt and latch 		2	40	0,890	1	1	50160	40	1
			2	40	0,890	1	1	50160	40	2
			2	50	0,960	1	1	50160	50	1
			2	50	0,960	1	1	50160	50	2
			2	60	1,020	1	1	50160	60	1
			2	60	1,020	1	1	50160	60	2

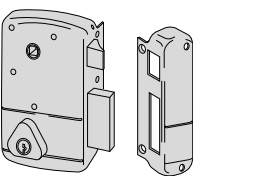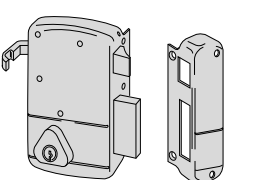Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM								
							Type	Dim.	Hand	Fin.	Pers.	Spec.			
 <ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Dead-bolt and latch 		 1 02102 00 0	2	40	0,890	1	1	50161	40	1					
			2	40	0,890	1	1	50161	40	2					
			2	50	0,960	1	1	50161	50	1					
			2	50	0,960	1	1	50161	50	2					
			2	60	1,020	1	1	50161	60	1					
			2	60	1,020	1	1	50161	60	2					
 <ul style="list-style-type: none"> • Inside cylinder • Dead-bolt and latch • Through spindle 		 1 02102 00 0	2	60	1,130	1	1	50170	60	1					
			2	60	1,130	1	1	50170	60	2					
		 1 02106 00 0	2	60	1,146	1	1	50171	60	1					
			2	60	1,160	1	1	50171	60	2					
			 <ul style="list-style-type: none"> • Inside knob • Dead-bolt and latch • Through spindle 		 1 02500 00 0	2	60	1,130	1	1	50180	60	1		
						2	60	1,130	1	1	50180	60	2		
 1 02552 50 0	2	60			1,150	1	1	50181	60	1					
	2	60			1,140	1	1	50181	60	2					
	 <ul style="list-style-type: none"> • Inside cylinder • Dead-bolt and latch • Through spindle 				 1 02102 00 0	2	45	1,200	1	1	50210	45	1		
						2	45	1,185	1	1	50210	45	2		
 1 02106 00 0			2	45	1,180	1	1	50211	45	1					
			2	45	1,180	1	1	50211	45	2					
			 <ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Dead-bolt and latch 		 1 02102 00 0	2	45	1,150	1	1	50220	45	1		
						2	45	1,140	1	1	50220	45	2		
 1 02106 00 0	2	45			1,130	1	1	50221	45	1					
	2	45			1,130	1	1	50221	45	2					

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
 <ul style="list-style-type: none"> • Lock case and striker painted in aluminium color • Nickel-plated draw-back pull and cylinder • Hold-open device 	 <p>1 02102 00 0</p>	2 50 0,960 1 1	50320 50 1								
		2 50 0,960 1 1	50320 50 2								
		2 60 1,030 1 1	50320 60 1								
		2 60 1,030 1 1	50320 60 2								
		 <ul style="list-style-type: none"> • Inside draw-back pull and knob • Dead-bolt and latch • Hold-open device 	 <p>1 02106 00 0</p>	2 50 0,950 1 1	50321 50 1						
				2 50 0,950 1 1	50321 50 2						
				2 60 1,050 1 1	50321 60 1						
				2 60 1,050 1 1	50321 60 2						
 <ul style="list-style-type: none"> • Inside draw-back pull and knob • Dead-bolt and latch • Hold-open device 	 <p>1 02500 00 0</p>	2 40 0,910 1 1	50330 40 1								
		2 40 0,910 1 1	50330 40 2								
		2 50 0,960 1 1	50330 50 1								
		2 50 0,960 1 1	50330 50 2								
		2 60 1,030 1 1	50330 60 1								
		2 60 1,030 1 1	50330 60 2								
		 <ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Dead-bolt and latch • Hold-open device 	 <p>1 02102 00 0</p>	2 40 0,910 1 1	50340 40 1						
				2 40 0,910 1 1	50340 40 2						
2 50 0,960 1 1	50340 50 1										
2 50 0,960 1 1	50340 50 2										
2 60 1,030 1 1	50340 60 1										
2 60 1,030 1 1	50340 60 2										



Technical features:

- Steel case and striker, painted amaranth red
- Brass latch, dead-bolt and draw-back pull
- PVC knobs

Hand:

0 = Non-handed

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1
- Fixing screws
- Instruction sheet

On request:

- STANDARD: painted amaranth red
- ON REQUEST: painted aluminium, with a nickel-plated cylinder (fin. 95)

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Inside knob • Latch-bolt only • Hold-open device 		60	0,659	1	1	54310	60	0	
			60	0,645	1	1	54311	60	0	
	<ul style="list-style-type: none"> • Inside knob • Latch-bolt only • Dead-locking latch with hold-open device 		60	0,663	1	1	54315	60	0	
			60	0,658	1	1	54316	60	0	
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 		2	60	0,700	1	1	54340	60	0
			2	60	0,673	1	1	54341	60	0



Technical features:

- Die-cast alloy case and striker
- Steel dead-bolt
- Steel limiting device
- Grey PVC knob
- Nickel-plated cylinder

Hand:

0 = Non-handed

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1
- Fixing screws
- Instruction sheet

Finishes:

- STANDARD: painted metallized aluminium, nickel plated cylinder

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pars.
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 	 1 02500 00 0	60	0,973	1	1	54510	60	0		
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only 	 1 02500 00 0	2	60	1,015	1	1	54550	60	0	
	<ul style="list-style-type: none"> • Inside cylinder • Fixed knob • Dead-bolt only 	 1 02130 00 0	2	60	1,040	1	1	54560	60	0	
	<ul style="list-style-type: none"> • Inside knob • Dead-bolt only • Opening limiting device 	 1 02500 00 0	2	60	1,061	1	1	54570	60	0	



Technical features:

- Purple red painted steel case, striker and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns


Hand:

1 = R.H. inwards

Supplied as standard:

- 3 keys item 1.01070.10.1
- Striker
- Fixing screws
- Brass roses

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.



• Dead-bolt only




1.0G500.00.0

6	50	1,345	1	1	55051	50	1
6	60	1,345	1	1	55051	60	1



0G200

6	50	1,250	1	1	55054	50	1
6	60	1,335	1	1	55054	60	1



• Dead-bolt and latch



1.0G500.00.0

6	50	1,345	1	1	55071	50	1
6	60	1,345	1	1	55071	60	1



0G200

6	50	1,335	1	1	55074	50	1
6	60	1,335	1	1	55074	60	1



Technical features:

- Black painted steel case and cover
- Removable brass faceplate and striker
- Reversible brass latch
- Roller can be adjusted from 2 to 13 mm
- Double-throw brass dead-bolt single-throw dead-bolt for bathroom doors.
- Can be fitted with: escutcheons, roses, handle plates and through screws

Supplied as standard:

- Striker
- Fixing screws for lock, striker and cylinder

Finishes:

- ON REQUEST:
 - Satin nickel plated brass (Fin. 12)
 - Stainless steel (Fin. 20)
 - Polished lacquered brass (Fin. 67)

Hand:


0 = Non-handed

Cylinder to be ordered separately




TO BE DISCONTINUED

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06102.13.0

2	85	22	35	0,640	1	1	5C110 35 0				
2	85	22	40	0,706	1	1	5C110 40 0				
2	85	22	45	0,734	1	1	5C110 45 0				
2	85	22	50	0,760	1	1	5C110 50 0				
2	85	22	60	0,800	1	1	5C110 60 0				
2	85	22	70	0,866	1	1	5C110 70 0				




- Dead-bolt and latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06279.11.0

2	85	22	35	0,680	1	1	5C130 35 0				
2	85	22	40	0,706	1	1	5C130 40 0				
2	85	22	45	0,734	1	1	5C130 45 0				
2	85	22	50	0,750	1	1	5C130 50 0				
2	85	22	60	0,800	1	1	5C130 60 0				
2	85	22	70	0,866	1	1	5C130 70 0				



- Roller dead-bolt
- SUPPLIED AS STANDARD:
Striking plate item 1.06149.00.0


2	22	35	0,630	1	1	5C120 35 0					
2	22	40	0,680	1	1	5C120 40 0					
2	22	45	0,700	1	1	5C120 45 0					
2	22	50	0,740	1	1	5C120 50 0					
2	22	60	0,750	1	1	5C120 60 0					
2	22	70	0,800	1	1	5C120 70 0					



- Roller dead-bolt
- SUPPLIED AS STANDARD:
Striking plate


2	22	35	0,630	1	1	5C140 35 0					
2	22	40	0,680	1	1	5C140 40 0					
2	22	45	0,700	1	1	5C140 45 0					
2	22	50	0,740	1	1	5C140 50 0					
2	22	60	0,750	1	1	5C140 60 0					
2	22	70	0,800	1	1	5C140 70 0					

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim. Hand	Fin.	Pers. Spec.



- For bathroom doors
- Dead-bolt and latch
- 8 mm spindle
- SUPPLIED AS STANDARD:
Striking plate item 1.06102.13.0

1	85	22	40	0,690	1	1	5C150	40	0
1	85	22	45	0,730	1	1	5C150	45	0
1	85	22	50	0,750	1	1	5C150	50	0
1	85	22	60	0,810	1	1	5C150	60	0
1	85	22	70	0,890	1	1	5C150	70	0



- For bathroom doors
- Dead-bolt and latch
- 8 mm spindle
- SUPPLIED AS STANDARD:
Striking plate item 1.06279.11.0

1	85	22	35	0,650	1	1	5C170	35	0
1	85	22	40	0,690	1	1	5C170	40	0
1	85	22	45	0,730	1	1	5C170	45	0
1	85	22	50	0,750	1	1	5C170	50	0
1	85	22	60	0,810	1	1	5C170	60	0
1	85	22	70	0,890	1	1	5C170	70	0



Technical features:

- Zinc-plated steel case
- Dismountable faceplate and brass-plated steel strike plate
- Bi-conic reversible latch
- Adjustable brass roller from 2 to 13 mm.
- 2-throw steel deadbolt; 1-throw version for bathroom doors
- Pre-arranged for installation of roses, escutcheons, through-screw handle plates.

Supplied as standard:

- Strike plate
- Fixing screws for lock, striker and cylinder

Finishes:

- Finishes available at no extra charge:
 - brass-plated satin steel (Fin. B3)
 - nickel-plated steel (Fin. 12)
 - bronze-plated steel (Fin. 47)
- Finishes available at an extra charge:
 - Matt chrome-plated steel (Fin. B1)

Hand:

0 = Non-handed


Cylinder to be ordered separately



TO BE DISCONTINUED




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- SUPPLIED AS STANDARD:
- Striking plate item 1.06102.10.0

2	85	22	35	0,630	1	1	5C611	35	0			
2	85	22	40	0,660	1	1	5C611	40	0			
2	85	22	45	0,682	1	1	5C611	45	0			
2	85	22	50	0,720	1	1	5C611	50	0			
2	85	22	60	0,775	1	1	5C611	60	0			
2	85	22	70	0,820	1	1	5C611	70	0			




- Dead-bolt and latch
- SUPPLIED AS STANDARD:
- Striking plate item 1.06100.10.0

2	85	22	35	0,682	1	1	5C631	35	0			
2	85	22	40	0,695	1	1	5C631	40	0			
2	85	22	45	0,737	1	1	5C631	45	0			
2	85	22	50	0,755	1	1	5C631	50	0			
2	85	22	60	0,820	1	1	5C631	60	0			
2	85	22	70	0,874	1	1	5C631	70	0			




- Roller dead-bolt
- SUPPLIED AS STANDARD:
- Striking plate item 1.06102.10.0

2	85	22	35	0,613	1	1	5C621	35	0			
2	85	22	40	0,670	1	1	5C621	40	0			
2	85	22	45	0,730	1	1	5C621	45	0			
2	85	22	50	0,760	1	1	5C621	50	0			
2	85	22	60	0,790	1	1	5C621	60	0			
2	85	22	70	0,850	1	1	5C621	70	0			




- Roller dead-bolt
- SUPPLIED AS STANDARD:
- Striking plate item 1.06100.10.0

2	85	22	35	0,613	1	1	5C641	35	0			
2	85	22	40	0,670	1	1	5C641	40	0			
2	85	22	45	0,730	1	1	5C641	45	0			
2	85	22	50	0,760	1	1	5C641	50	0			
2	85	22	60	0,790	1	1	5C641	60	0			
2	85	22	70	0,850	1	1	5C641	70	0			



- For bathroom doors
- Dead-bolt and latch
- SUPPLIED AS STANDARD:
- Striking plate item 1.06102.10.0

1	85	22	35	0,630	1	1	5C651	35	0			
1	85	22	40	0,660	1	1	5C651	40	0			
1	85	22	45	0,682	1	1	5C651	45	0			
1	85	22	50	0,720	1	1	5C651	50	0			
1	85	22	60	0,775	1	1	5C651	60	0			
1	85	22	70	0,820	1	1	5C651	70	0			



- For toilet doors
- Dead-bolt and latch
- SUPPLIED AS STANDARD:
- Striking plate item 1.06100.10.0

1	85	22	35	0,682	1	1	5C671	35	0			
1	85	22	40	0,695	1	1	5C671	40	0			
1	85	22	45	0,737	1	1	5C671	45	0			
1	85	22	50	0,755	1	1	5C671	50	0			
1	85	22	60	0,820	1	1	5C671	60	0			
1	85	22	70	0,874	1	1	5C671	70	0			

TO BE DISCONTINUED

TO BE DISCONTINUED



Technical features:

- Faceplate and striking plate: in both satin brass and brass plated satin steel version
- Zinc plated steel case
- Reversible latch
- Roller can be adjusted from 2,5 ÷ 14,5 mm.
- Aligned deadbolt 10 mm thick
- Case cover to protect against dirt and chips

Hand:

0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Striking plate
- Lock and cylinder fixing screws

On request:

- Nickel-plated (Fin. 12)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.



REPLACING 52010 SERIES


- Satin brass faceplate
- Deadbolt and latch
- SUPPLIED AS STANDARD:
- Satin brass strike plate item 1.06163.00.0

1	85	22	21	0,492	1	1	5C010	20	0
1	85	22	25	0,506	1	1	5C010	25	0
1	85	22	30	0,557	1	1	5C010	30	0

REPLACING 52011 SERIES

- Satin brass steel faceplate
- Deadbolt and latch
- SUPPLIED AS STANDARD:
- Satin brass-plated steel strike plate item 1.06152.00.0


1	85	22	21	0,450	1	1	5C011	20	0
1	85	22	25	0,511	1	1	5C011	25	0
1	85	22	30	0,530	1	1	5C011	30	0



REPLACING 52021 SERIES

- Steel faceplate
- Deadbolt and satin brass adjustable roller
- SUPPLIED AS STANDARD:
- Satin brass-plated steel strike plate item 1.06162.00.0




1	22	21	0,446	1	1	5C021	20	0
1	22	25	0,473	1	1	5C021	25	0
1	22	30	0,505	1	1	5C021	30	0




REPLACING 52031 SERIES

- Satin brass-plated steel faceplate
- Deadbolt and latch
- SUPPLIED AS STANDARD:
- Satin brass-plated steel strike plate item 1.06243.00.0

1	85	22	21	0,500	1	1	5C031	20	0
1	85	22	25	0,530	1	1	5C031	25	0
1	85	22	30	0,570	1	1	5C031	30	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers. Spec.	
 <ul style="list-style-type: none"> • Satin brass faceplate • Deadbolt only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.07032.00.0 		1	22	25	0,360	1	1	52210	25	0			
		1	22	30	0,380	1	1	52210	30	0			
 <ul style="list-style-type: none"> • Satin brass faceplate • Latch only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.06107.00.0 			22	60	0,439	1	1	52300	60	0			
 <ul style="list-style-type: none"> • Satin brass faceplate • Deadbolt only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.07032.00.0 		2	22	35	0,410	1	1	52310	35	0			
		2	22	40	0,430	1	1	52310	40	0			
		2	22	45	0,451	1	1	52310	45	0			
		2	22	50	0,470	1	1	52310	50	0			
		2	22	60	0,500	1	1	52310	60	0			
		2	22	70	0,530	1	1	52310	70	0			



Technical features:


- Painted brass plated satin steel faceplate and striking plate
- Zinc plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel triple bolt

Supplied as standard:


- Striker
- Cylinder fixing screws

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06279.12.0

2	85	22	45	0,805	1	1	52520	45	0		
2	85	22	50	0,835	1	1	52520	50	0		
2	85	22	60	0,915	1	1	52520	60	0		




- Dead-bolt and latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06278.11.0

2	85	22	45	0,800	1	1	52521	45	0		
2	85	22	50	0,840	1	1	52521	50	0		
2	85	22	60	0,905	1	1	52521	60	0		



- Dead-bolt and latch
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Striking plate item 1.06284.00.0
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0

2	85	25	45	1,145	1	1	52526	45	0		
2	85	25	50	1,180	1	1	52526	50	0		
2	85	25	60	1,245	1	1	52526	60	0		



Technical features:


- Nickel-plated satin steel faceplate and striking plate
- Zinc plated steel case
- Reversible, nickel-plated latch
- Four throw, nickel-plated steel bolt

Supplied as standard:


- Striking plate
- Lock and cylinder fixing screws

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.

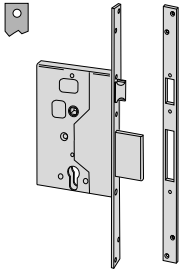

- Dead-bolt and latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06271.00.0

4	85	25	60	1,300	1	1 56250 60 0
---	----	----	----	-------	---	--------------

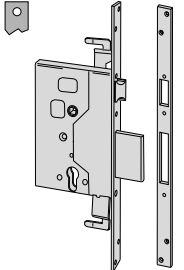

- Dead-bolt and latch
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Striking plate item 1.06272.00.0
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0

4	85	25	60	1,535	1	1 56255 60 0
---	----	----	----	-------	---	--------------



Technical features:

- Laquered polished brass removable faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated silent action latch
- Nickel-plated bolt for latch dead-locking (if provided)
- Nickel-plated cut-resistant dead-bolt, with a 25 mm. protrusion
- Anti-corrosion galvanised internal components

Supplied as standard:

- Striking plate
- Fixing screws
- Instruction sheet

Finishes:

- ON REQUEST: Satin stainless steel faceplate and striker (fin 20)





Standards:






- Locks with satin stainless steel faceplate and striker (finish 20), are certified fire-resistant by the American Underwrite Laboratories (UL LISTED R 14945(N))
- CE mark in compliance with the directive 89/106/CEE, only for item with (fin. 20)
- Standard reference:
 - UNI EN 179
 - UNI EN 1125
 - UNI EN 12209






Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.
 <ul style="list-style-type: none"> • For entrance doors • Dead-bolt and dead-locking latch • OPERATION: the latch-bolt is operated by handle or cylinder from either side The dead-bolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striking plate item 1.06106.20.0 	1	85	22	60	0,910	1	1	52710	60	0	
	1	85	22	70	1,000	1	1	52710	70	0	
	1	85	22	80	1,050	1	1	52710	80	0	
	1	85	22	90	1,100	1	1	52710	90	0	
 <ul style="list-style-type: none"> • For entrance doors • Dead-bolt and dead-locking latch • OPERATION: the latch-bolt is operated by handle or cylinder from either side The dead-bolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striking plate item 1.06106.25.0 	1	85	22	60	0,950	1	1	52711	60	0	
	1	85	22	70	1,000	1	1	52711	70	0	
	1	85	22	80	1,050	1	1	52711	80	0	
	1	85	22	90	1,100	1	1	52711	90	0	
 <ul style="list-style-type: none"> • For bathroom • Dead-bolt and latch • OPERATION: the latch-bolt is operated by handle from either side The dead-bolt is operated by a 8 mm spindle • SUPPLIED AS STANDARD: Square striking plate item 1.06155.20.0 	1	85	22	60	0,950	1	1	52730	60	0	
	1	85	22	70	1,000	1	1	52730	70	0	
	1	85	22	80	1,050	1	1	52730	80	0	
	1	85	22	90	1,100	1	1	52730	90	0	
 <ul style="list-style-type: none"> • For bathroom • Dead-bolt and latch • OPERATION: the latch-bolt is operated by handle from either side The dead-bolt is operated by a 8 mm spindle • SUPPLIED AS STANDARD: Round striking plate item 1.06155.25.0 	1	85	22	60	0,950	1	1	52731	60	0	
	1	85	22	60	1,000	1	1	52731	70	0	
	1	85	22	80	1,050	1	1	52731	80	0	
	1	85	22	90	1,100	1	1	52731	90	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim. Hand	Fin.	Pers.	Spec.
 <ul style="list-style-type: none"> • For passage doors • Latch-bolt only • OPERATION: The latch-bolt is operated by handle from either side • SUPPLIED AS STANDARD: Square striking plate item 1.06156.20.0 	22 60 0,900 1	1 52750 60 0										
	22 70 1,000 1	1 52750 70 0										
	22 80 0,835 1	1 52750 80 0										
	22 90 1,100 1	1 52750 90 0										
 <ul style="list-style-type: none"> • For passage doors • Latch-bolt only • OPERATION: The latch-bolt is operated by handle from either side • SUPPLIED AS STANDARD: Round striking plate item 1.06156.25.0 	22 60 0,900 1	1 52751 60 0										
	22 70 1,000 1	1 52751 70 0										
	22 80 1,000 1	1 52751 80 0										
	22 90 1,100 1	1 52751 90 0										
 <ul style="list-style-type: none"> • For external doors • Dead-locking latch-bolt only • OPERATION: The latch-bolt is operated by handle or cylinder from either side The outside handle must be de-activated • SUPPLIED AS STANDARD: Square striking plate item 1.06158.20.0 	85 22 60 0,900 1	1 52755 60 0										
	85 22 70 1,000 1	1 52755 70 0										
	85 22 80 1,050 1	1 52755 80 0										
	85 22 90 1,100 1	1 52755 90 0										
 <ul style="list-style-type: none"> • For external doors • Dead-locking latch-bolt only • OPERATION: The latch-bolt is operated by handle or cylinder from either side The outside handle must be de-activated • SUPPLIED AS STANDARD: Round striking plate item 1.06158.25.0 	85 22 60 0,950 1	1 52756 60 0										
	85 22 70 1,000 1	1 52756 70 0										
	85 22 80 1,050 1	1 52756 80 0										
	85 22 90 1,100 1	1 52756 90 0										
 <ul style="list-style-type: none"> • FUNCTION TYPE B: • For panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be deactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or the panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains deactivated after the door is closed (in stand-by) 	85 22 60 0,900 1	1 52760 60 0										
	85 22 70 1,000 1	1 52760 70 0										
	85 22 80 1,050 1	1 52760 80 0										
	85 22 90 1,050 1	1 52760 90 0										

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> • FUNCTION TYPE B: • For panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by) 	85	22	60	0,885	1	1	52761 60 0				
	85	22	70	1,000	1	1	52761 70 0				
	85	22	80	1,050	1	1	52761 80 0				
	85	22	90	1,100	1	1	52761 90 0				
 <ul style="list-style-type: none"> • For cabinet doors • Dead-bolt only • OPERATION: The dead-bolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striking plate item 1.06159.20.0 	1	22	60	0,950	1	1	52780 60 0				
	1	22	70	1,000	1	1	52780 70 0				
	1	22	80	1,050	1	1	52780 80 0				
	1	22	90	0,000	1	1	52780 90 0				
 <ul style="list-style-type: none"> • For cabinet doors • Dead-bolt only • OPERATION: The dead-bolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Round striking plate item 1.06159.25.0 	1	22	70	1,000	1	1	52781 60 0				
	1	22	70	1,000	1	1	52781 70 0				
	1	22	80	1,050	1	1	52781 80 0				
	1	22	90	1,100	1	1	52781 90 0				
 <ul style="list-style-type: none"> • FUNCTION TYPE A: for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Through square spindle • The deadbolt is automatically released when closing the door • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52840 60 0			
	1	85	22	70	1,000	1	1	52840 70 0			
	1	85	22	80	1,050	1	1	52840 80 0			
	1	85	22	90	1,100	1	1	52840 90 0			
 <ul style="list-style-type: none"> • FUNCTION TYPE A: for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Through square spindle • The deadbolt is automatically released when closing the door • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52860 60 0			
	1	85	22	70	1,000	1	1	52860 70 0			
	1	85	22	80	1,050	1	1	52860 80 0			
	1	85	22	90	1,100	1	1	52860 90 0			

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim. Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch and dead bolt with antipicking device • Through square spindle • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52842	60	0
		1	85	22	70	1,000	1	1	52842	70	0
		1	85	22	80	1,050	1	1	52842	80	0
		1	85	22	90	1,100	1	1	52842	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch and dead bolt with antipicking device • Through square spindle • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52862	60	0
		1	85	22	70	1,000	1	1	52862	70	0
		1	85	22	70	1,050	1	1	52862	80	0
		1	85	22	70	1,050	1	1	52862	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE D: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Split square spindle • Reversible panic function • Outside: the latch can be operated with the handle • Inside: latch and dead-bolt are operated with the handle or the panic exit device • The key operates only the dead-bolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the dead-bolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52844	60	0
		1	85	22	70	1,000	1	1	52844	70	0
		1	85	22	80	1,050	1	1	52844	80	0
		1	85	22	90	1,100	1	1	52844	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE D: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Split square spindle • Reversible panic function • Outside: the latch can be operated with the handle • Inside: latch and dead-bolt are operated with the handle or the panic exit device • The key operates only the dead-bolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the dead-bolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52864	60	0
		1	85	22	70	1,000	1	1	52864	70	0
		1	85	22	80	1,050	1	1	52864	80	0
		1	85	22	90	1,100	1	1	52864	90	0



Technical features:

- Satin lacquered brass faceplate and striker
- Semi-matt black lacquered steel case
- Reversible, nickel-plated latch
- Nickel-plated, antipicking bolt (if provided)
- Nickel-plated dead-bolt
- Can be fitted with: escutcheons, roses, handle plates and through screws
- Through-spindle

Hand:

0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Striker
- Striker and cylinder fixing screws

On request:


- Satin lacquered chrome-plated finish (fin. 18)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- FUNCTION TYPE A:
- FOR PANIC FUNCTION DOORS (for the suitable panic exit device to install, see the relevant catalogue)
- Dead-bolt and dead-locking latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06106.01.0
- ON REQUEST:
Faceplate 18x240 (pers. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1	52810 40 1
1	85	22	40	0,720	1	1	52810 40 2
1	85	22	45	0,760	1	1	52810 45 0
1	85	22	50	0,780	1	1	52810 50 0
1	85	22	60	0,840	1	1	52810 60 0
1	85	22	70	0,920	1	1	52810 70 0




- FUNCTION TYPE A:
- FOR PANIC FUNCTION DOORS (for the suitable panic exit device to install, see the relevant catalogue)
- Dead-bolt and dead-locking latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06106.05.0
- ON REQUEST:
Faceplate 18x240 (spec. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1	52830 40 1
1	85	22	40	0,720	1	1	52830 40 2
1	85	22	45	0,760	1	1	52830 45 0
1	85	22	50	0,780	1	1	52830 50 0
1	85	22	60	0,840	1	1	52830 60 0
1	85	22	70	0,920	1	1	52830 70 0




- FOR PASSAGE DOORS
- Latch bolt only
- Supplied as standard strikers

	85	22	60	0,790	1	1	52318 60 0
--	----	----	----	-------	---	---	------------



- FOR PASSAGE DOORS
- Latch bolt only
- Supplied as standard strikers

	85	22	60	0,790	1	1	52338 60 0
--	----	----	----	-------	---	---	------------

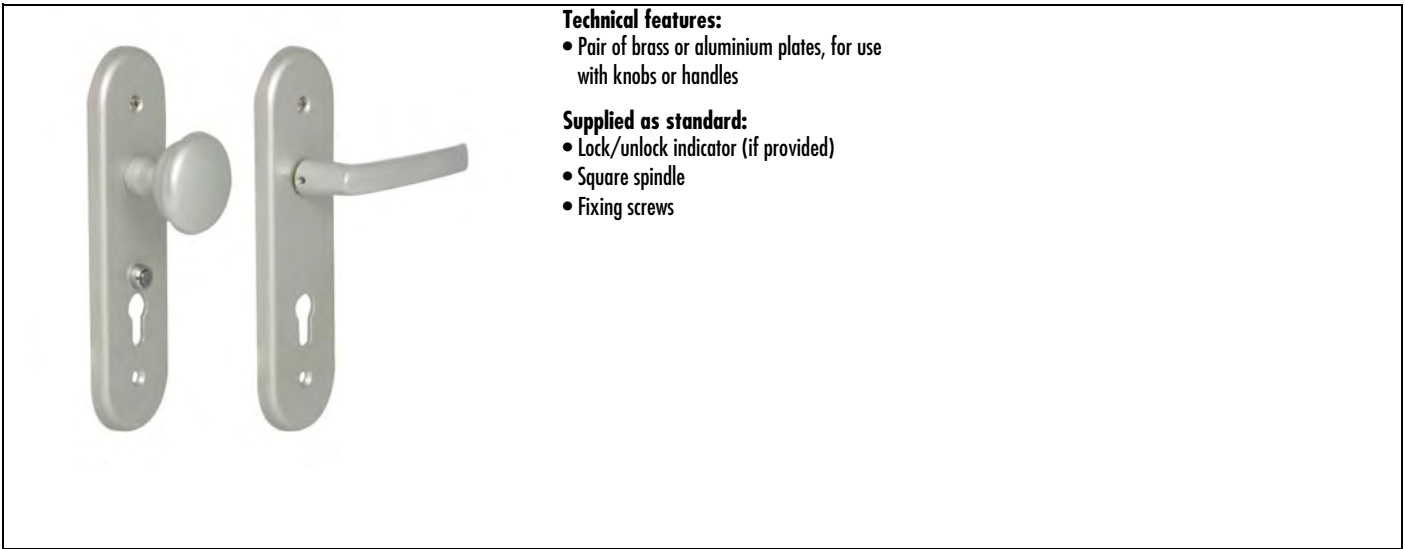


Technical features:

- Pair of brass or aluminium plates, for use with knobs or handles

Supplied as standard:


- Lock/unlock indicator (if provided)
- Square spindle
- Fixing screws

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim. Hand	Fin.	Pers. Spec.




- FOR ENTRANCE DOORS
- Pair of brass plates for knob/handle
- Lock/unlock indicator
- Finishes:
Polished brass
Polished chrome-plated (fin. 21)

85 0,850 1 1 30220 10 0



- FOR ENTRANCE DOORS: Pair of aluminium plates for knob/handle
- Lock/unlock indicator
- Finishes:
Anodized silver (fin. A3)
Anodized gold (fin. A6)

85 0,850 1 1 30210 10 0 A3




- FOR ENTRANCE DOORS
- Pair of aluminium plates for handle/handle
- Lock/unlock indicator
- Finishes:
Anodized silver (fin. A3)
Anodized gold (fin. A6)

85 0,950 1 1 30210 11 0 A3

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • FOR BATHROOM DOORS • Pair of brass plates for handle/handle • Narrow plate • Finishes: Polished brass Polished chrome-plated (fin 21) 	85		0,806	1	1	30220	20	0	
	<ul style="list-style-type: none"> • FOR BATHROOM DOORS • Pair of brass plates for handle/handle • Narrow plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85		0,806	1	1	30210	20	0	A3
	<ul style="list-style-type: none"> • FOR BATHROOM DOORS • Pair of brass plates for handle/handle • Large plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85		0,806	1	1	30210	21	0	A3
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Narrow plate • Finishes: Polished brass Polished chrome-plated (fin 21) 	85		0,700	1	1	30220	30	0	
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Narrow plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85		0,700	1	1	30210	30	0	A3
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Large plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85		0,700	1	1	30210	31	0	A3
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Large plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85		0,700	1	1	30210	31	0	A3

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim. Hand	Fin.	Peris. Spec.	
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Narrow plate • Finishes: Polished brass Polished chrome-plated (fin 21) 	85				0,780	1	1	30220	40	0	
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Narrow plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85				0,780	1	1	30210	40	0	A3
	<ul style="list-style-type: none"> • FOR PASSAGE DOORS • Pair of brass plates for handle/handle • Large plate • Finishes: Anodized silver (fin. A3) Anodized gold (fin. A6) 	85				0,780	1	1	30210	41	0	A3



Technical features:




- Nickel plated satin steel faceplate and striking plate
- Zinc plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel dead-bolt




Supplied as standard:




- Striking plate
- 2 escutcheons :
inside item 1.06143.00.0,
outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.

	<ul style="list-style-type: none"> • Dead-bolt only • SUPPLIED AS STANDARD: Striking plate item 1.06231.00.0 		4	25	52	1,150	1	1 57010 50 0						
			4	25	60	1,200	1	1 57010 60 0						
			4	25	70	1,250	1	1 57010 70 0						
					4	25	52	1,160	1	1 57010 51 0				
					4	25	60	1,310	1	1 57010 61 0				
					4	25	70	1,280	1	1 57010 71 0				

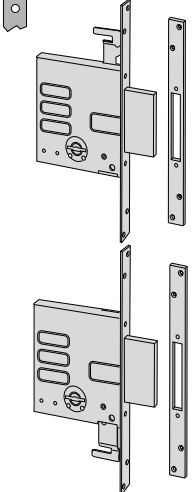	<ul style="list-style-type: none"> • Dead-bolt only • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: Striking plate item 1.06235.00.0 Two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 		4	25	60	1,385	1	1 57015 60 0							
			4	25	70	1,430	1	1 57015 70 0							
			4	25	60	1,410	1	1 57015 61 0							
					4	25	70	1,460	1	1 57015 71 0					

	<ul style="list-style-type: none"> • Pair of locks dead-bolt only • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: two strikers item 1.06235.00.0 two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: Extended bolts item 1.06416.00.0 Floor striker item 1.06086.00.0 		4	25	60	2,455	1	1 57020 60 0							
			4	25	70	2,540	1	1 57020 70 0							
			4	25	60	2,610	1	1 57020 61 0							
					4	25	70	2,550	1	1 57020 71 0					

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Dead-bolt and latch • SUPPLIED AS STANDARD: Striking plate item 1.06271.00.0 	 1 00100 00 1	4	85	25	60	1,475	1	1	57250	60	0
		 1 00102 00 1	4	85	25	60	1,500	1	1	57250	61	0
	<ul style="list-style-type: none"> • Dead-bolt and latch • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: Striking plate item 1.06272.00.0 Two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	4	85	25	60	1,700	1	1	57255	60	0
		 1 00102 00 1	4	85	25	60	1,750	1	1	57255	61	0
	<ul style="list-style-type: none"> • For metal profiles • Dead-bolt and latch • Pre-arranged for additional locking points • Without striking plate • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	4	85	25	60	1,380	1	1	57256	60	0

Technical features:

- Painted, brass plated satin steel faceplate and striking plate
- Zinc plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel multiple dead-bolts

Supplied as standard:

- Striking plate
- 2 escutcheons: inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed


Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.

	<ul style="list-style-type: none"> • 3 dead-bolts only • SUPPLIED AS STANDARD: Striking plate item 1.06283.00.0 	 1 00100 00 1	4	25	50	1,065	1	1	57028	50	0				

	<ul style="list-style-type: none"> • 4 dead-bolts only • SUPPLIED AS STANDARD: Striking plate item 1.06283.01.0 	 1 00100 00 1	4	25	60	1,150	1	1	57028	60	0				

	<ul style="list-style-type: none"> • 4 dead-bolts only • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: Two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 Striking plate item 1.06283.02.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00101 00 1	4	25	60	1,400	1	1	57033	60	0				

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim. Hand	Fin.	Pers. Spec.

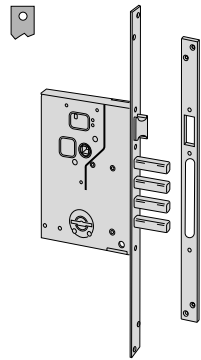

- Latch and 4 dead-bolts
- SUPPLIED AS STANDARD:
Striking plate item 1.06284.00.0




1 00101 00 1

4 85 25 60 1,410 1 1 57260 60 0



1 00102 00 1

4 85 25 60 1,425 1 1 57260 61 0



- Latch and 4 dead-bolts
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
Striking plate item 1.06284.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0



1 00101 00 1

4 85 25 60 1,700 1 1 57265 60 0



1 00102 00 1

4 85 25 60 1,715 1 1 57265 61 0

Technical features:

- Nickel-plated steel faceplate and striking plate
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel dead-bolt
- Adjustable roller from 2 to 13 mm

Supplied as standard:

- Striking plate
- 2 escutcheons: inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed


Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.

	<ul style="list-style-type: none"> • Dead-bolt and latch • SUPPLIED AS STANDARD: Striking plate item 1.06279.00.0 		2	85	22	40	0,950	1	1	57210	40	0
			2	85	22	45	0,900	1	1	57210	45	0
			2	85	22	50	1,000	1	1	57210	50	0
			2	85	22	60	1,070	1	1	57210	60	0

	<ul style="list-style-type: none"> • Dead-bolt and latch • SUPPLIED AS STANDARD: Striking plate item 1.06278.00.0 		2	85	22	40	0,935	1	1	57211	40	0	
			2	85	22	45	0,980	1	1	57211	45	0	
			2	85	22	50	1,020	1	1	57211	50	0	
			2	85	22	60	1,070	1	1	57211	60	0	
				2	85	22	40	0,890	1	1	57211	41	0
				2	85	22	45	0,890	1	1	57211	46	0
				2	85	22	50	1,030	1	1	57211	51	0
				2	85	22	60	1,075	1	1	57211	61	0

	<ul style="list-style-type: none"> • Dead-bolt and latch • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: Striking plate item 1.06272.00.0 Two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 		2	85	25	45	1,340	1	1	57215	45	0	
			2	85	25	50	1,360	1	1	57215	50	0	
			2	85	25	60	1,420	1	1	57215	60	0	
		<ul style="list-style-type: none"> • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 		2	85	25	45	1,340	1	1	57215	46	0
				2	85	25	50	1,365	1	1	57215	51	0
				2	85	25	60	1,430	1	1	57215	61	0


Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.



- Dead-bolt and roller latch
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Special striking plate
Two guides for extended bolts item 1.06085.00.0
Top striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0




2	85	25	45	1,280	1	1 57217 45 0
2	85	25	50	1,310	1	1 57217 50 0
2	85	25	60	1,260	1	1 57217 60 0




- Dead-bolt only
- SUPPLIED AS STANDARD:
Striking plate item 1.06282.00.0



2	22	40	40	0,690	1	1 57220 40 0
2	22	45	45	0,710	1	1 57220 45 0
2	22	50	50	0,730	1	1 57220 50 0
2	22	60	60	0,765	1	1 57220 60 0




2	22	40	40	0,700	1	1 57220 41 0
2	22	45	45	0,640	1	1 57220 46 0
2	22	50	50	0,740	1	1 57220 51 0
2	22	60	60	0,680	1	1 57220 61 0




- Dead-bolt only
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Striking plate item 1.06235.00.0
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0



2	25	45	45	0,945	1	1 57225 45 0
2	25	50	50	0,960	1	1 57225 50 0
2	25	60	60	1,000	1	1 57225 60 0




2	25	45	45	0,950	1	1 57225 46 0
2	25	50	50	0,960	1	1 57225 51 0
2	25	60	60	1,000	1	1 57225 61 0

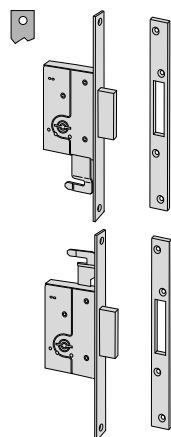

- Pair of locks dead-bolt only
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Two striking plates item 1.06235.00.0
Two guides for extended bolts item 1.06085.00.0
Top striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06416.00.0
Floor striker item 1.06086.00.0



2	25	45	45	1,670	1	1 57230 45 0
2	25	50	50	1,720	1	1 57230 50 0
2	25	60	60	1,790	1	1 57230 60 0



2	25	45	45	1,680	1	1 57230 46 0
2	25	50	50	1,735	1	1 57230 51 0
2	25	60	60	1,812	1	1 57230 61 0



Technical features:

- Painted, brass plated steel faceplate and striking plate
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel multiple dead-bolts

Hand:

0 = Non-handed

Supplied as standard:

- Striking plate
- Escutcheons item 1.06144.10.0
- 3 keys
- Fixing screws

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin. Pers. Spec.		
	<ul style="list-style-type: none"> • Latch and 3 dead-bolts • SUPPLIED AS STANDARD: Striking plate item 1.06279.12.0 	 1 00101 00 1	2	85	22 45	0,960	1	1	57290	45	0		
			2	85	22 50	1,030	1	1	57290	50	0		
			2	85	22 60	1,095	1	1	57290	60	0		
				 1 00102 00 1	2	85	22 45	0,960	1	1	57290	46	0
					2	85	22 50	1,030	1	1	57290	51	0
					2	85	22 60	1,085	1	1	57290	61	0
	<ul style="list-style-type: none"> • Latch and 3 dead-bolts • SUPPLIED AS STANDARD: Striking plate item 1.06278.11.0 	 1 00101 00 1	2	85	22 45	1,000	1	1	57291	45	0		
			2	85	22 50	1,030	1	1	57291	50	0		
			2	85	22 60	1,100	1	1	57291	60	0		
				 1 00102 00 1	2	85	22 45	0,960	1	1	57291	46	0
					2	85	22 50	1,035	1	1	57291	51	0
					2	85	22 60	0,960	1	1	57291	61	0
	<ul style="list-style-type: none"> • Latch and 3 dead-bolts • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: Two plates item 1.06085.00.0 Upper striker item 1.06084.00.0 Striking plate item 1.06284.00.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00101 00 1	2	85	25 45	1,340	1	1	57296	45	0		
			2	85	25 50	1,400	1	1	57296	50	0		
			2	85	25 60	1,435	1	1	57296	60	0		
				 1 00102 00 1	2	85	25 45	1,396	1	1	57296	46	0
					2	85	25 50	1,370	1	1	57296	51	0
					2	85	25 60	1,450	1	1	57296	61	0



Technical features:

- Steel case and striker, painted in a metallized, antique bronze colour
- Nickel-plated steel latch
- Nickel-plated steel multiple dead-bolts
- External draw-back pull
- Picking resistant protection device on the latch lever
- External key guide


Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards

Supplied as standard:

- Striker
- Outside escutcheon item 1.06140.00.0
- 3 keys:
 - item 1.00120.00.1 for hand 1
 - item 1.00120.00.2 for hand 2
- Fixing screws
- Instruction sheet

Type	Description	Key item	Throws	Backset	Unit weight 	Pieces	ITEM			
							Type	Dim.	Hand	Fin. Pars. Spec.




- 4 dead-bolts only

WHILE STOCK LASTS
Replaced by 57152 serie

	4	64	2,340	1	1	57110 60 1			
1 00120 00 1/2	4	64	2,330	1	1	57110 60 2			

	4	64	2,330	1	1	57150 60 1			
1 00125 00 1/2	4	64	2,330	1	1	57150 60 2			




- 4 dead-bolts only
- SUPPLIED AS STANDARD:
2 extended bolts item 1.06425.01.0
2 diverting devices item 1.06418.00.0

WHILE STOCK LASTS
Replaced by 57162 serie

	4	64	2,650	1	1	57120 60 1			
1 00120 00 1/2	4	64	2,650	1	1	57120 60 2			

	4	64	2,685	1	1	57160 60 1			
1 00125 00 1/2	4	64	2,685	1	1	57160 60 2			




- 4 dead-bolts only
- SUPPLIED AS STANDARD:
4 extended bolts with connecting rod item 1.06426.01.0
Subsidiary driving mechanism
2 diverting devices item 1.06418.00.0

WHILE STOCK LASTS
Replaced by 57172 serie

	4	64	3,450	1	1	57130 60 1			
1 00120 00 1/2	4	64	3,450	1	1	57130 60 2			

	4	64	3,500	1	1	57170 60 1			
1 00125 00 1/2	4	64	3,500	1	1	57170 60 2			










- Latch and 3 dead-bolts
- Draw-back pull

WHILE STOCK LASTS
Replaced by 57157 serie

	4	64	2,376	1	1	57115 60 1			
1 00120 00 1/2	4	64	2,379	1	1	57115 60 2			

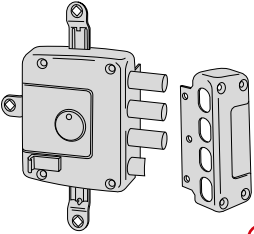	4	64	2,400	1	1	57155 60 1			
1 00125 00 1/2	4	64	2,300	1	1	57155 60 2			

Type	Description	Key item	Throws	Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> Latch and 3 dead-bolts Draw-back pull SUPPLIED AS STANDARD: 2 extended bolts item 1.06425.01.0 2 diverting devices item 1.06418.00.0 <p>WHILE STOCK LASTS Replaced by 57167 serie</p>	 1 00120 00 1/2	4	64	2,640	1	1 57125 60 1				
		4	64	2,640	1	1 57125 60 2				
 1 00125 00 1/2	4	64	2,670	1	1 57165 60 1					
	4	64	2,650	1	1 57165 60 2					
 <ul style="list-style-type: none"> Latch and 3 dead-bolts Draw-back pull SUPPLIED AS STANDARD: 4 extended bolts with connecting rod item 1.06426.01.0 Subsidiary driving mechanism 2 diverting devices item 1.06418.00.0 <p>WHILE STOCK LASTS Replaced by 57177 serie</p>	 1 00120 00 1/2	4	64	3,300	1	1 57135 60 1				
		4	64	3,300	1	1 57135 60 2				
 1 00125 00 1/2	4	64	3,465	1	1 57175 60 1					
	4	64	3,475	1	1 57175 60 2					
 <ul style="list-style-type: none"> Top and bottom locking 2 extended bolts item 1.06425.01.0 Inside coin activated piece <p>WHILE STOCK LASTS Replaced by 57192 serie</p>				0,735	1	1 57190 00 0				



Technical features:

- Zinc-plated steel case
- Reversible flat latch with double chamfer, nickel-plated
- Nickel-plated dead-bolt, either in a regular or multiple bolts configuration

Supplied as standard:

- Fixing screws for lock and striker
- Instruction sheet


Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	DEAD-BOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- Bronze plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of bronze plated strikers item 1.07174.00.0
Bronze plated striking plate item 1.06329.00.0
Bronze plated long lip item 1.06293.00.0

	3	2	85	22	45	3,000	6	1	53002 45 0				
	3	2	85	22	50	4,000	6	1	53002 50 0				
	3	2	85	22	60	4,000	6	1	53002 60 0				


- Yellow zinc plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of yellow zinc plated strikers item 1.07174.00.0.82
Yellow zinc plated striking plate item 1.06329.00.0.82
Brass long lip item 1.06293.01.0

	3	2	85	22	45	3,420	6	1	53002 45 0 82				
	3	2	85	22	50	3,420	6	1	53002 50 0 82				
	3	2	85	22	60	3,420	6	1	53002 60 0 82				

- High-resistance zinc-plated flat faceplate 22x3 mm, 1600 mm.
- 3 lateral deadbolts
- ON REQUEST:
High-resistance zinc-plated strike plate set item 1.07174.00.0.B7
High-resistance zinc-plated strike plate item 1.06329.00.0.B7

	3	2	85	22	45	3,420	6	1	53002 45 0 B7				
	3	2	85	22	50	3,420	6	1	53002 50 0 B7				
	3	2	85	22	60	3,420	6	1	53002 60 0 B7				

Type	Description	DEAD-BOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- Bronze plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of bronze plated strikers item 1.07175.00.0
Bronze plated striking plate item 1.06328.00.0
Bronze plated long lip item 1.06293.00.0


	3	2	85	22	45	4,000	6	1	53003 45 0
	3	2	85	22	50	4,000	6	1	53003 50 0
	3	2	85	22	60	4,000	6	1	53003 60 0

- Yellow zinc plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of yellow zinc plated strikers item 1.07175.00.0.82
Yellow zinc plated striking plate item 1.06328.00.0.82
Brass long lip item 1.06293.01.0

	3	2	85	22	45	3,000	6	1	53003 45 0 82
	3	2	85	22	50	3,420	6	1	53003 50 0 82
	3	2	85	22	60	3,420	6	1	53003 60 0 82

- High-resistance zinc-plated flat faceplate 22x3 mm, 1600 mm.
- Latch and 3 lateral deadbolts
- ON REQUEST:
High-resistance zinc-plated strike plate set item 1.07175.00.0.B7
High-resistance zinc-plated strike plate item 1.06328.00.0.B7


	3	2	85	22	45	3,000	6	1	53003 45 0 B7
	3	2	85	22	50	3,420	6	1	53003 50 0 B7
	3	2	85	22	60	3,420	6	1	53003 60 0 B7



- Lacquered satin brass adjustable 'flat' faceplate 22 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass strikers item 1.07176.10.0
Lacquered satin brass adjustable striking plate item 1.06330.00.0

	3	2	85	22	50	4,750	6	1	53035 50 0
	3	2	85	22	60	4,750	6	1	53035 60 0

Type	Description	DEAD-BOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim. Hand	Fin.	Pers. Spec.



- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and central dead-bolt
- Vertical extended bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0
(2 pcs required)




3	2	85	22	45	4,750	6	1	53131	45	0
3	2	85	22	50	4,750	6	1	53131	50	0
3	2	85	22	60	4,750	6	1	53131	60	0

- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and central dead-bolt
- Vertical extended bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.6292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0
(2 pcs required)



3	2	85	22	45	4,750	6	1	53151	45	0
3	2	85	22	50	4,750	6	1	53151	50	0
3	2	85	22	60	4,750	6	1	53151	60	0



- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 2 lateral dead-bolts
- Top vertical extended bolt
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07178.00.0
Set of long lipped lacquered satin brass strikers item 1.07178.10.0




3	2	85	22	45	3,900	6	1	53133	45	0
3	2	85	22	50	3,900	6	1	53133	50	0
3	2	85	22	60	3,900	6	1	53133	60	0

- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 2 lateral dead-bolts
- Top vertical extended bolt
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07179.00.0
Set of long lipped lacquered satin brass strikers item 1.07179.10.0



3	2	85	22	50	3,900	6	1	53153	50	0
3	2	85	22	60	3,900	6	1	53153	60	0

Type	Description	DEAD-BOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.




- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass strikers item 1.07176.10.0
Lacquered satin brass adjustable striker item 1.06330.00.0

	3	2	85	22	45	4,750	6	1	53135	45	0
	3	2	85	22	50	4,750	6	1	53135	50	0
	3	2	85	22	60	4,750	6	1	53135	60	0

- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm. 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral dead-bolts
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07177.00.0
Set of long lipped lacquered satin brass strikers item 1.07177.10.0
Lacquered satin brass adjustable striker item 1.06331.00.0

	3	2	85	22	45	4,750	6	1	53155	45	0
	3	2	85	22	50	4,750	6	1	53155	50	0
	3	2	85	22	60	4,750	6	1	53155	60	0



- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral dead-bolts
- Vertical extended bolts
- SUPPLIED AS STANDARD:
2 upper strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass strikers item 1.07176.10.0
Lacquered satin brass adjustable striker item 1.06330.00.0

	5	2	85	22	45	3,900	6	1	53137	45	0
	5	2	85	22	50	3,900	6	1	53137	50	0
	5	2	85	22	60	3,900	6	1	53137	60	0

- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral dead-bolts
- Vertical extended bolts
- SUPPLIED AS STANDARD:
2 upper strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07177.00.0
Set of long lipped lacquered satin brass strikers item 1.07177.10.0
Lacquered satin brass adjustable striker item 1.06331.00.0

	5	2	85	22	45	4,750	6	1	53157	45	0
	5	2	85	22	50	3,900	6	1	53157	50	0
	5	2	85	22	60	3,900	6	1	53157	60	0



Technical features:


- Zinc-plated steel case
- Reversible flat latch with double chamfer, nickel-plated
- Nickel-plated dead-bolt, either in a regular or multiple bolts configuration
- U shaped adjustable faceplate (22 x 10) in satin finish laquered brass, 2,600 mm. height
upper adjustment 650 mm.
lower adjustment 35 mm.

Hand:
0 = Non-handed

Supplied as standard:

- 3 keys
- Fixing screws for lock and striker
- Instruction sheet

Type	Description	DEAD-BOLTS	Key item	Lacking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
											Type	Dim.	Hand	Fin.



- Lacquered satin brass adjustable faceplate
- Latch-bolt and central dead-bolt
- Vertical extended bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
1 Inside escutcheon item 1.06143.00.0
1 Outside escutcheon item 1.06082.00.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs. required)



3	2	85	22	45	4,750	6	1 57831 45 0
3	2	85	22	50	4,750	6	1 57831 50 0
3	2	85	22	60	4,750	6	1 57831 60 0



3	2	85	22	45	4,750	6	1 57831 46 0
3	2	85	22	50	4,750	6	1 57831 51 0
3	2	85	22	60	4,750	6	1 57831 61 0



3	2	85	22	45	4,750	6	1 57851 45 0
3	2	85	22	50	4,750	6	1 57851 50 0
3	2	85	22	60	4,750	6	1 57851 60 0


- Lacquered satin brass adjustable faceplate
- Latch-bolt and central dead-bolt
- Vertical extended bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
Escutcheons item 1.06144.10.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs. required)



3	2	85	22	45	4,750	6	1 57851 46 0
3	2	85	22	45	4,750	6	1 57851 51 0
3	2	85	22	60	4,750	6	1 57851 61 0

Type	Description	DEAD-BOLTS	Key item	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM							
											Type	Dim.	Hand	Fin.	Pers.	Spec.		
	<ul style="list-style-type: none"> • Lacquered satin brass adjustable faceplate • Latch-bolt and 2 lateral dead-bolts • Top vertical extended bolt • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 1 Inside escutcheon item 1.06143.00.0 1 Outside escutcheon item 1.06082.00.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07178.00.0 Set of long lipped lacquered satin brass striker item 1.07178.10.0 		1 00100 00 1	3	2	85	22	45	4,750	6	1	57833	45	0				
				3	2	85	22	50	4,750	6	1	57833	50	0				
				3	2	85	22	60	4,750	6	1	57833	60	0				
			<ul style="list-style-type: none"> • Lacquered satin brass adjustable faceplate • Latch-bolt and 2 lateral dead-bolts • Top vertical extended bolt • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 Escutcheons item 1.06144.10.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07179.00.0 Set of long lipped lacquered satin brass striker item 1.07179.10.0 		1 00102 00 1	3	2	85	22	45	4,750	6	1	57833	46	0		
						3	2	85	22	50	4,750	6	1	57833	51	0		
						3	2	85	22	60	4,750	6	1	57833	61	0		
					<ul style="list-style-type: none"> • Lacquered satin brass adjustable faceplate • Latch-bolt and 2 lateral dead-bolts • Top vertical extended bolt • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 Escutcheons item 1.06144.10.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07179.00.0 Set of long lipped lacquered satin brass striker item 1.07179.10.0 		1 00101 00 1	3	2	85	22	45	4,750	6	1	57853	45	0
								3	2	85	22	50	4,750	6	1	57853	50	0
								3	2	85	22	60	4,750	6	1	57853	60	0
	<ul style="list-style-type: none"> • Lacquered satin brass adjustable faceplate • Latch-bolt and 2 lateral dead-bolts • Top vertical extended bolt • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 Escutcheons item 1.06144.10.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07179.00.0 Set of long lipped lacquered satin brass striker item 1.07179.10.0 						1 00102 00 1	3	2	85	22	45	4,750	6	1	57853	46	0
								3	2	85	22	50	4,750	6	1	57853	51	0
								3	2	85	22	60	4,750	6	1	57853	61	0

Type	Description	DEAD-BOLTS	Key item	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
											Type	Dim.	Hand	Fin.



- Lacquered satin brass adjustable faceplate
- Latch-bolt and 3 lateral dead-bolts
- SUPPLIED AS STANDARD:
Inside escutcheon item 1.06143.00.0
Outside escutcheon item 1.06082.00.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass striker item 1.07176.10.0
Lacquered satin brass adjustable striking plate item 1.06330.00.0



1 00100 00 1

3	2	85	22	45	4,750	6	1	57835 45 0
3	2	85	22	50	4,750	6	1	57835 50 0
3	2	85	22	60	4,750	6	1	57835 60 0



1 00102 00 1

3	2	85	22	45	4,750	6	1	57835 46 0
3	2	85	22	50	4,750	6	1	57835 51 0
3	2	85	22	60	4,750	6	1	57835 61 0



1 00101 00 1

3	2	85	22	45	4,750	6	1	57855 45 0
3	2	85	22	50	4,750	6	1	57855 50 0
3	2	85	22	60	4,750	6	1	57855 60 0

- Lacquered satin brass adjustable faceplate
- Latch-bolt and 3 lateral dead-bolts
- SUPPLIED AS STANDARD:
Escutcheons item 1.06144.10.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07177.00.0
Set of long lipped lacquered satin brass striker item 1.07177.10.0
Lacquered satin brass adjustable striking plate item 1.06331.00.0



1 00102 00 1


3	2	85	22	45	4,750	6	1	57855 46 0
3	2	85	22	50	4,750	6	1	57855 51 0
3	2	85	22	60	4,750	6	1	57855 61 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Angular non-handed brass striker 	12010, 12011	0,110	6	1	06035	00	0
	<ul style="list-style-type: none"> • Brass push-button • ON REQUEST: Nichel plated brass (fin. 12) 	12010, 12011, 12015, 12016	0,037	6	1	06110	00	0
	<ul style="list-style-type: none"> • Angular non-handed brass striker 	12015, 12016	0,163	6	1	06218	00	0
	<ul style="list-style-type: none"> • Nylon contact set complete with spacers: 2 mm. (Pcs. 4) 	11000, 12000, 13000	0,035	6	1	06510	00	0
	<ul style="list-style-type: none"> • Coil set • 12 V ac 	12010, 12011, 12015, 12016	0,051	6	1	07009	00	0
	<ul style="list-style-type: none"> • Coil set • 12 V ac 	13010	0,071	6	1	07012	00	0
	<ul style="list-style-type: none"> • Gray lacquered steel striker with roller 	11610, 11611, 11630, 11631, 11635	0,178 0,178	6 6	1 1	07017	10	1 2

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Striker 	1A610, 1A611, 1A630, 1A631	0,200 6	1	07021	10	0
	<ul style="list-style-type: none"> • 1 mm spacer for striker 	1A610, 1A611, 1A630, 1A631	0,025 6	1	07021	11	0
	<ul style="list-style-type: none"> • Striker set including: slide anchoring plate screws 	11610, 11921, 11931	0,100 0,100	1 1	07018	10	3 4
	<ul style="list-style-type: none"> • Gray lacquered steel striker with roller 	11660, 11661, 11670, 11671	0,210 0,210	6 6	07019	10	1 2
	<ul style="list-style-type: none"> • Coil set • 12 V ac • Black nylon support 	11521, 11540, 11551, 11560, 11610, 11611, 11630, 11631, 11660, 11661, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,087 0,087	6 6	07118	00	1 2
	<ul style="list-style-type: none"> • Coil set • 24 V ac • Black nylon support 	11540, 11560, 11610, 11611, 11630, 11631, 11660, 11661, 11670, 11671	0,075 0,082	6 6	07118	01	1 2


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Adjustable coil set 12 V ac Blue nylon support 	11521, 11540,	0,075	6	1	07120	00	1
		11551, 11560, 11610, 11611, 11630, 11631, 11660, 11661, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,074	6	1	07120	00	2
	<ul style="list-style-type: none"> Adjustable coil set 24 V ac Blue nylon support 	11540, 11560,	0,075	6	1	07120	01	1
		11610, 11611, 11630, 11631, 11660, 11661, 11670, 11671	0,075	6	1	07120	01	2
	<ul style="list-style-type: none"> Coil set 12V ac CE 	1A610, 1A611, 1A630, 1A631, 1A721, 1A731	0,092	6	1	07025	00	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim. Hand	Fin.	Pers. Spec.



• Metalized aluminium spacer set

54570, 57580 0,180 6 1 06091 10 0



• Amaranth red lacquered steel striker

50110, 50111, 0,104 6 1 07024 00 1
 50115, 50120, 0,090 6 1 07024 00 2
 50121, 50150,
 50151, 50160,
 50170, 50171,
 50180, 50181

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Long lipped, brass plated steel striker with round corners	52131, 52631, 52671	0,049	25	1	06098	00	0	
	• Brass plated steel striker with round corners	52641 5C631 5C671	0,087	25	1	06100	10	0	
	• Brass plated striker with round corners	5C140	0,096	25	1	06100	15	0	
	• Long lipped, brass plated steel striker with round corners	52641 5C631 5C671	0,056	25	1	06101	10	0	
	• Long lipped, brass plated steel striker	52611 5C621 5C651	0,058	25	1	06102	10	0	
	• Long lipped, brass striker	5C110	0,057	25	1	06102	13	0	
	• Brass plated steel striker with round corners	5C631, 5C641, 5C671	0,050	25	1	06105	10	0	
	• Long lipped, brass striker	52300	0,040	25	1	06107	00	0	
	• Long lipped, brass striker	5C120	0,055	25	1	06149	00	0	
	• Long lipped, brass plated steel striker with round corners	56031	0,050	25	1	06151	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	• Long lipped, brass plated steel striker	5C011	0,052	25	1	06152	00	0
	• Long lipped, brass plated steel striker	5C021	0,550	25	1	06162	00	0
	• Long lipped brass striker	5C010	0,055	25	1	06163	00	0
	• Brass plated steel striker	5C611, 5C621, 5C651, 52621	0,074	25	1	06206	00	0
	• Brass striker	5C110	0,062	25	1	06216	00	0
	• Long lipped brass plated steel striker	52111, 52611, 52651	0,050	25	1	06223	00	0
	• Brass plated steel striker	52111, 52611, 52651	0,053	25	1	06226	00	0
	• Brass plated steel striker with round corners	52131, 52631, 52671, 5C031	0,098	25	1	06243	00	0
	• Brass striker	52210, 52310	0,025	25	1	07032	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Protective rose for cylinder series RS3, ASTRAL (with long key CL) and ASIX, in polished golden finish carbonitrited steel Complete with: Spacers 2 mm. (pcs.19), 1 mm. (pcs. 2) Outside cover plates 2 mm. (pcs.2) Screws M5 x 73 mm. Inner rose 	12000, 52000, 53000	0,500	1	1	06460	15	0	
	<ul style="list-style-type: none"> Carbonitrited steel protection rose with polished brass finish 2 screws (M6) AVAILABLE FINISHES: Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) Polished chrome (fin. 18) 	0A310, 0B310, 08310, 08710	70,0	0,310	1	1	06460	50	0
	<ul style="list-style-type: none"> Carbonitrited steel rotor protection for roses series 06460 and 06461 	0A310, 0B310, 08310, 08510, 08710		0,009	50	1	06466	01	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Indicator of occupancy 	52842, 52844, 52862, 52864	0,015 6	1	06146	00	0
	<ul style="list-style-type: none"> Split follower 	52760, 52761, 52844, 52864	0,047 25	1	07206	01	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Inside brass escutcheon 	57000	0,035	12	1	06081	00	0
	<ul style="list-style-type: none"> • Outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	1	06082	00	0
	<ul style="list-style-type: none"> • Hollow outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,031	12	1	06083	00	0
	<ul style="list-style-type: none"> • Top steel striker 	52526, 56255, 57015, 57020, 57024, 57033, 57215, 57217, 57255, 57296	0,028	12	1	06084	00	0
	<ul style="list-style-type: none"> • Steel guide for extended bolts, with nylon insert 	52526, 56255, 57015, 57020, 57024, 57033, 57215, 57217, 57255, 57296	0,029	12	1	06085	00	0
	<ul style="list-style-type: none"> • Brass floor striker diameter 11 mm. • FOR: extended bolts with rods diameter 10 mm. 	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57020, 57033, 57215, 57217, 57255, 57265, 57296, 57831, 57851	0,016	12	1	06086	00	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extended bolts with 8 and 10 mm. diameter rods multi-point locks series 46445 Extended bolt for Multitop item 1.06449.11.0 		0,020	12	1	06086	02	0
	<ul style="list-style-type: none"> • Nylon key guide, with eight spacers 	57000	0,050	12	1	06142	00	0
	<ul style="list-style-type: none"> • Inside brass escutcheon with plug 	57000	0,032	12	1	06143	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	57010	0,117	25	1	06231	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	57015, 57020, 57220, 57225, 57230	0,124	25	1	06235	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	56250, 56255, 57210, 57211, 57215, 57250, 57255	0,116 0,120	25	1	06270	00	1 2
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	56250, 57250	0,126	25	1	06271	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	56255, 57215, 57255	0,131	25	1	06272	00	0
	<ul style="list-style-type: none"> • Long lipped nickel-plated steel striker 	56255, 57255	0,146	25	1	06275	00	0

TO BE DISCONTINUED

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	• Long lipped nickel-plated steel striker	56250, 57250	0,140	25	1	06276	00	0
	• Nickel-plated steel striker	57211	0,100	25	1	06278	00	0
	• Lacquered brass plated satin steel striker	52521, 57291	0,120	25	1	06278	11	0
	• Nickel plated steel striker with round corners	57210	0,096	25	1	06279	00	0
	• Lacquered brass plated satin steel striker with round corners	52520, 57290	0,120	25	1	06279	12	0
	• Long lipped nickel-plated steel striker	57211, 57215	0,145	25	1	06281	00	0
	• Nickel-plated steel striker	57220	0,079	25	1	06282	00	0
	• Lacquered brass plated steel striker	1 57028 60 0	0,100	12	1	06283	01	0
	• Lacquered brass plated steel striker	1 57033 60 0	0,100	12	1	06283	02	0
	• Lacquered brass plated steel striker	52526, 57260, 57265, 57296	0,131	25	1	06284	00	0

TO BE DISCONTINUED


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Long lipped lacquered brass plated steel striker 	57260, 57265	0,140	25	1	06284	01	0
	<ul style="list-style-type: none"> • Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0	0,056	12	1	06291	00	0
	<ul style="list-style-type: none"> • Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0	0,054	12	1	06291	05	0
	<ul style="list-style-type: none"> • Zinc plated steel pin connector 	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0	0,016	12	1	06291	20	0
	<ul style="list-style-type: none"> • Zinc plated extended bolts • SUPPLIED AS STANDARD: • Pair of bolts dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces) 	52526, 56016, 56255, 57015, 57016, 57019, 57033, 57035, 57055, 57215, 57217, 57225, 57226, 57255, 57256, 57259, 57265, 57296, 57318, 57336	0,533	12	1	06415	00	0
	<ul style="list-style-type: none"> • Zinc plated extended bolt • SUPPLIED AS STANDARD: • Bolt dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces) 	57020, 57024, 57230	0,350	10	1	06416	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Outside brass escutcheon 	57110, 57115, 57120, 57125, 57130, 57135, 57150, 57155, 57160, 57165, 57170, 57175	0,029	12	1	06140	00	0	
	<ul style="list-style-type: none"> • Hollow outside brass escutcheon • A = 10, door thickness 60 mm. 	57110, 57115, 57120, 57125, 57130, 57135, 57150, 57155, 57160, 57165, 57170, 57175	0,032	12	1	06140	01	0	
	<ul style="list-style-type: none"> • Hollow outside brass escutcheon • A = 22, door thickness 70 mm. 	57110, 57115, 57120, 57125, 57130, 57135, 57150, 57155, 57160, 57165, 57170, 57175	0,037	12	1	06140	02	0	
	<ul style="list-style-type: none"> • Bronze lacquered steel top striker 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175, 57190	0,100	12	1	06236	00	0	
	<ul style="list-style-type: none"> • Brass floor striker with sprung dust cover 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175, 57190	0,028	12	1	06237	01	0	
	<ul style="list-style-type: none"> • Bronze lacquered steel adjustable extended bolt 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175, 57190	0,734	6	1	06417	00	0	
	<ul style="list-style-type: none"> • Set of bronze lacquered steel diverting devices 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175	0,050	12	1	06418	00	0	

TO BE DISCONTINUED

Type	Description	For series/item	Kg Unit weight	Pieces	ITEM	Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Bronze lacquered steel adjustable connecting rod 	57130, 57135, 57170, 57175	0,412	4	1 06419 00 0						
<p>TO BE DISCONTINUED</p>											
	<ul style="list-style-type: none"> • Bronze lacquered steel bar guide 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175, 57190	0,030	24	1 06422 00 0						
	<ul style="list-style-type: none"> • Bronze lacquered steel cranked adjustable extended bolt 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175	0,770	1	1 06423 00 0						
	<ul style="list-style-type: none"> • Bronze lacquered steel long adjustable extended bolt 	57120, 57125, 57130, 57135, 57160, 57165, 57170, 57175, 57190	0,766	6	1 06424 00 0						
	<ul style="list-style-type: none"> • Set of extended bolts including one item 06417 and one item 06424 	57120, 57125, 57160, 57165, 57190	1,500	1	1 06425 00 0						
<p>TO BE DISCONTINUED</p>											
	<ul style="list-style-type: none"> • Set of extended bolts including two items 06417 	57120, 57125, 57160, 57165, 57190	1,375	1	1 06425 01 0						
<p>WHILE STOCK LASTS Replaced by 106425 07 0</p>											

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.

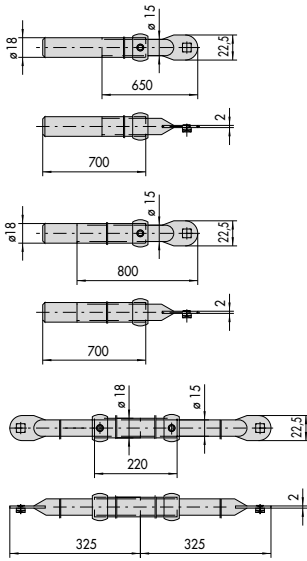


• Set of extended bolts including two items 06417, one item 06424 and one item 06419

57130, 57135, 57170, 57175 3,200 1

1 06426 00 0

TO BE DISCONTINUED

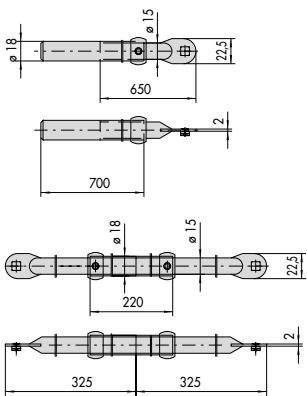


• Set of extended bolts including four items 06417 and one item 06419

57130, 57135, 57170, 57175 3,158 1

1 06426 01 0


WHILE STOCK LASTS
Replaced by 106426 07 0



• Bronze lacquered steel striker

57110, 57115, 57120, 57125, 57130, 57135, 57150, 57155, 57160, 57165, 57170, 57175 0,320 2

1 07054 00 0



• Bronze lacquered steel top striker

57110, 57115, 57120, 57125, 57130, 57135, 57150, 57155, 57160, 57165, 57170, 57175 0,442 2

1 07055 00 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nickel-plated steel screw 	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	1	06048	02	0
	<ul style="list-style-type: none"> Nickel-plated steel screw 	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	1	06048	03	0
	<ul style="list-style-type: none"> Inside brass escutcheon 	57000	0,035	12	1	06081	00	0
	<ul style="list-style-type: none"> Outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	1	06082	00	0
	<ul style="list-style-type: none"> Hollow outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,031	12	1	06083	00	0
	<ul style="list-style-type: none"> Polished brass key guide escutcheon with ten spacers AVAILABLE FINISHES: Bronze anodized aluminium (fin. 47) Chrome-plated brass (fin.18) 	57000	0,094	5	1	06119	00	0
	<ul style="list-style-type: none"> Inside brass escutcheon with plug 	57000	0,032	12	1	06143	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Polished brass rose with key guide For double bitted locks AVAILABLE FINISHES: Polished chrome (fin.18) Anodized light bronze(fin.64) Anodized dark bronze (fin.65) 		0,105	6	1	06144	10	1	
	<ul style="list-style-type: none"> Nylon key guide, including 2 supports for escutcheon and 3 spacers For double bit key locks 		0,066	6	1	06144	15	0	
	<ul style="list-style-type: none"> Polished brass cover for escutcheon and key guide AVAILABLE FINISHES: Polished chrome (fin.18) Anodized light bronze (fin.64) Anodized dark bronze (fin.65) 	1 06144 10 1, 1 06144 15 0	0,030	50	1	06144	50	1	
	<ul style="list-style-type: none"> Brass long lipped striker 	5C130, 5C170, 53131, 53151, 57831, 57851	0,055	25	1	06213	05	0	
	<ul style="list-style-type: none"> Bronze plated steel central striker 	53002	0,100	12	1	06278	10	0	
	<ul style="list-style-type: none"> Bronze plated steel central striker 	53002	0,100	12	1	06279	10	0	
	<ul style="list-style-type: none"> Yellow zinc plated steel central striker 	53002	0,091	12	1	06279	10	0 82	
	<ul style="list-style-type: none"> Lacquered satin brass central striker 	5C130, 5C170, 53035, 53131, 53133, 53135, 53137, 53151, 53153, 53155, 53157, 57831, 57833, 57835, 57851, 57853, 57855	0,096	12	1	06279	11	0	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Brass upper striker (single-leaf doors) 	53131, 53133, 53137, 53151, 53153, 53157, 57831, 57833, 57851, 57853	0,060	25	1	06292	00	0	
	<ul style="list-style-type: none"> • Brass upper striker (double-leaf doors) 	53131, 53133, 53137, 53151, 53153, 53157, 57831, 57833, 57851, 57853	0,060	25	1	06292	01	0	
	<ul style="list-style-type: none"> • Long lip in bronze plated brass for central strikers • Long lip in lacquered satin brass for central strikers 	53002, 53003	0,040	25	1	06293	00	0	
	<ul style="list-style-type: none"> • Top and bottom striker in bronze plated steel, for lateral dead-bolts 	53003	0,100	25	1	06322	00	0	
	<ul style="list-style-type: none"> • Top and bottom striker in bronze plated steel, for lateral dead-bolts 	53002	0,100	25	1	06323	00	0	
	<ul style="list-style-type: none"> • Top and bottom striker in yellow zinc plated steel, for lateral dead-bolts 	53002	0,087	25	1	06323	00	0 82	
	<ul style="list-style-type: none"> • Top and bottom striker in lacquered satin brass, for lateral dead-bolts 	53035, 53133, 53135, 53137, 57833, 57835	0,100	12	1	06323	01	0	
	<ul style="list-style-type: none"> • Top and bottom striker in lacquered satin brass, for lateral dead-bolts 	53153, 53155, 53157, 57853, 57855	0,120	12	1	06325	00	0	
	<ul style="list-style-type: none"> • Square striking plate (1.600 mm.) in bronze plated steel 	53003	0,800	6	1	06328	00	0	
	<ul style="list-style-type: none"> • Square striking plate (1.600 mm.) in yellow zinc plated steel 	53003	0,800	6	1	06328	00	0 82	
	<ul style="list-style-type: none"> • Square strike plate (1600 mm.) in high resistance zinc-plated steel 	53003	0,800	6	1	06328	00	0 B7	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Round striking plate (1.600 mm.) in bronze plated steel 	53002	0,800	6	1	06329	00	0	
	<ul style="list-style-type: none"> Round striking plate (1.600 mm.) in yellow zinc plated steel 	53002	0,800	6	1	06329	00	0 82	
	<ul style="list-style-type: none"> Square strike plate (1600 mm.) in high resistance zinc-plated steel 	53002	0,800	6	1	06329	00	0 B7	
	<ul style="list-style-type: none"> Adjustable striker in lacquered satin brass 	53035, 53135, 53137, 57835, 57837	1,300	6	1	06330	00	0	
	<ul style="list-style-type: none"> Adjustable striker in lacquered satin brass 	53155, 53157, 57855, 57857	1,300	6	1	06331	00	0	
	<ul style="list-style-type: none"> Protective rose for cylinder series RS3, ASTRAL (with long key CL) and ASIX, in polished golden finish carbonitrided steel Complete with: Spacers 2 mm. (pcs.16), 1 mm. (pcs. 2) Outside cover plates 2 mm. (pcs.2) Screws M5 x 73 mm. Inner rose 	12000, 52000, 53000	0,500	1	1	06460	15	0	
	<ul style="list-style-type: none"> Set of vertical extended bolts including 2 upper strikers (flat, square) and 2 floor striker 	53000, 57000	0,533	1	1	07173	00	0	
	<ul style="list-style-type: none"> Set of bronze plated steel striking plates: pcs. 1 item 1.06279.10.0 pcs 2 item 1.06323.00.0 	53002	0,266	6	1	07174	00	0	
	<ul style="list-style-type: none"> Set of yellow zinc plated steel striking plates: pcs. 1 item 1.06279.10.0.82 pcs. 2 item 1.06323.00.0.82 	53002	0,180	6	1	07174	00	0 82	
	<ul style="list-style-type: none"> High resistance zinc-plated steel strike plate set: 1 pc item 1.06279.10.0.B7 2 pcs item 1.06323.00.0.B7 	53002	0,180	6	1	07174	00	0 B7	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of bronze plated steel striking plates: pcs. 1 item 1.06278.10.0 pcs. 2 item 1.06323.00.0 	53003	0,300	6	1	07175	00	0
	<ul style="list-style-type: none"> • Set of yellow zinc plated steel striking plates: pcs. 1 item 1.06278.10.0.82 pcs. 2 item 1.06323.00.0.82 	53003	0,300	6	1	07175	00	0.82
	<ul style="list-style-type: none"> • High resistance zinc-plated steel strike plate set: pz. 1 art. 1.06278.10.0.B7 pz. 2 art. 1.06323.00.0.B7 	53003	0,300	6	1	07175	00	0.B7
	<ul style="list-style-type: none"> • Set of lacquered satin brass striking plates: pcs. 1 item 1.06279.11.0 pcs. 2 item 1.06323.01.0 	53035, 53135, 53137, 57835	0,300	6	1	07176	00	0
	<ul style="list-style-type: none"> • Set of lacquered satin brass striking plates: pcs. 2 item 1.06213.05.0 pcs. 2 item 1.06323.01.0 	53035, 53135, 53137, 57835	0,300	6	1	07176	10	0
	<ul style="list-style-type: none"> • Set of lacquered satin brass striking plates: pcs. 1 item 1.06279.11.0 pcs. 2 item 1.06325.00.0 	53155, 53157, 57855	0,275	6	1	07177	00	0
	<ul style="list-style-type: none"> • Set of lacquered satin brass striking plates: pcs. 2 item 1.06213.05.0 pcs. 2 item 1.06325.00.0 	53155, 53157, 57855	0,300	6	1	07177	10	0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Set of lacquered satin brass striking plates: pcs. 1 item 1.06279.11.0 pcs. 1 item 1.06323.01.0 	53133, 57833	0,192	6	1	07178	00	0	
	<ul style="list-style-type: none"> Set of lacquered satin brass striking plates: pcs. 2 item 1.06213.05.0 pcs. 1 item 1.06323.01.0 	53133, 57833	0,200	6	1	07178	10	0	
	<ul style="list-style-type: none"> Set of lacquered satin brass striking plates: pcs. 1 item 1.06279.11.0 pcs. 1 item 1.06325.00.0 	53153, 57853	0,300	6	1	07179	00	0	
	<ul style="list-style-type: none"> Set of lacquered satin brass striking plates: pcs. 2 item 1.06213.05.0 pcs. 1 item 1.06325.00.0 	53153, 57853	0,300	6	1	07179	10	0	
	<ul style="list-style-type: none"> Central cylinder lock with latch-bolt and flat-type dead-bolt 	53002, 53003, 53035, 53131, 53133, 53135, 53137, 57831, 57833, 57835	0,770 0,800 0,860	1 1 1	1	52507	45 50 60	0 0 0	
	<ul style="list-style-type: none"> Central cylinder lock with roller latch and flat-type dead-bolt 	53002, 53003, 53035, 53131, 53133, 53135, 53137, 57831, 57833, 57835	1,145 0,770 1,145	1 1 1	1	52508	45 50 60	0 0 0	

Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Central cylinder lock with latch-bolt and pin-operated dead-bolt 	53151, 53153,	0,735	1	1	52527	45	0
		53155, 53157,	0,765	1	1	52527	50	0
		57851, 57853,	0,800	1	1	52527	60	0
		57855						
	<ul style="list-style-type: none"> Central cylinder lock with roller latch and pin-operated dead-bolt 	53151, 53153,	0,700	1	1	52528	45	0
		53155, 53157,	0,700	1	1	52528	50	0
		57851, 57853,	0,805	1	1	52528	60	0
		57855						
	<ul style="list-style-type: none"> Double bit key central lock with latch-bolt and flat-type dead-bolt 3 key blanks item 1.00100.00.1 	53002, 53003,	0,845	1	1	57218	45	0
		53035, 53131,	0,870	1	1	57218	50	0
		53133, 53135,	0,925	1	1	57218	60	0
		53137, 57831,						
	57833, 57835							
	<ul style="list-style-type: none"> Double bit key central lock with latch-bolt and flat-type dead-bolt 3 key blanks item 1.00102.00.1 	53002, 53003,	0,850	1	1	57218	46	0
		53035, 53131,	0,880	1	1	57218	51	0
		53133, 53135,	0,940	1	1	57218	61	0
53137, 57831,								
57833, 57835								
	<ul style="list-style-type: none"> Double bit key central lock with roller latch and flat-type dead-bolt 3 key blanks item 1.00100.00.1 	53002, 53003,	1,340	1	1	57219	45	0
		53035, 53131,	1,340	1	1	57219	50	0
		53133, 53135,						
		53137, 57831,						
57833, 57835								
	<ul style="list-style-type: none"> Double bit key central lock with latch-bolt and pin-operated dead-bolt 3 key blanks item 1.00100.00.1 	53151, 53153,	1,340	1	1	57298	45	0
		53155, 53157,	0,845	1	1	57298	50	0
		57851, 57853,	0,910	1	1	57298	60	0
		57855						
	<ul style="list-style-type: none"> Double bit key central lock with latch-bolt and pin-operated dead-bolt 3 key blanks item 1.00102.00.1 	53151, 53155,	1,340	1	1	57298	46	0
		53157, 57851,	1,340	1	1	57298	51	0
		57853, 57855	1,340	1	1	57298	61	0

Type	Description	For series/item	Unit weight		ITEM				
			Kg	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Double bit key central lock with roller latch and pin-operated dead-bolt • 3 key blanks item 1.00100.00.1 	53151, 53153,	0,950	1	1	57299	45	0	
		53155, 53157,	0,815	1	1	57299	50	0	
		57851, 57853, 57855	0,875	1	1	57299	60	0	

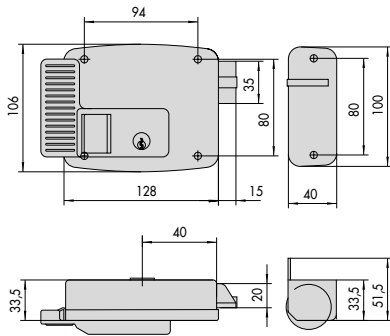


1.11540.40, 1.11560.40

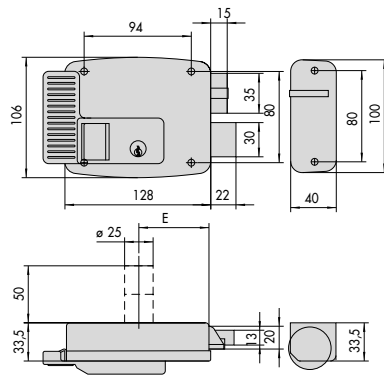

11660, 11661, 11670, 11761, 11671, 11771

E = 50 - 60 - 70 - 80

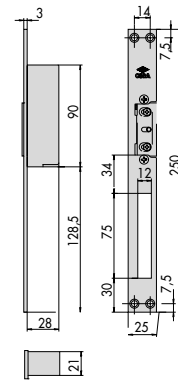


1.15001.00

1


4

7

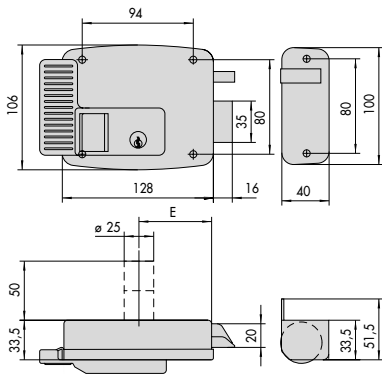


11610, 11611, 11630, 11635

E = 50 - 60 - 70 - 80

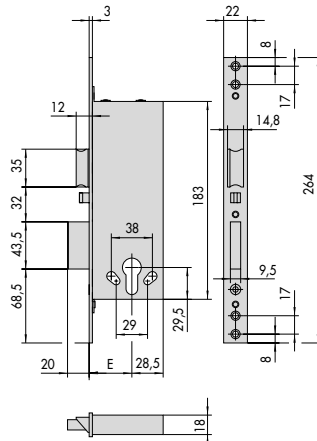

12010, 12011, 12015, 12016

E = 40 - 50 - 60 - 70




1.15005.00

2


5

8

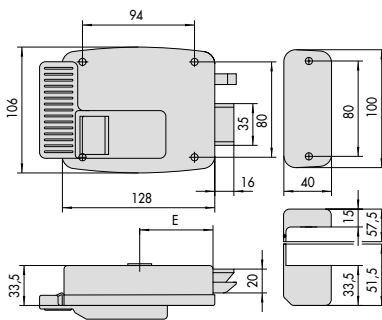


11610 - 11630

E = 50 - 60 - 70 - 80

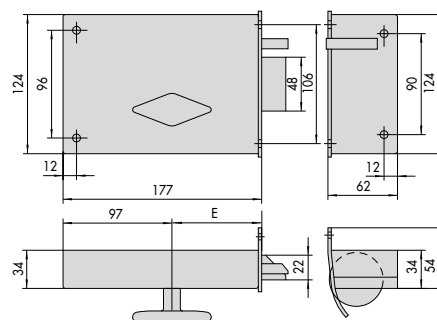

13010

E = 60 - 70 - 80 - 90 - 100 - 110 - 120




15100, 15101, 15102, 15110, 15120, 15121, 15122, 15130, 15140, 15150, 15160, 15170, 15180


3

6


9

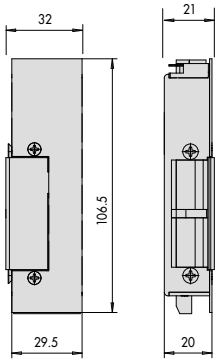

15200

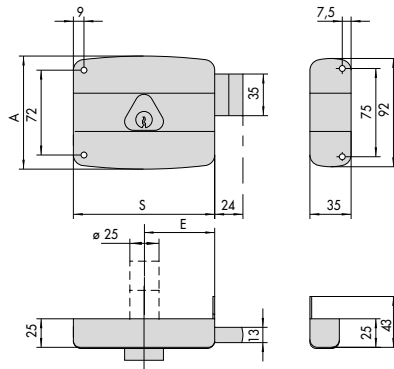


	E	S	A		E	S	A
1.50130.40	40	80	94	1.50141.40	40	80	94
1.50130.50	50	100	95	1.50141.50	50	100	95
1.50130.60	60	120	96	1.50141.60	60	120	96
1.50130.70	70	140	97	1.50141.70	70	140	97
1.50131.40	40	80	94				
1.50131.50	50	100	95				
1.50131.60	60	120	96				
1.50131.70	70	140	97				




1.50210.45, 1.50211.45

10

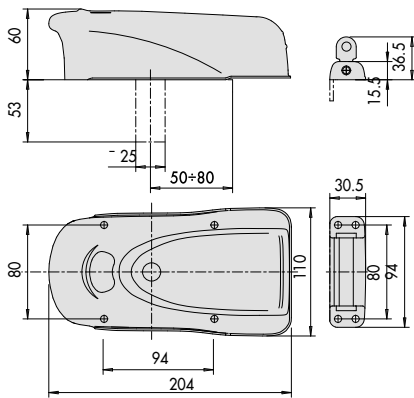


1A610, 1A611, 1A630, 1A631, 1A721, 1A731

13

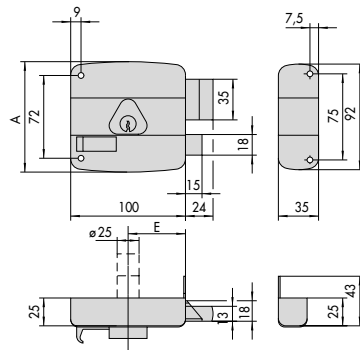


	E	S	A
1.50160.40	40	80	94
1.50160.50	50	100	95
1.50160.60	60	120	96
1.50160.70	70	140	97

16



1.50220.45, 1.50221.45


11

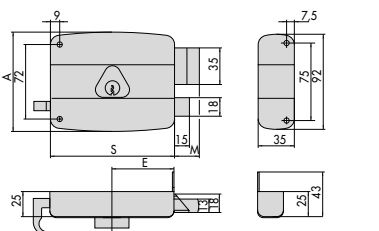

	E	S	A	M		E	S	A	M
1.50110.40	40	80	94	24	1.50126.50	50	100	95	33
1.50110.50	50	100	95	24	1.50126.60	60	120	96	33
1.50110.60	60	120	96	24	1.50126.70	70	140	97	33
1.50110.70	70	140	97	24	1.50161.40	40	80	94	24
1.50111.40	40	80	94	24	1.50161.50	50	100	95	24
1.50111.50	50	100	95	24	1.50161.60	60	120	96	24
1.50111.60	60	120	96	24	1.50161.70	70	140	97	24
1.50111.70	70	140	97	24	1.50320.40	40	80	94	24
1.50115.50	50	100	95	33	1.50320.50	50	100	95	24
1.50115.60	60	120	96	33	1.50320.60	60	120	96	24
1.50115.70	70	140	97	33	1.50320.70	70	140	97	24
1.50120.40	40	80	94	24	1.50321.40	40	80	94	24
1.50120.50	50	100	95	24	1.50321.50	50	100	95	24
1.50120.60	60	120	96	24	1.50321.60	60	120	96	24
1.50120.70	70	140	97	24	1.50321.70	70	140	97	24
1.50121.40	40	80	94	24	1.50330.40	40	80	94	24
1.50121.50	50	100	95	24	1.50330.50	50	100	95	24
1.50121.60	60	120	96	24	1.50330.60	60	120	96	24
1.50121.70	70	140	97	24	1.50330.70	70	140	97	24
1.50125.50	50	100	95	33	1.50340.40	40	80	94	24
1.50125.60	60	120	96	33	1.50340.50	50	100	95	24
1.50125.70	70	140	97	33	1.50340.60	60	120	96	24
					1.50340.70	70	140	97	24


12

14

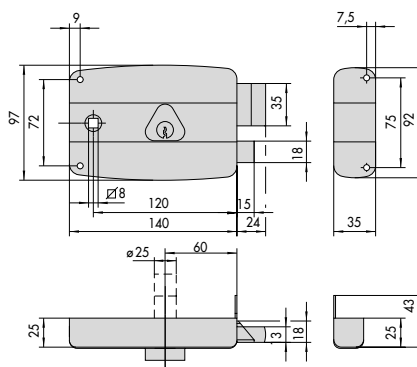

1.50170.60, 1.50171.60, 1.50180.60, 1.50181.60,


17

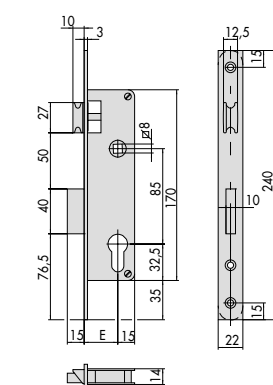


5C010, 5C011, 5C031
E = 21 - 25 - 30

15


18

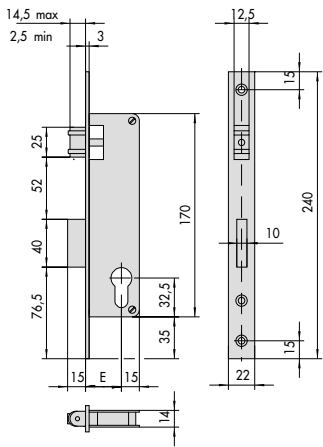

5C021
E = 21 - 25 - 30

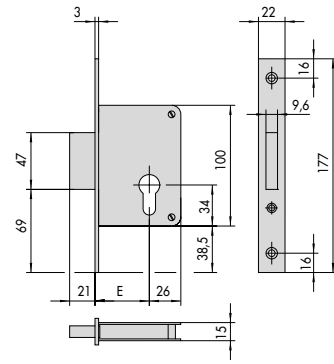

52310
E = 40 - 45 - 50 - 60 - 70

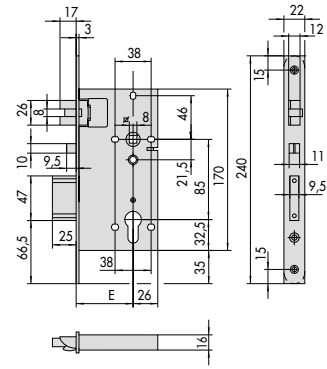


52710, 52711, 52730, 52731, 52840, 52842, 52844, 52860, 52862, 52864


19

22


25

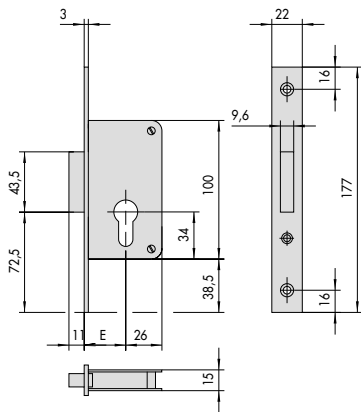

52210
E = 30

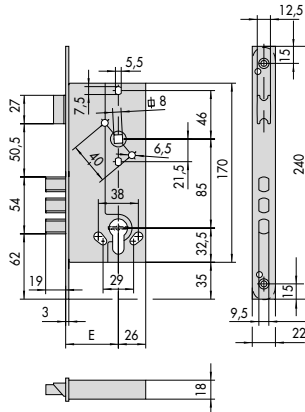

52521
52520
57291
57290
 E = 45 - 50 - 60

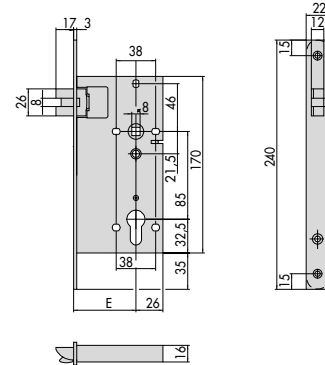


52750, 52751


20

23


26

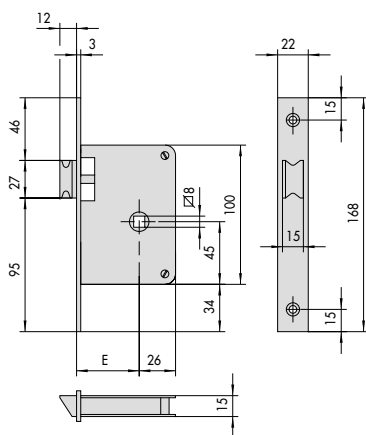

52300
E = 60

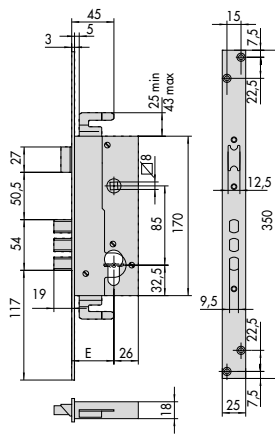

52526
57296
 E = 45 - 50 - 60

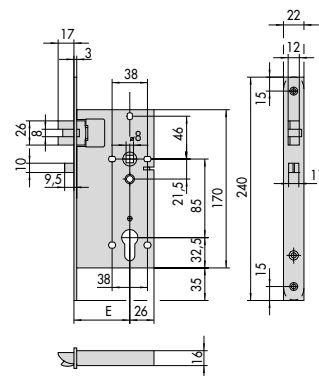


52755, 52756, 52760, 52761

21


24

27

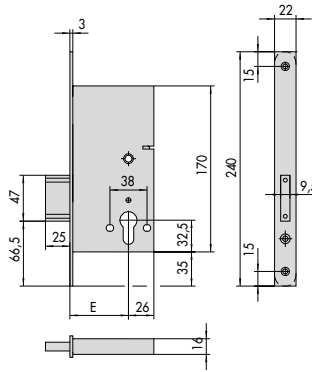


52780, 52781, 52871, 52891

28

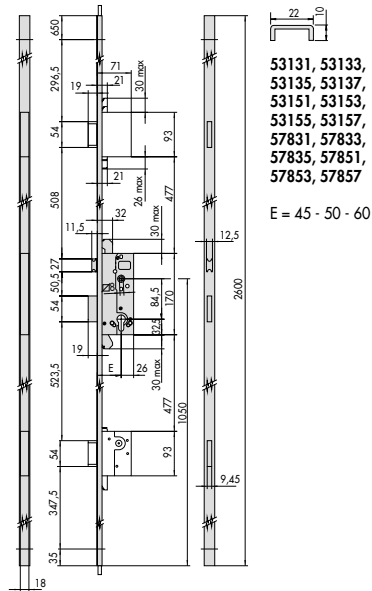


31




54570, 54571, 54580, 54581

34

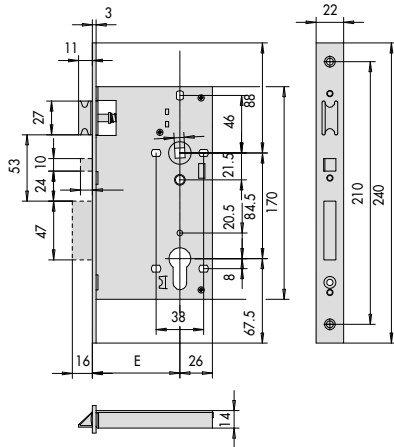


52118, 52158, 52318, 52810
52138, 52178, 52338, 52830
E = 40 - 45 - 50 - 60 - 70

29




54310, 54311, 54312, 54315, 54316,

32




54570, 54571, 54572, 54580, 54581, 54582

35

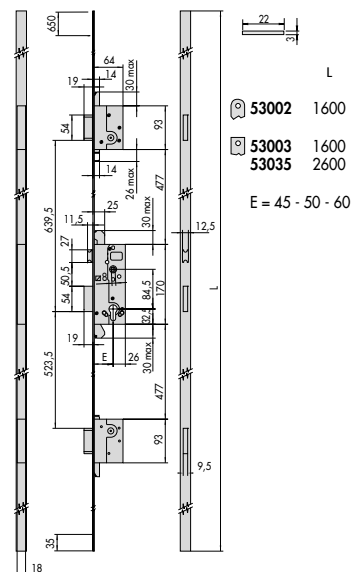


30




54340, 54341, 54342, 54350, 54352

33

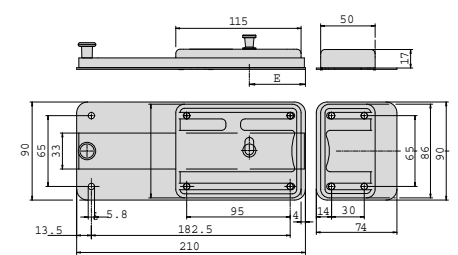


55051, 55054, 55071, 55074


36

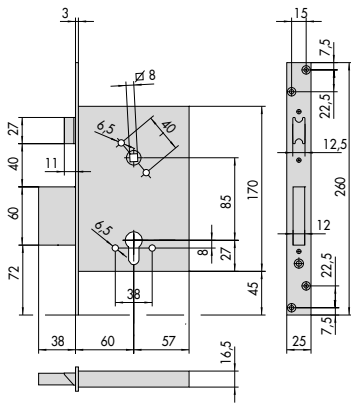

1.56250.60

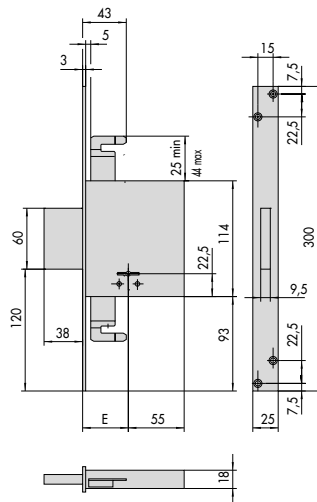

57015, 57019
E = 60 - 70
1.57055.60
E = 60

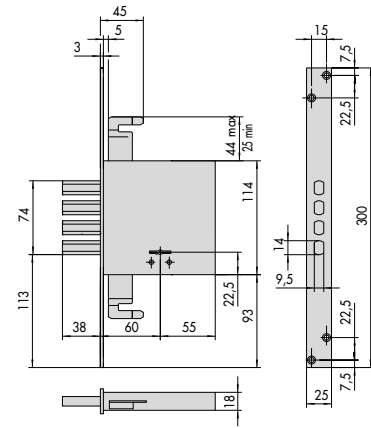


1.57033.60


37

40


43

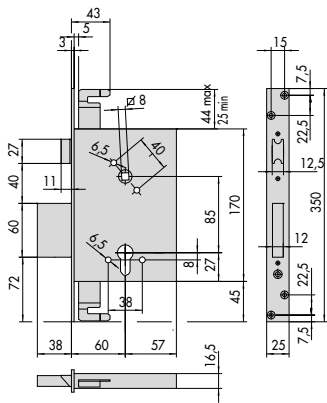

1.56255.60

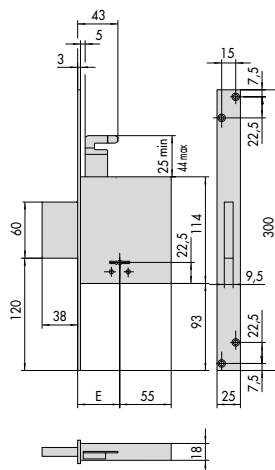

57020, 57024
E = 60 - 70

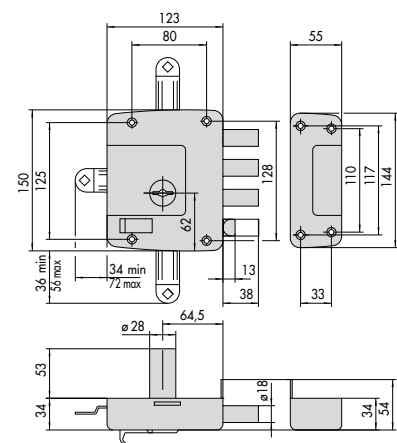


1.57110.60, 1.57115.60, 1.57120.60, 1.57125.60,
1.57130.60, 1.57135.60, 1.57150.60, 1.57155.60,
1.57160.60, 1.57165.60, 1.57170.60, 1.57175.60


38

41


44

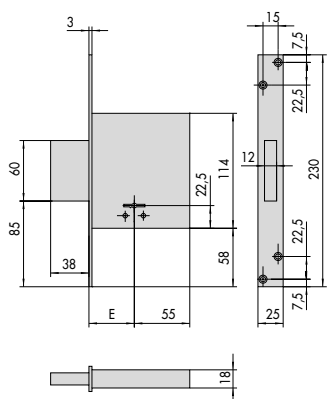

57010, 57014 57050
E = 52 - 60 - 70 E = 52 - 60

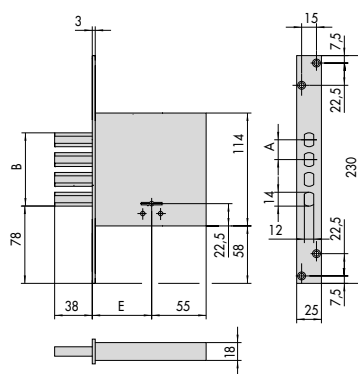

	E	A	B
1.57028.50	52	23	60
1.57028.60	60	20	74




1.57190.00


39

42


45

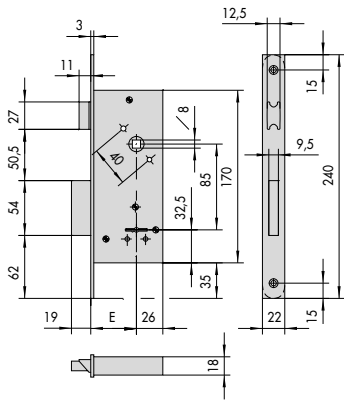

57210
57211
E = 40 - 45 - 50 - 60

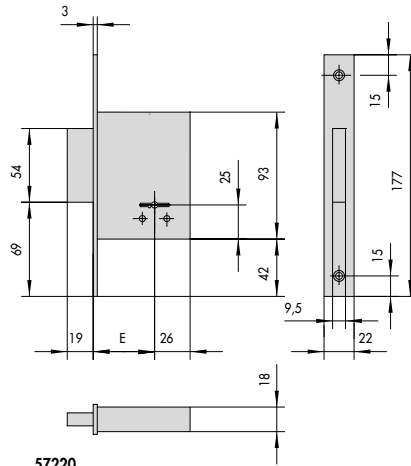

57220
E = 40 - 45 - 50 - 60

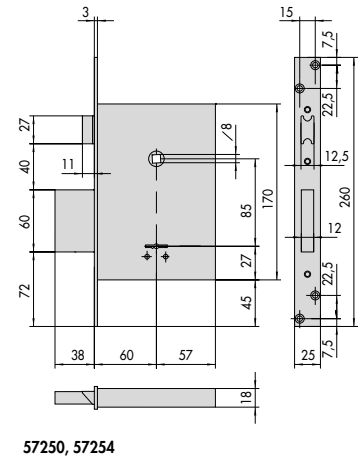


57250, 57254


46

49


52

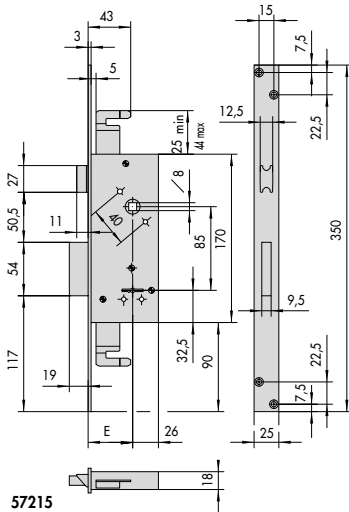

57215
E = 45 - 50 - 60

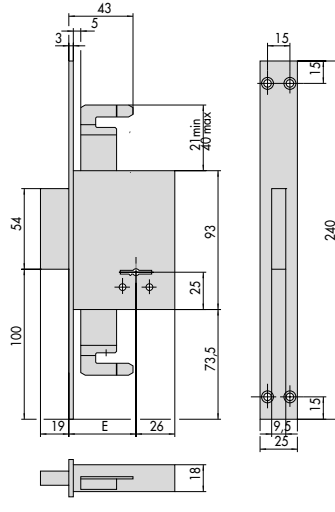

57225
E = 45 - 50 - 60

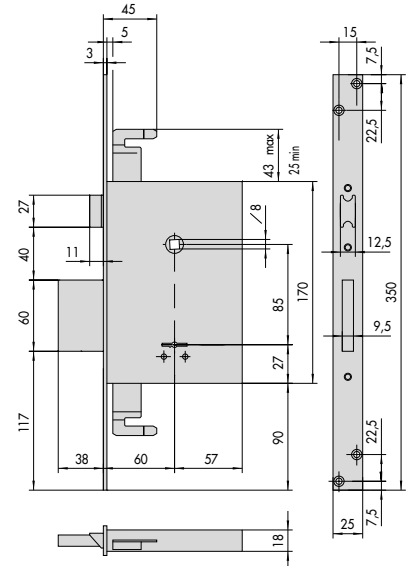


57255, 57259


47

50


53

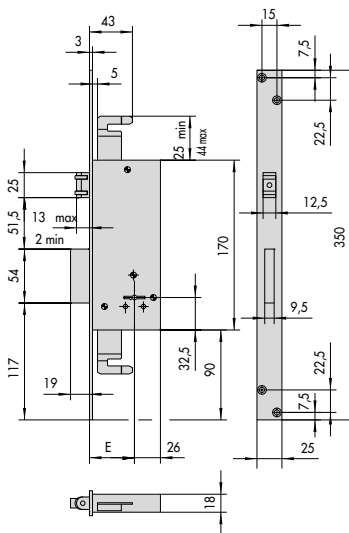

57217
E = 45 - 50 - 60

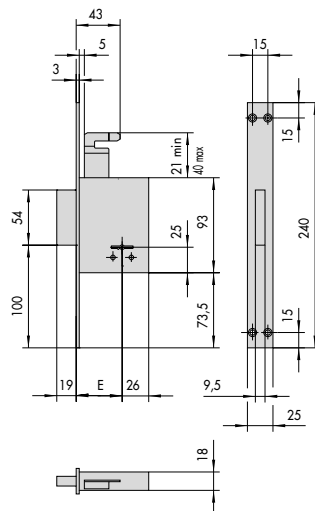

57230
E = 45 - 50 - 60

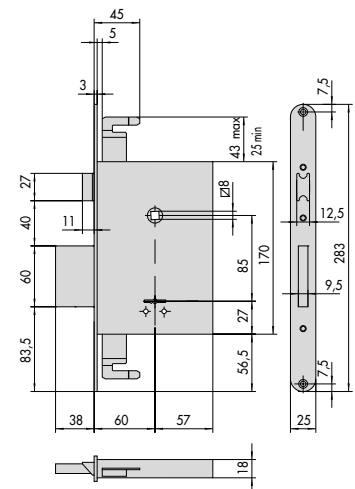


1.57256.60


48

51

54

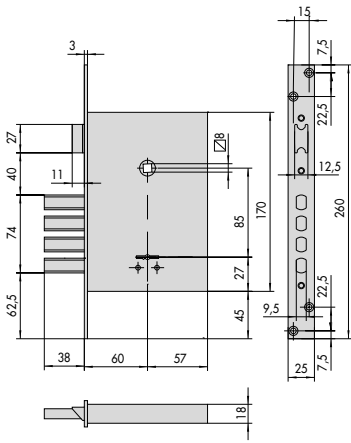


57260

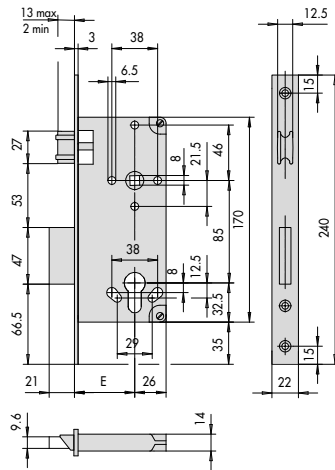

5C120, 5C621
 5C140, 5C641
 E = 35 - 40 - 45 - 50 - 60 - 70


55

58

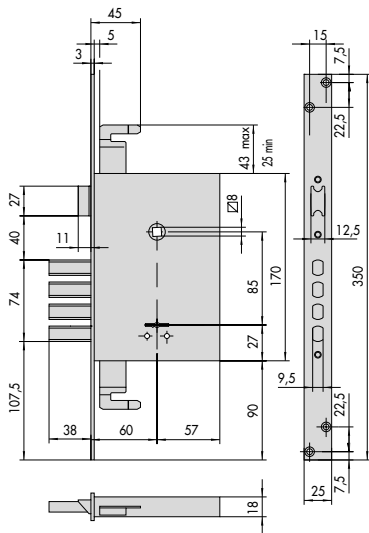

57265

56

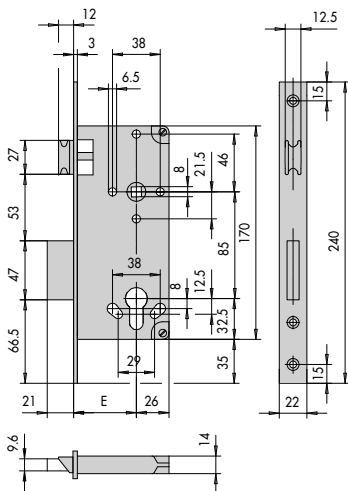

5C110, 5C150, 5C611, 5C651
 5C130, 5C170, 5C631, 5C671
 E = 35 - 40 - 45 - 50 - 60 - 70


57



Locks for armour plated doors



Exitlock system functions	344	Double-bit key mortice locks	360
Exitlock panic function rim locks	345	Double-bit key rekeyable rim locks	362
Exitlock panic function Mortice locks	346	Double-bit key rekeyable mortice locks	364
Comfortlock panic function rim locks	347	Spare keys for rekeyable double-bit key locks	366
Comfortlock panic function mortice locks.....	348	Multifunction rim locks	367
CISA E-Evolution rim powered electronic locks	349	Multifunction mortice locks	375
CISA E-Evolution mortice powered electronic locks	350	Electric strikers for armour plated door locks	383
Transponder kit and BTicino interface module	351	Locks for blocking systems	384
Cylinder rim locks Cisa Revolution Pro	352	Double-bit key cylinders	385
Cylinder mortice locks Cisa Revolution Pro	353	Protection roses	387
Cylinder rim locks with gear mechanism	354	Accessories for armour plated door locks	393
Cylinder mortice locks with gear mechanism.....	356	Dimensional drawings	402
Double-bit key rim locks.....	358		



TYPE	CONTROLS	OPERATION
<p>A</p> <p>ACCESS FROM OUTSIDE WITH KEY ONLY</p> <p>For doors to be only opened from the outside by authorized personnel using a key.</p>	<p>INSIDE</p> <p>Panic exit device to open Key to close with deadbolt</p> <p>OUTSIDE</p> <p>Key to operate the latch or deadbolt</p>	<p>1 Access from outside with key only.</p> <p>2 Access from outside only possible by using a key.</p>
<p>B</p> <p>OUTSIDE HANDLE ENABLED/DISABLED</p> <p>For doors opening to the outside and for buildings in which free access must be programmed.</p>	<p>INSIDE</p> <p>Panic exit device to open Key to close with deadbolt or enable/disable the outside handle</p> <p>OUTSIDE</p> <p>The key operates the deadbolt or enables/disables the outside handle to control the latchbolt</p>	<p>1 The outside handle can be enabled by turning the key all the way in the opening direction (the handle will continue to be enabled when the key is taken out).</p> <p>2 By closing the door with the deadbolt, the outside handle will be disabled and remain so even after opening the door via the panic exit device.</p>
<p>D</p> <p>OUTSIDE HANDLE ALWAYS ENABLED</p> <p>For doors located in passage areas (e.g. corridors).</p>	<p>INSIDE</p> <p>Panic exit device to open Key to close with deadbolt</p> <p>OUTSIDE</p> <p>Key to operate the deadbolt. The handle is enabled by the latch with the deadbolt pulled back</p>	<p>1 The outside handle is always enabled when the deadbolt is pulled back.</p> <p>2 After operating the panic exit device, access from the outside is always possible until the deadbolt is operated via the key.</p>



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric striker series 15300
- For panic exits (UNI EN 1125) Panic exit device series 59607 + horizontal bar series 07007 or item 59711.10/11

For fire door (spec. FR)

- For additional locking points
Diverting devices item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06220.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 plus horizontal bar series 07007 or item 59711-10/11
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed


Cylinder to be ordered separately



Exitlock

DEAD-BOLTS

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.



- Deadbolt and latch
- Pre-arranged for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt.

4	3,5	27	2	85	64	2,650	1	1 56917	27 0
4	3,5	28	2	85	64	2,650	1	1 56917	28 0
3	3,5	38	2	85	64	2,650	1	1 56917	38 0
4	3,5	27	2	85	64	2,550	5	1 56917	47 0
4	3,5	28	2	85	64	2,550	5	1 56917	48 0
3	3,5	38	2	85	64	2,550	5	1 56917	58 0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt. When the dead-bolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	3,5	27	2	85	64	2,650	1	1 56916	27 0
4	3,5	28	2	85	64	2,650	1	1 56916	28 0
3	3,5	38	2	85	64	2,650	1	1 56916	38 0
4	3,5	27	2	85	64	2,550	5	1 56916	47 0
4	3,5	28	2	85	64	2,550	5	1 56916	48 0
3	3,5	38	2	85	64	2,550	5	1 56916	58 0



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel faceplate
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300

- For additional locking points
Diverting devices item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06221.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 plus horizontal bar series 07007 or item 59711-10/11
- For fire door (spec. FR)
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Hand:
0 = Non-handed

Cylinder to be ordered separately



Finishes:


- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Exitlock

Type	Description	DEAD-BOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.



- Deadbolt and latch
- Pre-setting for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt.

4	28	2	85	35	67	2,800	1	1	56937	28	0		
4	28	2	85	35	67	2,650	5	1	56937	48	0		

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt. When the dead-bolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	28	2	85	35	67	2,800	1	1	56936	28	0		
4	28	2	85	35	67	2,650	5	1	56936	48	0		



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.

Finishes:

- Zinc aluminum.

Hand:


0 = Non-handed

Cylinder to be ordered separately



ComFortlock

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand



- Deadbolt and latch
- Pre-setting for additional locking points
- Operation:
- Closing from inside deadbolts operated by rotating handle upwards and/or with key.

4	3,5	27	2	85	64	2,650	1	1 56815 27 0
4	3,5	28	2	85	64	2,650	1	1 56815 28 0
3	3,5	38	2	85	64	2,650	1	1 56815 38 0
4	3,5	27	2	85	64	2,550	5	1 56815 47 0
4	3,5	28	2	85	64	2,550	5	1 56815 48 0
3	3,5	38	2	85	64	2,550	5	1 56815 58 0

Opening from inside:
latchbolt with handle and/or key
deadbolts by rotating handle downwards
(function to be selected according to user's choice)
and/or key

Closing from outside
deadbolts operated by rotating handle upwards
and/or with key

Opening from outside:
latchbolt with handle and/or key
deadbolts with key



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel faceplate
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.

Finishes:

- Zinc aluminum.

Hand:


0 = Non-handed

Cylinder to be ordered separately



ComFortlock

Type	Description	DEAD-BOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.



- Deadbolt and latch
- Pre-setting for additional locking points
- Operation:
Closing from inside
deadbolts operated by rotating handle upwards and/or with key.

Opening from inside:
latchbolt with handle and/or key
deadbolts by rotating handle downwards (function to be selected according to user's choice) and/or key

Closing from outside
deadbolts operated by rotating handle upwards and/or with key

Opening from outside:
latchbolt with handle and/or key
deadbolts with key

4	28	2	85	35	67	2,800	1	1	56835	28	0			
4	28	2	85	35	67	2,700	5	1	56835	48	0			



Technical features:

- Powered latch-bolt, dead-bolt and extension bolts for automatic operation
- Automatic closing of the door
- Emergency opening with the mechanical key
- Steel case and cover
- Zinc plated high resistant steel dead-bolt
- Non-handed zinc plated high resistant anti-picking latch-bolt
- Anti-crush plates for fixing screws
- Steel extension bolts

Supplied as standard:

- 12V - 2.3 AH lead battery
- Connecting cables

Finishes:

- Zinc plated aluminium

Standards:

- Product in compliance with European Standard EN 12209:2003

Hand:


0 = Non-handed

Cylinder to be ordered separately



CISA Evolution

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand



- Deadbolt and latchbolt
- Pre-arranged for additional locking points

4	3,5	27	85	64	3,320	1	1	E6515 27 0
4	3,5	28	85	64	4,800	1	1	E6515 28 0
3	3,5	38	85	64	3,320	1	1	E6515 38 0

TO BE DISCONTINUED



Technical features:

- Powered latch-bolt, dead-bolt and extension bolts for automatic operation
- Automatic closing of the door
- Emergency opening with the mechanical key
- Steel case and cover
- Zinc plated high resistant steel faceplated
- Zinc plated high resistant steel dead-bolt
- Non-handed zinc plated high resistant anti-picking latch-bolt
- Anti-crush plates for fixing screws
- Steel extension bolts

Supplied as standard:

- 12V - 2.3 AH lead battery
- Connecting cables

Finishes:

- Zinc plated aluminium

Standards:

- Product in compliance with European Standard EN 12209:2003

Hand:


0 = Non-handed

Cylinder to be ordered separately




CISA Evolution

Type	Description	DEAD-BOLTS							Unit weight	Pieces	ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset			Kg		Type	Dim.	Hand
	<ul style="list-style-type: none"> • Deadbolt and latchbolt • Pre-arranged for additional locking points 	4	28	85	35	67	5,300	1	1	E6535	28	0			



Type	Description	For series/item	L	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Peris.




- Carbonitrided steel outside rose
- Electronic key reader
- Inside escutcheon with push-button
- 3 electronic keys
- Brass ring
- 2 screws L. 45 mm. (M6)
- AVAILABLE FINISHES:
Polished brass (fin. 00)
Polished chrome-plated (fin. 18)
Gunbarrel grey (fin. 46)
Anodized light bronze (fin. 64)
Satin finished nickel-chrome plated (fin. B1)

0A310,0H3S0, 16,0 0,385 1 1 06525 00 0
OL3S1,0M311


0A310,0H3S0, 24,5 0,385 1 1 06525 01 0
OL3S1,0M311

0A310,0H3S0, 34,5 0,385 1 1 06525 02 0
OL3S1,0M311




- Electronic key (Transponder)

0,085 1 1 06526 00 0



- Bticino interface modul may be combined with E-Volution series locks to make locks and My Home Bticino system communicate
- supplied as standard.
Fixing screws
instruction sheet

0,385 1 1 06527 00 0



- 40 VA 12V ac transformer

0,492 1 1 07060 01 0



Technical features:

- LOCK FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED
- Effort reducer gear-operated system
- Zinc-plated steel case
- High-resistance zinc-plated reversible latch
- High resistance zinc-plated deadbolts
- Package: 1 pc or 5 pcs
- (industrial package)
- Two different dimensions are available as standard to meet various installation requirements.
- CE 12V ac voltage
- Absorbed current:3.1 A


Hand:
0 = Non-handed

Cylinder to be ordered separately




CISA Revolution PRO

Type	Description	DEAD-BOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.




- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-arranged for additional locking points

4	3,5	28	2	85	64	2,660	1	1	15515 28 B
3	3,5	38	2	85	64	2,520	1	1	15515 38 B
4	3,5	28	2	85	64	2,430	1	1	15515 48 B
3	3,5	38	2	85	64	2,220	1	1	15515 58 B




- Deadbolt only
- Pre-arranged for additional locking points

5	3,5	28	2	85	64	2,370	1	1	56505 28 B
4	3,5	38	2	85	64	2,370	1	1	56505 38 B
5	3,5	28	2	85	64	2,370	5	1	56505 48 B



- Deadbolt and latch
- Pre-arranged for additional locking points

4	3,5	25	2	85	64	2,650	1	1	56515 28 B
3	3,5	38	2	85	64	2,320	1	1	56515 38 B
4	3,5	28	2	85	64	2,346	5	1	56515 48 B
3	3,5	38	2	85	64	2,300	5	1	56515 58 B



- Deadbolt only
- Pre-arranged for additional locking points

4	3,5	28	2	85	64	2,550	1	1	B6515 28 B
3	3,5	38	2	85	64	2,550	1	1	B6515 38 B
4	3,5	28	2	85	64	2,620	5	1	B6515 48 B
3	3,5	38	2	85	64	2,620	5	1	B6515 58 B



Technical features:

- LOCK FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED
- Effort reducer gear-operated system
- Zinc-plated steel case
- High-resistance zinc-plated reversible latch
- High resistance zinc-plated deadbolts
- High resistance zinc-plated steel faceplate
- Package: 1 pc or 5 pcs (industrial packing)
- Two different dimensions are available as standard to meet various installation requirements.
- CE 12V ac voltage
- Absorbed current: 3.1 A

Hand:


0 = Non-hande

Cylinder to be ordered separately




CISA Revolution PRO

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand




- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-arranged for additional locking points

4	28	2	85	35	67	2,790	1	1	15535	28	B			
4	28	2	85	35	67	2,490	5	1	15535	48	B			




- Deadbolt only
- Pre-arranged for additional locking points

5	28	2	85	35	67	2,650	1	1	56525	28	B			
5	28	2	85	35	67	2,600	5	1	56525	48	B			



- Deadbolt and latch
- Pre-arranged for additional locking points

4	28	2	85	35	67	2,800	1	1	56535	28	B			
4	28	2	85	35	67	2,600	5	1	56535	48	B			



- Deadbolt and latch
- Pre-arranged for additional locking points

4	28	2	85	35	67	3,100	1	1	B6535	28	B			
4	38	2	85	35	67	2,600	1	1	B6535	38	B			
4	28	2	85	35	67	2,300	5	1	B6535	48	B			
4	38	2	85	35	67	2,300	5	1	B6535	58	B			



Technical features:

- Geared operating device for reduced key effort
- Zinc plated steel case
- Zinc plated high resistant reversible latch
- Zinc plated high resistant steel bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Hand:


0 = Non-handed

Cylinder to be ordered separately



Revolution


Type	Description	DEAD-BOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.



- Dead-bolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-arranged for additional locking points

4	3,5	25	2	85	64	2,520	1	1	15515 25 0
4	3,5	27	2	85	64	2,520	1	1	15515 27 0
4	3,5	28	2	85	64	2,660	1	1	15515 28 0
3	3,5	38	2	85	64	2,520	1	1	15515 38 0
4	3,5	27	2	85	64	2,220	5	1	15515 47 0
4	3,5	28	2	85	64	2,430	5	1	15515 48 0
3	3,5	38	2	85	64	2,220	5	1	15515 58 0


TO BE DISCONTINUED



- Dead-bolt only
- Pre-arranged for additional locking points

5	3,5	25	2	85	64	2,370	1	1	56505 25 0
5	3,5	27	2	85	64	2,370	1	1	56505 27 0
5	3,5	28	2	85	64	2,370	1	1	56505 28 0
4	3,5	32	2	85	64	2,370	1	1	56505 32 0
4	3,5	38	2	85	64	2,370	1	1	56505 38 0
5	3,5	28	2	85	64	2,235	5	1	56505 48 0
4	3,5	38	2	85	64	2,240	5	1	56505 58 0

TO BE DISCONTINUED



- Dead-bolt and latch
- Pre-arranged for additional locking points


4	3,5	25	2	85	64	2,320	1	1	56515 25 0
4	3,5	27	2	85	64	2,320	1	1	56515 27 0
4	3,5	28	2	85	64	2,650	1	1	56515 28 0
3	3,5	32	2	85	64	2,320	1	1	56515 32 0
3	3,5	38	2	85	64	2,320	1	1	56515 38 0
4	3,5	28	2	85	64	2,346	5	1	56515 48 0
3	3,5	38	2	85	64	2,300	5	1	56515 58 0

4	3,5	27	2	92	64	2,320	1	1	56615 27 0
4	3,5	28	2	92	64	2,320	1	1	56615 28 0
4	3,5	27	2	92	64	2,020	5	1	56615 47 0
4	3,5	28	2	92	64	2,370	5	1	56615 48 0

TO BE DISCONTINUED


3	3,5	38	2	92	64	2,360	5	1	56615 58 0
---	-----	----	---	----	----	-------	---	---	------------

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre distance	Throws	Centre distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.




- Dead-bolt only
- Pre-arranged for additional locking points

5	3,5	28	2	85	64	2,370	1	1	B6505 28 0
4	3,5	38	2	85	64	2,370	1	1	B6505 38 0
5	3,5	28	2	85	64	2,070	1	1	B6505 48 0
4	3,5	38	2	85	64	2,070	1	1	B6505 58 0



- Dead-bolt and latchbolt
- Pre-arranged for additional locking points

4	3,5	25	2	85	64	2,550	1	1	B6515 25 0
4	3,5	28	2	85	64	2,550	1	1	B6515 28 0
3	3,5	38	2	85	64	2,550	1	1	B6515 38 0
4	3,5	28	2	85	64	2,620	1	1	B6515 48 0
3	3,5	38	2	85	64	2,600	1	1	B6515 58 0



- Dead-bolt and latchbolt
- Pre-arranged for additional locking points

4	3,5	28	2	92	64	2,550	1	1	B6615 28 0
3	3,5	38	2	92	64	2,550	1	1	B6615 38 0
4	3,5	28	2	92	64	2,020	5	1	B6615 48 0
3	3,5	38	2	92	64	2,020	5	1	B6615 58 0



Technical features:

- Geared operating device for reducing key effort
- Zinc plated steel case
- Zinc plated high resistant satin steel faceplate
- Zinc plated high resistant reversible latch
- Zinc plated high resistant steel dead-bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE


Hand:
0 = Non-handed

Cylinder to be ordered separately




Revolution

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand




- Dead-bolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-arranged for additional locking points

4	28	2	85	35	67	2,790	1	1	15535 28 0
4	28	2	85	35	67	2,490	5	1	15535 48 0



- Dead-bolt only
- Pre-arranged for additional locking points


5	28	2	85	35	67	2,650	1	1	56525 28 0
5	28	2	85	35	67	2,600	5	1	56525 48 0



- Dead-bolt and latch
- Pre-arranged for additional locking points


4	28	2	85	35	67	2,800	1	1	56535 28 0
4	28	2	85	35	67	2,600	5	1	56535 48 0

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.



- Dead-bolt only
- Pre-arranged for additional locking points

5	28	2	85	35	67	2,650	1	1	B6525	28	0		
5	38	2	85	35	67	2,650	1	1	B6525	38	0		
5	28	2	85	35	67	2,350	5	1	B6525	48	0		
5	38	2	85	35	67	2,350	5	1	B6525	58	0		



- Dead-bolt and latch
- Pre-arranged for additional locking points

4	28	2	85	35	67	3,100	1	1	B6535	28	0		
4	38	2	85	35	67	2,600	1	1	B6535	38	0		
4	28	2	85	35	67	2,300	5	1	B6535	48	0		
4	38	2	85	35	67	2,300	5	1	B6535	58	0		



Technical features:

- Zinc plated steel case
- Zinc plated high resistant reversible latch
- Zinc plated high resistant steel bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Supplied as standard:

- Keys
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0


Hand:

0 = Non-handed


Operation:

- VERSION WITH CONSTRUCTION KEY:
the key operates the latch
- VERSION WITH SERVICE KEY:
the key operates the latch and first 2 throws

Type	Description	Key item	DEAD-BOLTS								ITEM	
			No.	Projection	Distance	Throws	Centre Distance	Facplate	Backset	Unit weight	Pieces	Type




- Dead-bolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-arranged for additional locking points




3 Art. 1 00123 00 1

4	3,5	25	4	85	64	2,570	1	1	17515 25 0
4	3,5	27	4	85	64	2,570	1	1	17515 27 0
4	3,5	28	4	85	64	2,570	1	1	17515 28 0
3	3,5	32	4	85	64	2,570	1	1	17515 32 0
3	3,5	38	4	85	64	2,570	1	1	17515 38 0
4	3,5	27	4	85	64	2,270	5	1	17515 47 0
4	3,5	28	4	85	64	2,270	5	1	17515 48 0
3	3,5	38	4	85	64	2,270	5	1	17515 58 0

TO BE DISCONTINUED



- Dead-bolt only
- Pre-arranged for additional locking points




3 Art. 1 00123 00 1


5	3,5	25	4	85	64	2,380	1	1	57505 25 0
5	3,5	27	4	85	64	2,380	1	1	57505 27 0
5	3,5	28	4	85	64	2,380	1	1	57505 28 0
4	3,5	32	4	85	64	2,380	1	1	57505 32 0
4	3,5	38	4	85	64	2,380	1	1	57505 38 0

TO BE DISCONTINUED

- SERVICE KEY VERSION
- Dead-bolt only
- Pre-arranged for additional locking points




3 art. 1 00123 00 1



1 art. 1 00120 00 1 service key

5	3,5	28	4	85	64	2,400	1	1	57506 28 0
4	3,5	38	4	85	64	2,400	1	1	57506 38 0


- Dead-bolt only
- Pre-arranged for additional locking points
- Cover plate item 1.06228.00.0



3 Art. 1 00123 00 1

5	43,5	28	4	85	64	2,580	1	1	57507 28 0
---	------	----	---	----	----	-------	---	---	------------

Type	Description	Key item	DEAD-BOLTS							Kg	Pieces	ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset			Unit weight	Type	Dim.	Hand	Fin.



- Dead-bolt and latch
- Pre-arranged for additional locking points

	4	3,5	28	4	85	64	2,430	1	1 57515 08 0
2 Art. 1 00125 00									
	1								1 00120 00

- Dead-bolt and latch
- Pre-arranged for additional locking points

	4	3,5	25	4	85	64	2,430	1	1 57515 25 0
3 Art. 1 00123 00 1	4	3,5	27	4	85	64	2,600	1	1 57515 27 0
	4	3,5	28	4	85	64	2,600	1	1 57515 28 0
	3	3,5	32	4	85	64	2,430	1	1 57515 32 0
	3	3,5	38	4	85	64	2,430	1	1 57515 38 0
	4	3,5	28	4	85	64	2,260	5	1 57515 48 0

- CONSTRUCTION KEY VERSION
- Dead-bolt and latch
- Pre-arranged for additional locking points


	4	3,5	28	4	85	64	2,450	5	1 57515 68 0
3 art. 1 00123 00 1									
	1								1 art. 1 00120 00 1 construction key

- SERVICE KEY VERSION
- Dead-bolt and latch
- Pre-arranged for additional locking points

	4	3,5	28	4	85	64	2,450	1	1 57516 28 0
3 art. 1 00123 00 1	3	3,5	38	4	85	64	2,450	1	1 57516 38 0
	1								1 art. 1 00120 00 1 service key


- Dead-bolt and latch
- Pre-arranged for additional locking points
- Cover plate item 1.06228.00.0

	4	43,5	28	4	85	64	2,630	1	1 57517 28 0
3 Art. 1 00123 00 1	3	43,5	38	4	85	64	2,630	1	1 57517 38 0



- Dead-bolt only
- Pre-arranged for additional locking points

	5	3,5	25	4	85	64	2,380	1	1 B7505 25 0
3 Art. 1 00123 00 1	5	3,5	28	4	85	64	2,380	1	1 B7505 28 0
	4	3,5	38	4	85	64	2,380	1	1 B7505 38 0
	5	3,5	28	4	85	64	2,380	5	1 B7505 48 0
	4	3,5	38	4	85	64	2,380	5	1 B7505 58 0



- Dead-bolt and latch
- Pre-arranged for additional locking points

	4	3,5	25	4	85	64	2,430	1	1 B7515 25 0
3 Art. 1 00123 00 1	4	3,5	28	4	85	64	2,800	1	1 B7515 28 0
	3	3,5	38	4	85	64	2,685	1	1 B7515 38 0
	4	3,5	28	4	85	64	2,590	5	1 B7515 48 0
	3	3,5	38	4	85	64	2,500	5	1 B7515 58 0



Technical features:

- Zinc plated steel case
- Zinc plated high resistant satin steel faceplate
- Zinc plated high resistant reversible latch
- Zinc plated high resistant steel dead-bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- **VERSION WITH CONSTRUCTION KEY:**
the key operates the latch
- **VERSION WITH SERVICE KEY:**
the key operates the latch and first 2 throws


Supplied as standard:

- Keys
- Inside escutcheon item 1.06143.02.0
- Outside escutcheon item 1.06082.01.0


Hand:

0 = Non-handed

Type	Description	Key item	DEAD-BOLTS							Unit weight	Pieces	ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset			Kg	Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-arranged for additional locking points




3 art. 1 00122 00 1

4	28	4	85	35	67	2,840	1	1	17535 28 0
4	28	4	85	35	67	2,540	5	1	17535 48 0




- Dead-bolt only
- Pre-arranged for additional locking points




3 art. 1 00122 00 1

5	28	4	85	35	67	2,750	1	1	57525 28 0
---	----	---	----	----	----	-------	---	---	------------

- **SERVICE KEY VERSION**
- Dead-bolt only
- Pre-arranged for additional locking points




3 art. 1 00122 00 1




1 art. 1 00121 00 1 service key

5	28	4	85	35	67	2,600	1	1	57526 28 0
---	----	---	----	----	----	-------	---	---	------------

Type	Description	Key item	DEAD-BOLTS								ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.




- Dead-bolt only
- Pre-arranged for additional locking points




3 art. 1 00122 00 1

4	28	4	85	35	67	2,780	1	1 57535 28 0
4	28	4	85	35	67	2,500	5	1 57535 48 0

- CONSTRUCTION KEY VERSION
- Dead-bolt and latch
- Pre-arranged for additional locking points




3 art. 1 00122 00 1



1 art. 1 00121 00 1
construction key

4	28	4	85	35	67	2,520	5	1 57535 68 0
4	28	4	85	35	67	2,800	1	1 57535 88 0

- SERVICE KEY VERSION
- Dead-bolt and latch
- Pre-arranged for additional locking points




3 art. 1 00122 00 1




1 art. 1 00121 00 1
service key

5	28	4	85	35	67	2,800	1	1 57536 28 0
---	----	---	----	----	----	-------	---	--------------




- Dead-bolt only
- Pre-arranged for additional locking points




3 art. 1 00122 00 1

5	28	4	85	35	67	2,580	1	1 B7525 28 0
5	38	4	85	35	67	2,580	1	1 B7525 38 0
5	28	4	85	35	67	2,580	5	1 B7525 48 0
5	38	4	85	35	67	2,580	5	1 B7525 58 0



- Dead-bolt and latch
- Pre-arranged for additional locking points



3 art. 1 00122 00 1

4	28	4	85	35	67	3,100	1	1 B7535 28 0
4	38	4	85	35	67	2,780	1	1 B7535 38 0
4	28	4	85	35	67	2,600	5	1 B7535 48 0
4	38	4	85	35	67	2,600	5	1 B7535 58 0



Technical features:

- The NEW CAMBIO FACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc plated steel case
- Zinc plated high resistant reversible latch
- Zinc plated high resistant, steel dead-bolts
- Pre-arranged for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws

Hand:
A = Non-handed

Supplied as standard:


- Keys
- Re-keying tool
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

Standards:


- **New manipulation and picking protection system: active on all six levers to block the lock in the event of burglary attempts**
European Patent EP 2212493 B1

New CambioFacile

Type	Description	Key item	DEAD-BOLTS								ITEM	
			No.	Projection	Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand Fin. Pers. Spec.




- CONSTRUCTION KEY VERSION
- Dead-bolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0




3 art. 1 00163 00 1	4	3,5	27	4	85	64	2,750	1	1	17665 27 A
	4	3,5	28	4	85	64	2,750	1	1	17665 28 A
	4	3,5	38	3	85	64	2,750	1	1	17665 38 A
1 art. 1 00120 00 1	4	3,5	27	4	85	64	2,450	5	1	17665 47 A
construction key	4	3,5	28	4	85	64	2,450	5	1	17665 48 A
	3	3,5	38	4	85	64	2,450	5	1	17665 58 A

TO BE DISCONTINUED




- CONSTRUCTION KEY VERSION
- Dead-bolt only




3 art. 1 00163 00 1	5	3,5	25	4	85	64	2,550	1	1	57655 25 A
	5	3,5	27	4	85	64	2,550	1	1	57655 27 A
	5	3,5	28	4	85	64	2,550	1	1	57655 28 A
1 art. 1 00120 00 1	4	3,5	32	4	85	64	2,550	1	1	57655 32 A
construction key	4	3,5	38	4	85	64	2,550	1	1	57655 38 A
	5	3,5	27	4	85	64	2,250	5	1	57655 47 A
	5	3,5	28	4	85	64	2,250	5	1	57655 48 A
	4	3,5	38	4	85	64	2,250	5	1	57655 58 A

TO BE DISCONTINUED




- CONSTRUCTION KEY VERSION
- Dead-bolt and latch




3 art. 1 00163 00 1	4	3,5	25	4	85	64	2,700	1	1	57665 25 A
	4	3,5	27	4	85	64	2,700	1	1	57665 27 A
	4	3,5	28	4	85	64	2,700	1	1	57665 28 A
1 art. 1 00120 00 1	3	3,5	32	4	85	64	2,700	1	1	57665 32 A
construction key	3	3,5	38	4	85	64	2,700	1	1	57665 38 A
	4	3,5	27	4	85	64	2,400	5	1	57665 47 A
	4	3,5	28	4	85	64	2,400	5	1	57665 48 A
	3	3,5	38	4	85	64	2,400	5	1	57665 58 A

TO BE DISCONTINUED




- VERSION WITH CONSTRUCTION KEY
- Deadbolt only





3 art. 1 00163 00 1	5	3,5	28	4	85	64	2,550	1	1	B7655 28 A
	4	3,5	38	4	85	64	2,550	5	1	B7655 38 A
1 art. 1 00120 00 1	5	3,5	28	4	85	64	2,250	5	1	B7655 48 A
construction key	4	3,5	38	4	85	64	2,250	5	1	B7655 58 A

Type	Description	Key item	DEAD-BOLTS							ITEM			
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim. Hand



- VERSION WITH CONSTRUCTION KEY
- Deadbolt and latchbolt

	4	3,5	28	4	85	64	2,700	1	1 B7665 28 A			
3 art. 1 00163 00 1	3	3,5	38	4	85	64	2,700	1	1 B7665 38 A			
	4	3,5	28	4	85	64	2,400	5	1 B7665 48 A			
1 art. 1 00120 00 1 construction key	3	3,5	38	4	85	64	2,400	5	1 B7665 58 A			



Technical features:

- The NEW CAMBIO FACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc plated steel case
- Zinc plated high resistant satin steel faceplate
- Zinc plated high resistant reversible latch
- Zinc plated high resistant, steel dead-bolts
- Pre-arranged for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws

Hand:
A = Non-handed

Supplied as standard:


- Keys
- Re-keying tool
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

On request:


- **New manipulation and picking protection system: active on all six levers to block the lock in the event of burglary attempts**
- European Patent EP 2212493 B1

New CambioFacile


Type	Description	Key item	DEAD-BOLTS								ITEM	
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type




- CONSTRUCTION KEY VERSION
- Dead-bolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0




3 art.	4	28	4	85	35	67	3,000	1	1	17685 28 A
1 00162 00 1	4	28	4	85	35	67	2,850	5	1	17685 48 A




1 art.	1	00120 00 1								
--------	---	------------	--	--	--	--	--	--	--	--




- CONSTRUCTION KEY VERSION
- Dead-bolt only




3 art.	5	28	4	85	35	67	2,800	1	1	57675 28 A
1 00162 00 1	5	28	4	85	35	67	2,600	5	1	57675 48 A




1 art.	1	00120 00 1								
--------	---	------------	--	--	--	--	--	--	--	--



- CONSTRUCTION KEY VERSION
- Dead-bolt and latch




3 art.	4	28	4	85	35	67	2,950	1	1	57685 28 A
1 00162 00 1	4	28	4	85	35	67	2,650	5	1	57685 48 A






1 art.	1	00120 00 1								
--------	---	------------	--	--	--	--	--	--	--	--

Type	Description	Key item	DEAD-BOLTS								ITEM				
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.		










- VERSION WITH CONSTRUCTION KEY
- Deadbolt only

	5	28	4	85	35	67	2,800	1	1	B7675 28 A
	3 art. 1 00162 00 1	4	38	4	85	35	67	2,800	1	B7675 38 A
	5	28	4	85	35	67	2,500	5	1	B7675 48 A
	1 art. 1 00120 00 1 construction key	4	38	4	85	35	67	2,500	5	B7675 58 A



- VERSION WITH CONSTRUCTION KEY
- Deadbolt and latchbolt

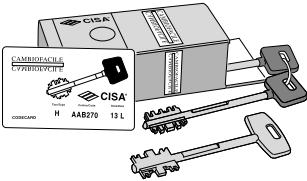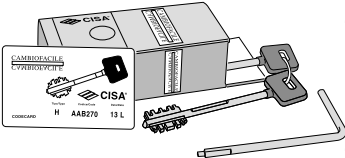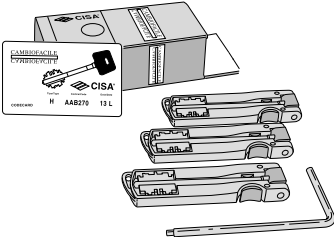	4	28	4	85	35	67	2,950	1	1	B7685 28 A
	3 art. 1 00162 00 1	3	38	4	85	35	67	2,950	1	B7685 38 A
	3	38	4	85	35	67	2,650	5	1	B7685 58 A
	1 art. 1 00120 00 1 construction key									

Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.
 <p>CambioFacile</p>	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 1 change key 	0,135	1	1	06520	00	1
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00162.00.1 1 change key 	0,185	1	1	06520	01	1
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 1 change key 	0,145	1	1	06520	10	1
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5keys item 1.00163.00.1 1 change key 	0,200	1	1	06520	11	1
 <p>New CambioFacile</p>	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 1 change key 	0,130	1	1	06520	50	1
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00162.00.1 1 change key 	0,185	1	1	06520	51	1
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 1 change key 	0,130	1	1	06520	60	1
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00163.00.1 1 change key 	0,190	1	1	06520	61	1
 <p>New CambioFacile</p>	<ul style="list-style-type: none"> STANDARD SUPPLY: 3 keys item 1.00170.00.1 1 changing tool 	0,130	1	1	06520	55	1
	<ul style="list-style-type: none"> STANDARD SUPPLY: 3 keys item 1.00171.00.1 1 changing tool 	0,130	1	1	06520	65	1
	<ul style="list-style-type: none"> Group of construction keys for rekeyable armoured door locks NEW CAMBIO FACILE SUPPLIED AS STANDARD: 1 construction key (Italian biting) 	0,033	1	1	06521	50	1
	<ul style="list-style-type: none"> Changing tool for NEW CAMBIO FACILE locks 	0,045	10	1	06522	00	0



Technical features:

- Zinc plated steel case
- Zinc plated high resistant steel dead-bolts:
n° 4 for the lower lock
n° 1 for the upper lock
- Zinc plated high resistant reversible latch
- Can be fitted with additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- VERSION WITH SECURITY FUNCTION: the upper lock blocks the lower lock when the latter is locked
- VERSION WITH SERVICE KEY: the upper lock key operates the latch and upper dead-bolt
- VERSION WITH SERVICE KEY AND OPENING LIMITING DEVICE: the upper lock key operates the latch and

upper dead-bolt; the opening limiting device is activated by operating the first throw of the upper lock

Supplied as standard:

- Keys (only for those items with double-bit key locks)

Standards:


- **New manipulation and picking protection system on NEW CAMBIO FACILE locks: active on all six levers to block the lock in the event of burglary attempts**

European Patent EP 2212493 B1


Cylinder to be ordered separately




Type	Description	Key item	DEAD-BOLTS						Kg	Pieces	ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate	Backset			Type	Dim.	Hand	Fin.



- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- Double bitted 6 lever main lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0




3,5	28	85	64	3,100	1	1 17766 28 0
3,5	28	85	64	2,880	5	1 17766 48 0






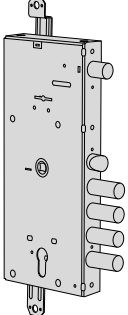




- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- 2 throw main cylinder lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0


3,5	28	85	64	2,900	1	1 16766 28 0
3,5	28	85	64	3,140	5	1 16766 48 0




- VERSION WITH SERVICE LOCK
- 2-throw secondary cylinder lock
- 2-throw main cylinder lock
- **FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)**
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0

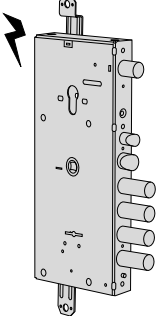
3,5	28	85	64	2,900	1	1 16766 28 B
3,5	28	85	64	3,140	5	1 16766 48 B

Type	Description	Key item	DEAD-BOLTS							ITEM						
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bit 6 lever NEW CAMBIO FACILE main lock with construction key, 4 throws • Electric operation self locking latchbolt • Slide item 1.06224.50.0 	 3 art. 1 00163 00 1	3,5	28	85	64	3,500	1	1	17966	28	A				
			3,5	28	85	64	3,200	5	1	17966	48	A				
		 1 art. 1 00120 00 1 construction key														
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	56715	28	0				
			3,5	28	85	64	2,800	5	1	56715	48	0				
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	56715	28	B				
			3,5	28	85	64	2,800	5	1	56715	48	B				
<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	56716	28	0					
		3,5	28	85	64	2,800	5	1	56716	48	0					
<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	56716	28	B					
		3,5	28	85	64	2,800	5	1	56716	48	B					

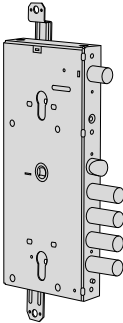Type	Description	Key item	DEAD-BOLTS							ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws 		3,5	28	85	64	2,900	1	1	56765	28	0	
			3,5	28	85	64	3,100	5	1	56765	48	0	
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		3,5	28	85	64	2,900	1	1	56765	28	B	
			3,5	28	85	64	3,100	5	1	56765	48	B	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws 		3,5	28	85	64	2,900	1	1	56766	28	0	
			3,5	28	85	64	3,100	5	1	56766	48	0	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		3,5	28	85	64	2,900	1	1	56766	28	B	
			3,5	28	85	64	3,100	5	1	56766	48	B	

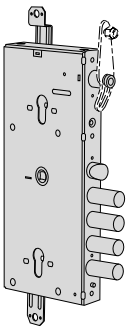Type	Description	Key item	DEAD-BOLTS							ITEM						
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56767	28	0				
			3,5	28	85	64	2,600	5	1	56767	48	0				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56768	28	B				
			3,5	28	85	64	2,600	5	1	56768	48	B				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56768	28	0				
			3,5	28	85	64	3,140	5	1	56768	48	0				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56768	28	B				
			3,5	28	85	64	3,140	5	1	56768	48	B				

Type	Description	Key item	DEAD-BOLTS							ITEM				
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Peris. Spec.	



- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws

3,5	28	85	64	2,900	1	1	B6764 28 0
3,5	38	85	64	2,900	1	1	B6764 38 0
3,5	28	85	64	3,100	5	1	B6764 48 0
3,5	38	85	64	3,100	5	1	B6764 58 0

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws

3,5	28	85	64	2,900	1	1	B6765 28 0
3,5	38	85	64	2,900	1	1	B6765 38 0
3,5	28	85	64	3,100	5	1	B6765 48 0
3,5	38	85	64	3,100	5	1	B6765 58 0


- VERSION WITH SERVICE LOCK Secondary cylinder lock, 2 throws Main cylinder lock, 2 throws

3,5	28	85	64	2,900	1	1	B6766 28 0
3,5	38	85	64	2,900	1	1	B6766 38 0
3,5	38	85	64	3,100	5	1	B6766 58 0


- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws Main cylinder lock, 2 throws

3,5	28	85	64	2,900	1	1	B6766 28 B
3,5	38	85	64	2,900	1	1	B6766 38 B
3,5	38	85	64	3,100	1	1	B6766 48 B
3,5	38	85	64	3,100	5	1	B6766 58 B

- FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)




- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




3,5	28	85	64	3,100	1	1	57765 28 0
3,5	28	85	64	2,900	5	1	57765 48 0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




3,5	28	85	64	3,100	1	1	57766 28 0
3,5	28	85	64	2,900	5	1	57766 48 0

Type	Description	Key item	DEAD-BOLTS							ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand




- VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws
- TO ORDER SEPARATELY:
Limiting device chain item 1.06421.10.1/2




3,5	28	85	64	3,100	1	1	57767 28 0
3,5	28	85	64	2,900	5	1	57767 48 0


- VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY
- Secondary thumb turn lock, 2 throws
- Double bit 6 lever main lock, 4 throws
- TO ORDER SEPARATELY:
Limiting device chain item 1.06421.10.1/2



3,5	28	85	64	3,100	1	1	57768 28 0
-----	----	----	----	-------	---	---	------------




- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




3,5	28	85	64	3,100	1	1	B7764 28 0
3,5	38	85	64	3,100	1	1	B7764 38 0
3,5	28	85	64	2,900	5	1	B7764 48 0
3,5	38	85	64	2,900	5	1	B7764 58 0

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




















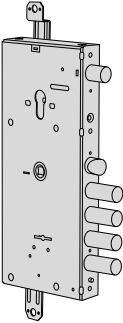

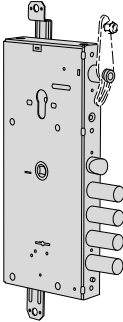3,5	38	85	64	3,100	1	1	B7765 38 0
3,5	28	85	64	2,900	5	1	B7765 48 0
3,5	38	85	64	2,900	5	1	B7765 58 0

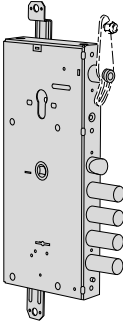- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws

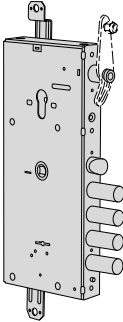

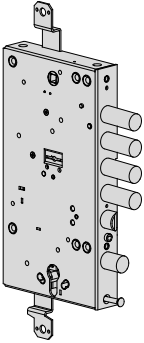3,5	28	85	64	3,100	1	1	B7766 28 0
3,5	38	85	64	3,100	1	1	B7766 38 0
3,5	28	85	64	2,900	5	1	B7766 48 0
3,5	38	85	64	2,900	5	1	B7766 58 0

Type	Description	Key item	DEAD-BOLTS						ITEM				
			No.	Projection Distance	Throws	Centre Distance	Facaplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1	57965	28	A	
		 1 art. 1 00120 00 1 construction key	3,5	28	85	64	3,100	5	1	57965	48	A	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1	57966	28	A	
		 1 art. 1 00120 00 1 construction key	3,5	28	85	64	3,100	5	1	57966	48	A	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1	57967	28	A	
		 1 art. 1 00120 00 1 construction key											
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00163 00 1	3,5	28	85	64	3,100	5	1	57968	48	A	
		 1 art. 1 00120 00 1 construction key											

Type	Description	Key item	DEAD-BOLTS							ITEM								
			No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws, NEW CAMBIO FACILE, with construction key 	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	3,5	28	85	64	3,400	1	1	B7964 28 A								
			3,5	38	85	64	3,400	1	1	B7964 38 A								
			3,5	28	85	64	3,100	5	1	B7964 48 A								
			3,5	38	85	64	3,100	5	1	B7964 58 A								
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	3,5	28	85	64	3,400	1	1	B7965 28 A								
			3,5	38	85	64	3,400	1	1	B7965 38 A								
			3,5	28	85	64	3,100	5	1	B7965 48 A								
			3,5	38	85	64	3,100	5	1	B7965 58 A								
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	3,5	28	85	64	3,400	1	1	B7966 28 A								
			3,5	38	85	64	3,400	1	1	B7966 38 A								
			3,5	28	85	64	3,100	5	1	B7966 48 A								
			3,5	38	85	64	3,100	5	1	B7966 58 A								



Technical features:

- Zinc plated steel case
- Zinc plated high resistant satin steel faceplate
- Zinc plated high resistant steel dead-bolts:
n° 4 for the lower lock
n° 1 for the upper lock
- Zinc plated high resistant reversible latch
- Can be fitted with additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- **VERSION WITH SECURITY FUNCTION:** the upper lock blocks the lower lock when the latter is locked

- **VERSION WITH SERVICE KEY:** the upper lock key operates the latch and upper dead-bolt
- **VERSION WITH SERVICE KEY AND OPENING LIMITING DEVICE:** the upper lock key operates the latch and upper dead-bolt; the opening limiting device is activated by operating the first throw of the upper lock

Cylinder to be ordered separately




Supplied as standard:

- Keys (only for those items with double-bit key locks)


Standards:

- **New manipulation and picking protection system on NEW CAMBIO FACILE locks:** active on all six levers to block the lock in the event of burglary attempts
European Patent EP 2212493 B1


Type	Description	Key item	DEAD-BOLTS							ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.

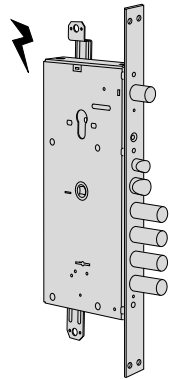

- **VERSION WITH SERVICE LOCK**
- 2 throw secondary cylinder lock
- Double bitted 6 lever main lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0



28	85	35	67	3,600	1	1	17786 28 0
28	85	35	67	3,300	5	1	17786 48 0

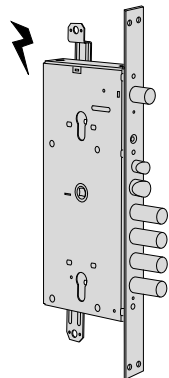


- **VERSION WITH SERVICE LOCK**
- 2 throw secondary cylinder lock
- 2 throw main cylinder lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0

28	85	35	67	3,800	1	1	16786 28 0
28	85	35	67	3,500	5	1	16786 48 0

- **VERSION WITH SERVICE LOCK**
- 2-throw secondary cylinder lock
- 2-throw main cylinder lock
- **FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)**
- Electrically controlled dead locking latch
- Slide item 1.06224.50.0


28	85	35	67	3,800	1	1	16786 28 B
28	85	35	67	3,500	5	1	16786 48 B

Type	Description	Key item	DEAD-BOLTS								ITEM							
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bitted 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • Electric operation self locking latchbolt • Slide item 1.06224.50.0 			28	85	35	67	3,735	1	1	17986	28	A					
		3 art. 1 00162 00 1		28	85	35	67	3,700	5	1	17986	48	A					
		1 art. 1 00120 00 1 construction key																
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws 			28	85	35	67	3,800	1	1	56735	28	0					
		3 art. 1 00122 00 1		28	85	35	67	3,500	5	1	56735	48	0					
		3 art. 1 00122 00 1																
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 			28	85	35	67	3,800	1	1	56735	28	B					
		3 art. 1 00122 00 1		28	85	35	67	3,500	5	1	56735	48	B					
		3 art. 1 00122 00 1																
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Double bitted 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws 			28	85	35	67	3,800	1	1	56736	28	0					
		3 art. 1 00122 00 1		28	85	35	67	3,500	5	1	56736	48	0					
		3 art. 1 00122 00 1																
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 			28	85	35	67	3,800	1	1	56736	28	B					
		3 art. 1 00122 00 1		28	85	35	67	3,500	5	1	56736	48	B					
		3 art. 1 00122 00 1																

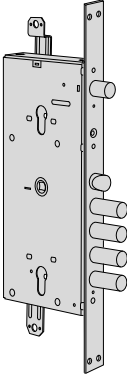Type	Description	Key item	DEAD-BOLTS							ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws 		28	85	35	67	3,600	1	1	56785	28	0	
			28	85	35	67	3,300	5	1	56785	48	0	
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		28	85	35	67	3,600	1	1	56785	28	B	
			28	85	35	67	3,300	5	1	56785	48	B	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • 2 throw main cylinder lock 		28	85	35	67	3,600	1	1	56786	28	0	
			28	85	35	67	3,300	5	1	56786	48	0	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		28	85	35	67	3,600	1	1	56786	28	B	
			28	85	35	67	3,300	5	1	56786	48	B	

Type	Description	Key item	DEAD-BOLTS							ITEM						
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		28	85	35	67	3,600	1	1	56787 28 0						
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		28	85	35	67	3,600	1	1	56787 28 B						
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	28	85	35	67	3,400	1	1	56788 28 0							
		28	85	35	67	3,400	5	1	56788 48 0							
<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	28	85	35	67	3,400	1	1	56788 28 B								
	28	85	35	67	3,400	5	1	56788 48 B								

Type	Description	Key item	DEAD-BOLTS							ITEM				
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.



- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws

28	85	35	67	3,600	1	1	B6784	28	0
38	85	35	67	3,600	1	1	B6784	38	0
28	85	35	67	3,300	5	1	B6784	48	0
38	85	35	67	3,300	5	1	B6784	58	0

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws


28	85	35	67	3,600	1	1	B6785	28	0
38	85	35	67	3,600	1	1	B6785	38	0
28	85	35	67	3,300	5	1	B6785	48	0
38	85	35	67	3,300	5	1	B6785	58	0

- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- 2 throw main cylinder lock


28	85	35	67	3,600	1	1	B6786	28	0
38	85	35	67	3,600	1	1	B6786	38	0
28	85	35	67	3,300	5	1	B6786	48	0
38	85	35	67	3,300	5	1	B6786	58	0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws
- FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)

28	85	35	67	3,600	1	1	B6786	28	B
38	85	35	67	3,600	1	1	B6786	38	B
28	85	35	67	3,300	5	1	B6786	48	B
38	85	35	67	3,300	5	1	B6786	58	B




- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




28	85	35	67	3,600	1	1	57785	28	0
28	85	35	67	3,300	5	1	57785	48	0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




28	85	35	67	3,600	1	1	57786	28	0
28	85	35	67	3,300	5	1	57786	48	0

Type	Description	Key item	DEAD-BOLTS							ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand




- VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws
- TO ORDER SEPARATELY:
Limiting device chain item 1.06421.10.1/2



3 art. 1 00122 00 1

28	85	35	67	3,300	5	1	57787 48 0
----	----	----	----	-------	---	---	-------------------


- VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY
- Secondary thumb turn lock, 2 throws
- Double bit 6 lever main lock, 4 throws
- TO ORDER SEPARATELY:
Limiting device chain item 1.06421.10.1/2




3 art. 1 00122 00 1

28	85	35	67	3,600	1	1	57788 28 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	57788 48 0
----	----	----	----	-------	---	---	-------------------



- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3 Art. 1 00123 00 1


28	85	35	67	3,600	1	1	B7784 28 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,600	1	1	B7784 38 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	B7784 48 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,300	5	1	B7784 58 0
----	----	----	----	-------	---	---	-------------------

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3 Art. 1 00123 00 1


28	85	35	67	3,600	1	1	B7785 28 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,600	1	1	B7785 38 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	B7785 48 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,300	5	1	B7785 58 0
----	----	----	----	-------	---	---	-------------------

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3 Art. 1 00123 00 1

28	85	35	67	3,600	1	1	B7786 28 0
----	----	----	----	-------	---	---	-------------------


38	85	35	67	3,600	1	1	B7786 38 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	B7786 48 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,300	5	1	B7786 58 0
----	----	----	----	-------	---	---	-------------------

Type	Description	Key item	DEAD-BOLTS							ITEM					
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	4,000	1	1	57985	28	A			
			28	85	35	67	3,800	1	1	57986	28	A			
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	3,800	1	1	57986	28	A			
			28	85	35	67	3,500	5	1	57986	48	A			
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	4,000	1	1	57987	28	A			
			28	85	35	67	3,700	5	1	57987	48	A			
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	3,700	5	1	57988	48	A			

Type	Description	Key item	DEAD-BOLTS							ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	Type	Dim.	Hand



- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws, NEW CAMBIO FACILE, with construction key

	28	85	35	67	4,000	1	1	B7984 28 A
	38	85	35	67	4,000	1	1	B7984 38 A
3 art. 1 00164 00 1	28	85	35	67	3,700	5	1	B7984 48 A
	38	85	35	67	3,700	5	1	B7984 58 A
1 art. 1 00120 00 1 construction key								

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key

	28	85	35	67	4,000	1	1	B7985 28 A
	38	85	35	67	4,000	1	1	B7985 38 A
3 art. 1 00164 00 1	28	85	35	67	3,700	5	1	B7985 48 A
	38	85	35	67	3,700	5	1	B7985 58 A
1 art. 1 00120 00 1 construction key								

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key

	38	85	35	67	3,800	1	1	B7986 38 A
	28	85	35	67	3,700	5	1	B7986 48 A
3 art. 1 00164 00 1	38	85	35	67	3,700	5	1	B7986 58 A
1 art. 1 00120 00 1 construction key								



Technical features:

- Electric case operating voltage 12V ac.
- ZAL stainless alloy casing and long lip.
- Satin finished stainless steel interchangeable faceplates for installation with locks having 28 and 38 mm center distances (to be ordered separately)

Supplied as standard:

- Screws for faceplate fixing

Hand:

0 = Non-handed

1 = R.H. inwards

L.H. outwards


2 = L.H. inwards

R.H. outwards

Cylinder to be ordered separately




Type	Description	Faceplate	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.



- Electric striker casing
- Voltage 12 V ac CE - current absorption 0,7A
- Hold open catch mechanism
- Hold open device

0,285	12	1	15300 00 1				
0,285	12	1	15300 00 2				

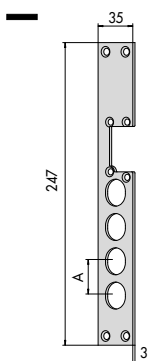






- Satin finished stainless steel faceplate
- To install with locks with deadbolt distance A=28 mm

34	0,042	12	1 05030 00 0				
----	-------	----	--------------	--	--	--	--

- Satin finished stainless steel faceplate
- To install with locks with deadbolt distance A=38 mm

34	0,042	12	1 05031 00 0				
----	-------	----	--------------	--	--	--	--

Type	Description	 Unit weight  Pieces	ITEM					
			Type	Dim.	Hand	Fin. Pers. Spec.		
	<ul style="list-style-type: none"> • 2 keys item 1.00100.00.1 • Key removal with open or closed lock • 1 locking point 	0,770	1	1	57410	30	1	
		0,770	1	1	57410	30	2	
	<ul style="list-style-type: none"> • 2 keys item 1.00100.00.1 • Key removal with closed lock • 1 locking point 	0,400	1	1	57410	35	1	
		0,400	1	1	57410	35	2	
		<ul style="list-style-type: none"> • 2 keys item 1.00100.00.1 • Key removal with open or closed lock • Pre-arranged for additional locking points 	0,450	1	1	57415	30	1
			0,930	1	1	57415	35	1
<ul style="list-style-type: none"> • 2 keys item 1.00100.00.1 • Key removal with closed lock • Pre-arranged for additional locking points 		0,930	1	1	57415	35	2	
		0,930	1	1	57415	35	2	



Technical features:

- 11-pin bitting.
- Pins
- Wear resistant bronze
- Hardened steel pins in first position.
- Drivers
- Brass
- Hardened steel driver in first position
- Phosphor bronze springs
- Hardened steel gate

Operation:

- The key rotation activates/open a window which allows key introduction

Supplied as standard:

- Fixing screws.
- Instruction sheet
- Keys bitted on stem only
- Keys bitted on stem and bits (for New Cambio facile locks)


On request:

- Hardened steel protective rose for double bit key cylinder.

Finishes:

- Standard:
 - polished brass fin. 00
- On request:
 - polished chrome fin. 18
 - gun barrel fin. 46

Type	Description	For series/item	L	Kg Unit weight	Pcs Pieces	ITEM			
						Type	Dim. Hand	Fin.	Pers. Spec.



- May be combined with 6 lever double bit key locks, for armoured doors
- Bitted keys only on stem
- For lock combination , bit the key by duplicating main key
- SUPPLIED AS STANDARD:
3 keys item 1.00162.00.1


53,0 0,580 1 1 02715 10 1

- May be combined with 6 lever double bit key locks, for armoured doors
- Bitted keys only on stem
- For lock combination , bit the key by duplicating main key
- SUPPLIED AS STANDARD:
3 keys item 1.00163.00.1

70,0 0,605 1 1 02715 11 1


Type	Description	For series/item	 L Unit weight Pieces		ITEM					
			Type	Dim.	Hand	Fin.	Pers.	Spec.		
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00162.00.1 		53,0	0,350	1	1	02716 00 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00162.00.1 		53,0	0,840	1	1	02716 01 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00163.00.1 		70,0	0,350	1	1	02716 10 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00163.00.1 		70,0	0,400	1	1	02716 11 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00162.00.1 		53,0	0,665	1	1	02716 50 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00162.00.1 		53,0	0,820	1	1	02716 51 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00163.00.1 		70,0	0,350	1	1	02716 60 1			
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00163.00.1 		70,0	0,833	1	1	02716 61 1			

Type	Description	For series/item	L	Unit weight Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.




• Nickel-plated steel screws

06460, 06461, 105,0 0,020 25 1 06047 51 0
06480, 06485

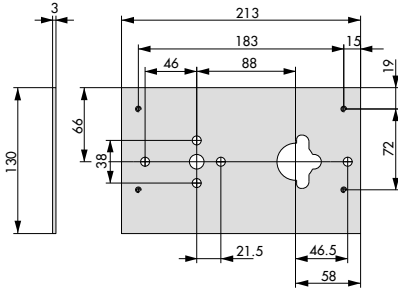


• Steel welding plate

57000 0,660 12 1 06429 00 0

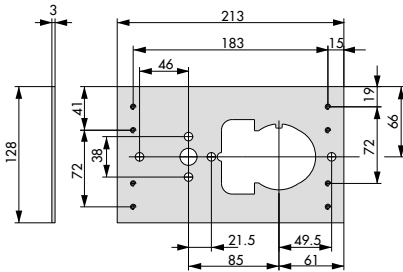


• Steel welding plate

56000, 57000 0,552 12 1 06429 05 0

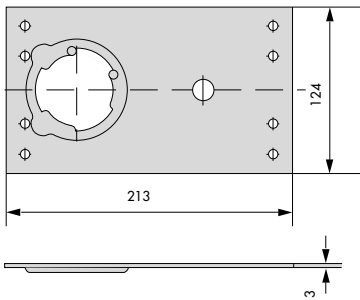


• Steel welding plate for assembly of protection roses series 06485

15000, 56000 0,552 12 1 06429 06 0



• Steel welding plate

86515, 87515 0,650 12 1 06429 10 0



• Steel welding plate
• For double hole locks

56700, 57700, 57900 0,695 12 1 06429 15 0

Type	Description	For series/item	L	Unit weight	Pieces	ITEM					
						Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> Steel welding plate for assembly of protection roses series 06485 	56765, 56766, 56767, 56768, 56785, 56786, 56787, 56788		0,950	12	1	06429	16	0		
	<ul style="list-style-type: none"> Steel welding plate for assembly of protection roses series 06485 	56715, 56716, 56735, 56736		0,950	12	1	06429	18	0		
	<ul style="list-style-type: none"> Steel welding plate for assembly of protection roses series 06485 	57765, 57766, 57785, 57786, 57787, 57915, 57916, 57917, 57935, 57936, 57937, 57965, 57966, 57967, 57985, 57986, 57987		0,950	12	1	06429	20	0		
	<ul style="list-style-type: none"> Manganese steel anti-drill protection For double bit key locks May be combined with welding plates 	1 06429 05 0, 1 06429 10 0, 1 06429 15 0, 1 06429 18 0, 1 06429 20 0		0,075	12	1	06429	50	0		
	<ul style="list-style-type: none"> Manganese steel anti-drill protection May be combined with welding plates 	1 06429 05 0, 1 06429 10 0, 1 06429 15 0, 1 06429 18 0, 1 06429 20 0		0,075	12	1	06429	51	0		
	<ul style="list-style-type: none"> Carbonitrided steel protection rose for bit key cylinder series 02715 and 02716 May be combined with 6 lever and NEW CAMBIO FACILE locks Use assembly plate item 1.06429.05.0 or 1.06429.50.0 SUPPLIED AS STANDARD: Hardened steel hole protection plate Plate ring AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Satin finished nickel plated chrome (fin. B1) 			0,280	1	1	06429	60	1		

Type	Description	For series/item	L	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Polished brass internal rose to be combined with European profile cylinders on locks series 15000, 56000 AVAILABLE FINISHES: Anodized dark brown (fin. 58) Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) 			0,036	12	1	06458	10	0	
	<ul style="list-style-type: none"> Polished brass internal rose to be combined with European profile cylinders with adjustable knob on locks series 15000, 56000 AVAILABLE FINISHES: Anodized dark brown (fin. 58) Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) Polished chrome (fin. 18) 	0A317, 0H3S7, 0L3S7, 0M317		0,037	12	1	06458	20	0	
	<ul style="list-style-type: none"> Carbonitrided steel protection rose with polished brass finish 2 screws L. 45 mm. (M6) AVAILABLE FINISHES: Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) Polished chrome (fin. 18) 	0A310, 0H3S0, 0L3S1, 0M311	45,0	0,200	1	1	06460	40	0	
	<ul style="list-style-type: none"> Carbonitrided steel protection rose with polished brass finish 2 screws (M6) AVAILABLE FINISHES: Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) Polished chrome (fin. 18) 	0A310, 0H3S0, 0L3S1, 0M311	70,0	0,310	1	1	06460	50	0	
		0A310, 0H3S0, 0L3S1, 0M311	110,0	0,320	1	1	06460	51	0	
		08815	70,0	0,310	1	1	06460	60	0	
		0A317, 0H3S7, 0L3S7, 0M317	70,0	0,335	1	1	06461	50	0	
		0A317, 0H3S7, 0L3S7, 0M317	110,0	0,325	1	1	06461	51	0	
		08887	70,0	0,200	1	1	06461	60	0	
		08887	110,0	0,325	1	1	06461	61	0	
	<ul style="list-style-type: none"> Carbonitrided steel rotor protection for roses series 06460 and 06461 	0A310, 0H3S0, 0L3S1, 0M311		0,009	50	1	06466	01	0	
		08815		0,008	50	1	06466	02	0	

Type	Description	For series/item	 L Unit weight Pieces			ITEM			
			Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • Carbonitrided steel protective rose-casing • 2 L 45 mm screws (M6) • To order separately: -rose cap -cover plate ring 	0A310,0H350, OL3S1, 0M311	16,0	0,285	6	1	06480	00	0
		0A310,0H350, OL3S1, 0M311	24,5	0,385	6	1	06480	01	0
		0A310,0H350, OL3S1, 0M311	34,5	0,594	6	1	06480	02	0
		0A310,0H350, OL3S1, 0M311	16,0	0,365	30	1	06480	20	0
		0A310,0H350, OL3S1, 0M311	24,5	0,482	30	1	06480	21	0
		0A310,0H350, OL3S1, 0M311	34,5	0,594	30	1	06480	22	0
		08815	16,0	0,365	6	1	06480	10	0
		0A310,0H350, OL3S1, 0M311	24,5	0,482	6	1	06480	11	0
		08815	34,5	0,594	6	1	06480	12	0
			<ul style="list-style-type: none"> • Carbonitrided steel protective rose-casing with quick coupling • 2 screws L 45 mm 	0A310,0H350, OL3S1, 0M311	16,0	0,378	6	1	06485
0A310,0H350, OL3S1, 0M311	24,5			0,482	6	1	06485	01	0
0A310,0H350, OL3S1, 0M311	34,5			0,594	6	1	06485	02	0
0A310,0H350, OL3S1, 0M311	16,0			0,378	30	1	06485	20	0
0A310,0H350, OL3S1, 0M311	24,5			0,482	30	1	06485	21	0
0A310,0H350, OL3S1, 0M311	34,5			0,594	30	1	06485	22	0
0A310,0H350, OL3S1, 0M311	16,0			0,378	30	1	06485	20	0
	<ul style="list-style-type: none"> • Protective rose-casing cap • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodized bronze (fin. 64) Light anodized bronze (fin. 65) Satin finished nickel plated chrome (Fin B1) 	06480, 06485	16,0	0,025	6	1	06483	00	0
		06480, 06485	16,0	0,025	30	1	06483	20	0
	<ul style="list-style-type: none"> • Cover plate ring for protective rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodized bronze (fin. 64) Light anodized bronze (fin. 65) Satin finished nickel plated chrome (fin. B1) 	06480, 06485		0,025	6	1	06483	60	0
		06480, 06485		0,025	30	1	06483	80	0
	<ul style="list-style-type: none"> • Cover plate ring for protective rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodized bronze (fin. 64) Light anodized bronze (fin. 65) Satin finished nickel plated chrome (fin. B1) 	06480, 06485		0,025	30	1	06483	61	0
		06480, 06485	16,0	0,025	30	1	06483	81	0

Type	Description	For series/item	L	Unit weight 	Pieces 	ITEM				
						Type	Dim.	Hand	Fin.	Peris.
	<ul style="list-style-type: none"> Carbonitrided steel rotor, polished chrome, to be combined with roses series 06475, 06476 	0A310, 0H350, 0L351, 0M311, 06470		0,016	50	1	06472	00	0	
		0A310, 0H350, 0L351, 0M311, 06470		0,016	50	1	06472	10	0	
	<ul style="list-style-type: none"> Zinc plated 2 mm. spacer for protection roses 	06480		0,025	25	1	06472	40	0	
	<ul style="list-style-type: none"> Pair of zinc plated anti-crush plates 	06480, 06485		0,025	25	1	06472	50	0	
	<ul style="list-style-type: none"> Pair of zinc plated anti-crush plates 	06480, 06485		0,050	25	1	06472	51	0	
	<ul style="list-style-type: none"> Internal rose AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodized dark bronze (fin. 64) Anodized light bronze (fin. 65) Satin finished nickel plated chrome (fin. B1) 	06460, 06461, 06480, 06485		0,116	12	1	06473	00	0	
	<ul style="list-style-type: none"> Internal rose for cylinder series 0A317 and 0B317 AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodized light bronze (fin. 65) Anodized dark bronze (fin. 64) Satin finished nickel plated chrome (fin. B1) 	06460, 06461, 06480, 06485		0,120	12	1	06473	10	0	
	<ul style="list-style-type: none"> External ring for plate AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodized dark bronze (fin. 64) Anodized light bronze (fin. 65) Satin finished nickel plated chrome (fin. B1) 	1 06429 60 1		0,025	25	1	06473	50	0	

Type	Description	For series/item	L	Unit weight	Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> External ring for plate AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodized dark bronze (fin. 64) Anodized light bronze (fin. 65) Satin finished nickel plated chrome (fin. B1) 	1 06429 60 1		0,025		25	1	06473	51	0	
	<ul style="list-style-type: none"> Carbonitrided steel protective rose SUPPLIED AS STANDARD: Rose body Cap Cover plate ring screws M6 x 45 mm AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome-plated (fin. 18) Gunbarrel grey (fin. 46) Anodized dark bronze (fin. 64) Anodized light bronze (fin. 65) Satin finished nickel plated chrome (fin. B1) 			16,0	0,365	6	1	06490	00	0	
				24,5	0,482	6	1	06490	01	0	
				34,5	0,594	6	1	06490	02	0	
	<ul style="list-style-type: none"> CONE-SHAPED PROTECTIVE ROSE Carbonitrided steel protective rose casing 2 screws L. 45 mm. (M6) Rose cap Inner escutcheon AVAILABLE FINISHES: Satin nickel-plated chrome (fin. B1) Dark anodized bronze (fin. 64) Polished chrome (fin. 18) 			13,0	0,285	1	1	06490	50	0	
				18,0	0,385	1	1	06490	51	0	
				22,0	0,594	1	1	06490	52	0	
				25,0	0,365	1	1	06490	53	0	
	<ul style="list-style-type: none"> CONE-SHAPED PROTECTIVE ROSE Carbonitrided steel protective rose casing 2 screws L. 45 mm. Rose cap Cover plate ring AVAILABLE FINISHES: Satin nickel-plated chrome (fin. B1) Dark anodized bronze (fin. 64) Polished chrome (fin. 18) 			25,0	0,378	6	1	06490	10	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Polished brass internal hole cover For double bit key locks 		0,029 12	1	06081	01	0
	<ul style="list-style-type: none"> Polished brass key guide For double bit key locks 		0,041 5	1	06123	04	0
	<ul style="list-style-type: none"> Nylon key guide supplied with 7 spacers For double bit key locks 		0,050 1	1	06142	01	0
	<ul style="list-style-type: none"> Key guide with nylon flange supplied with twelve spacers 	1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,061 1	1	06142	02	0
	<ul style="list-style-type: none"> Polished brass rose with key guide For double bitted locks AVAILABLE FINISHES: Polished chrome (fin.18) Anodized light bronze (fin.65) Anodized dark bronze (fin.64) Satin finished nickel plated chrome (fin. B1) 		0,105 6	1	06144	10	1
	<ul style="list-style-type: none"> Nylon key guide, including 2 supports for escutcheon and 3 spacers For double bit key locks 		0,066 6	1	06144	15	0
	<ul style="list-style-type: none"> Polished brass cover for escutcheon and key guide AVAILABLE FINISHES: Polished chrome (fin.18) Anodized light bronze (fin.65) Anodized dark bronze (fin.64) Satin finished nickel plated chrome (fin. B1) 	1 06144 10 1, 1 06144 15 0	0,030 50	1	06144	50	1


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Polished brass escutcheon with key guide For double bit key locks AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodized light bronze (fin.65) Anodized dark bronze (fin.64) 		0,135	6	1	06145	10	0	
	<ul style="list-style-type: none"> Polished brass escutcheon with key guide For double bit key locks AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodized light bronze (fin.65) Anodized dark bronze (fin.64) 		0,130	6	1	06145	11	0	
	<ul style="list-style-type: none"> Key guide escutcheon-nylon key complete with support for escutcheon and 3 spacers For double bitted locks 		0,135	6	1	06145	15	0	
	<ul style="list-style-type: none"> Set of brass cover for escutcheon item 1.06145.00.0 AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodized light bronze (fin.65) Anodized dark bronze (fin.64) Satin finished nickel plated chrome (fin. B1) 	1 06145 10 0, 1 06145 15 0	0,071	6	1	06145	50	0	
	<ul style="list-style-type: none"> Zinc plated high resistant steel flat striker For 28 mm.dead-bolt locks distance 		0,132	6	1	06220	00	0	
	<ul style="list-style-type: none"> Zinc plated high resistant steel flat striker For 28 mm.dead-bolt locks distance 		0,250	6	1	06220	02	0	
	<ul style="list-style-type: none"> Zinc plated high resistant steel flat striker 	1 06433 00 0, 1 06434 00 0, 1 06437 00 0	0,169	6	1	06220	03	0	
	<ul style="list-style-type: none"> Zinc plated high resistant steel flat striker For double hole locks 		0,220	6	1	06220	05	0	

Type	Description	For series/item	Unit weight Kg	Pieces 	ITEM			
					Type	Dim.	Hand	Fitt.
	<ul style="list-style-type: none"> • Zinc plated high resistant steel flat striker • For electric locks 	15510, 15515, 15530, 15535, 17510, 17515, 17530, 17535	0,132	6	1	06220	20	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel striker plate • For panic function locks with deadbolt distance of 28 mm 	56900	0,250	6	1	06220	26	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel striker plate • For panic function locks with deadbolt distance of 38 mm 	56900	0,250	6	1	06220	27	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel striker plate • For 1 deadbolt diverting devices 	06433	0,169	6	1	06220	28	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel striker plate • For 2 deadbolt diverting devices 	06433	0,169	6	1	06220	29	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel faceplate • 28 mm. dead-bolt distance 	57500	0,297	6	1	06221	00	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel faceplate • 28 mm. dead-bolt distance 	56500	0,300	6	1	06221	01	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel faceplate • 28 mm. dead-bolt distance 	17500	0,275	6	1	06221	10	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel faceplate • 28 mm. dead-bolt distance 	15500	0,295	6	1	06221	11	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel faceplate • 28 mm. dead-bolt distance 	1 87515 28 0	0,297	6	1	06221	15	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	1 B6515 28 0	0,297	6	1	06221	16	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 38 mm. dead-bolt distance 	1 B6515 38 0	0,297	6	1	06221	17	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	B7665	0,297	6	1	06221	18	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	56835, 57815	0,297	6	1	06221	20	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	57715, 57716, 57735, 57736	0,380	6	1	06221	50	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	56765, 56766, 56785, 56786	0,380	6	1	06221	51	0
	<ul style="list-style-type: none"> Zinc plated high resistance steel faceplate 28 mm. dead-bolt distance 	57915, 57965	0,380	6	1	06221	52	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	B6764, B6765, B6766	0,380	6	1	06221	60	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 38 mm. dead-bolt distance 	B6764, B6765, B6766	0,380	6	1	06221	61	0
	<ul style="list-style-type: none"> Zinc plated high resistant steel faceplate 28 mm. dead-bolt distance 	B7964, B7965, B7966	0,380	6	1	06221	62	0


Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fitt.
	<ul style="list-style-type: none"> • Nylon slide 	15000, 17000	0,003 6	1	06224	50	0
	<ul style="list-style-type: none"> • Bush for latchbolt guide • For electrical locks 		0,003 6	1	06224	60	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel cover plate • For electric locks with 28 mm. dead-bolt distance 		0,023 6	1	06228	08	0
	<ul style="list-style-type: none"> • Zinc plated high resistant steel cover plate • For 28 mm. dead-bolt distance 		0,024 25	1	06228	28	0
	<ul style="list-style-type: none"> • Steel spring rod for floor bolt item 1.06425.00.0 	1 06425 00 0	0,221 12	1	06291	50	0
	<ul style="list-style-type: none"> • Pair of zinc plated high resistant steel diverting devices • For mortice locks 		0,128 6	1	06418	01	0
	<ul style="list-style-type: none"> • Pair of zinc plated high resistant steel diverting devices • For mortice locks 		0,047 6	1	06418	03	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.




- Opening limiting device chain
- For double hole locks with opening limiting device

0,066	6	1	06421	10	1
0,066	6	1	06421	10	2




- Set of zinc plated extended bolts
- For rim locks pre-arranged for additional locking points

1,500	1	1	06425	02	0
-------	---	---	-------	----	---



- Set of zinc plated extended bolts
- For mortice locks pre-arranged for additional locking points

1,435	1	1	06425	03	0
-------	---	---	-------	----	---




- Set of zinc plated steel connecting bars
- For rim locks pre-arranged for additional locking points

1,300	1	1	06425	04	0
-------	---	---	-------	----	---

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Top and bottom extended bolts for use with rekeyable locks (lower spring rod) • For rim locks pre-arranged for additional locking points 		1,610	1	1	06425 05 0	
	<ul style="list-style-type: none"> • Pair of bolts for diverter deadbolt control, galvanized steel • For rim locks pre-set for additional locking points 	56900	0,540	6	1	06425 06 0	
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • S = 3,5 mm. • For rim locks pre-arranged for additional locking points 		0,455	1	1	06433 00 0	
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • S = 43,5 mm. • For rim locks pre-arranged for additional locking points 		0,510	1	1	06433 10 0	
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • S = 3,5 mm. • For rim locks pre-arranged for additional locking points 		0,855	1	1	06433 01 0	
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • S = 43,5 mm. • For rim locks pre-arranged for additional locking points 		0,990	1	1	06433 11 0	
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • For mortice locks pre-arranged for additional locking points 		0,646	1	1	06434 00 0	


Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • For mortice locks pre-arranged for additional locking points 		0,900	1	1	06434	01	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • For rim locks pre-arranged for additional locking points 		0,448	1	1	06437	00	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • For rim locks pre-arranged for additional locking points 		0,789	1	1	06437	01	0
	<ul style="list-style-type: none"> • Pair of nylon electric contacts 	15000, 17000	0,029	6	1	06510	10	0
	<ul style="list-style-type: none"> • Concealed cable guard with spring 	15000, 17000	0,058	6	1	06515	00	0
	<ul style="list-style-type: none"> • Concealed cable guard with spring 		0,325	6	1	06515	15	0
	<ul style="list-style-type: none"> • Battery (lead) 12V 2.3 ah • For CISA e-Volution locks 		0,492	1	1	06740	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.




- Pair of handles to install with Exit lock
- AVAILABLE FINISHES:
Anodized bronze (fin. 00)
Satin finished nickel plated chrome (fin. B1)

56915, 56935 0,400 1 1 07070 50 0




- Handle and fixed thumb turn to install with Exit lock
- AVAILABLE FINISHES:
Anodized bronze (fin. 00)
Satin finished nickel plated chrome (fin. B1)


56916, 56917, 56936, 56937 0,400 1 1 07070 60 0

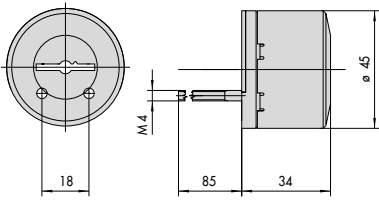

02715, 02716

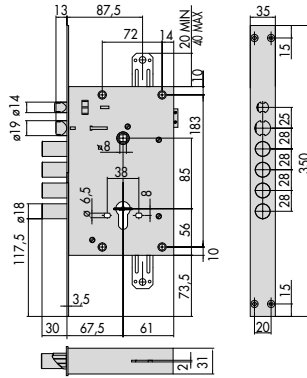

15530, 17530, 15535, 17535,
17635, 17685, E6535




56500, 57500, 57501, 57502, 56505,
57505, 57506, 57507, 57605, 57655, 67505

A = 25 - 27 - 28 - 32 - 38


1

4


7

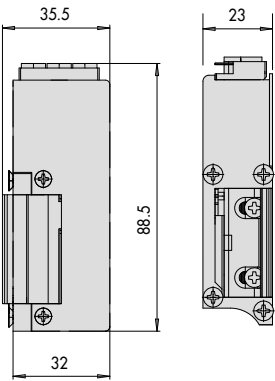

15300

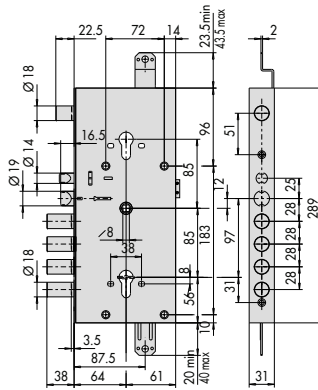

16766, 17766, 17916, 17966




56510, 56515, 56815, 56916, 56917, 57510,
57511, 57512, 57515, 57516, 57517, 57518,
57615, 57665

A = 25 - 27 - 28 - 32 - 38

2


5

8




15510, 17510, 15515, 17515,
17615, 17665, E6515, E6615

A = 25 - 27 - 28 - 32 - 38

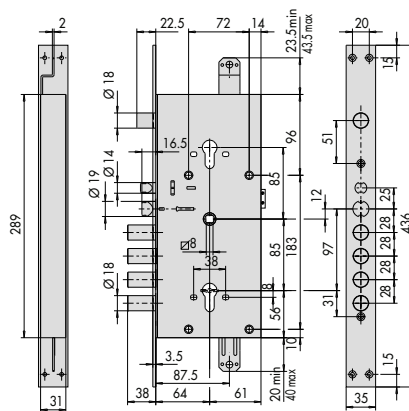

16786, 17786, 17936, 17986



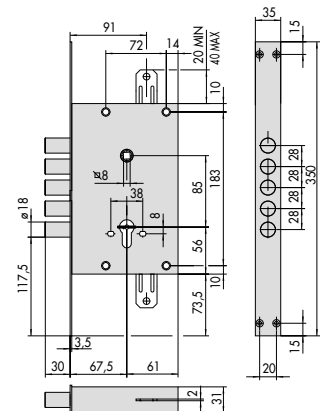


56520, 57520, 57521, 56525,
57525, 57526, 57625, 57675,

3

6

9

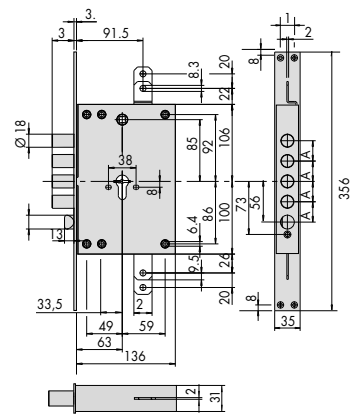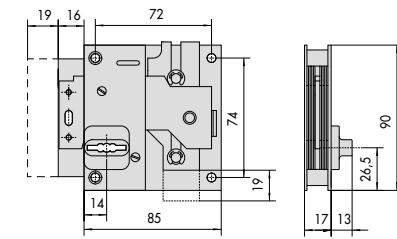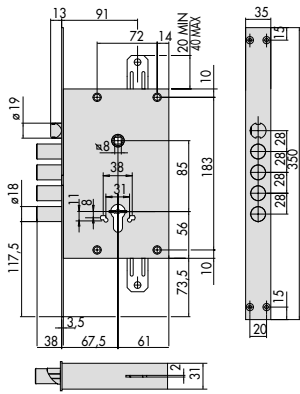

56530, 56535, 56835, 56936, 56937, 57530, 57531, 57535, 57536, 57635, 57685




1.57410.30

B6525, B6535, B7525, B7535
B7675, B7685
A = 25-28-38

10

13

16

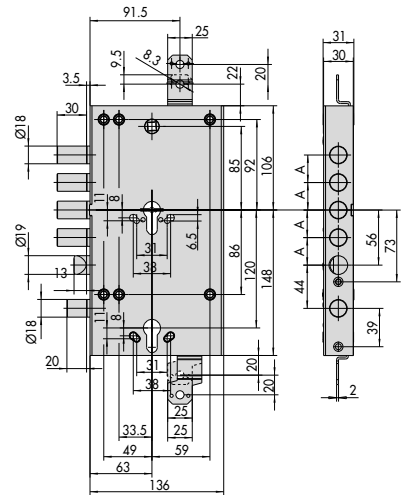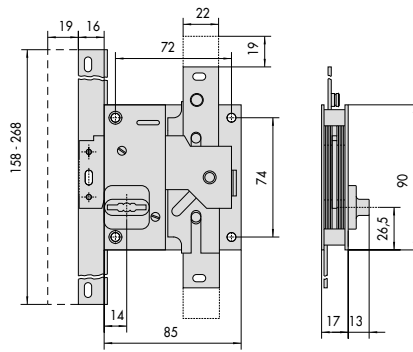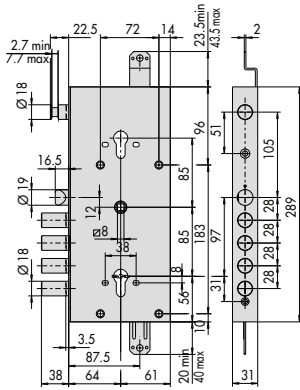

56715, 56716, 56765, 56766, 56767, 56768, 57765, 57766, 57767, 57768, 57915, 57916, 57917, 57918, 57965, 57966, 57967, 57968




1.57415.30,

B6764, B6765, B6766, B7764, B7765, B7766
B7964, B7965, B7966
A = 28-38

11

14

17

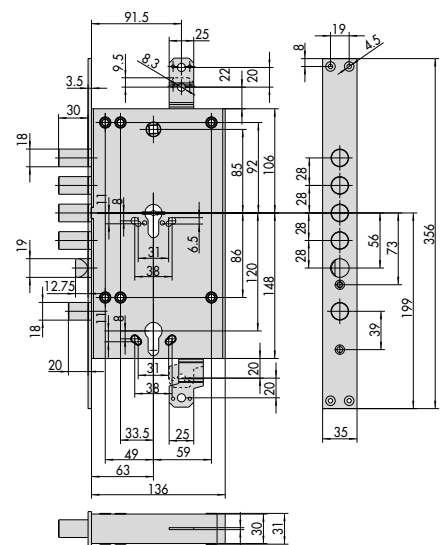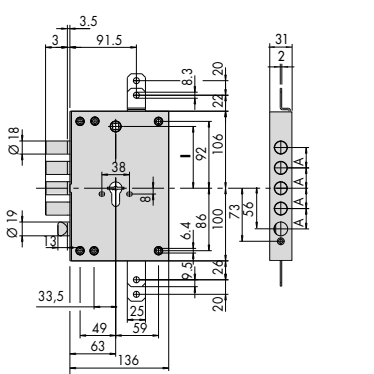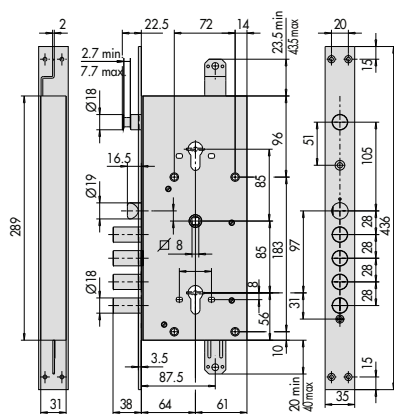

56735, 56736, 56785, 56786, 56787, 56788, 57785, 57786, 57787, 57788, 57935, 57936, 57937, 57938, 57985, 57986, 57987, 57988

B6505, B6515, B7505, B7515
B7655, B7665
l = 85, A = 25-28-38

B6615
l = 92, A = 25-28-38

B6784, B6785, B6786, B7784, B7785,
B7786, B7984, B7985, B7986
A = 28-38

12

15

18











Fire door locks and panic exit devices



Panic function mortice locks with split follower.....	406
Cylinder mortice locks.....	407
Panic function cylinder mortice locks	409
Cylinder mortice locks.....	412
Panic function cylinder mortice locks	413
Extended bolts for additional locking points	415
Panic exit devices with black painted case cover for panic function locks	416
Cisa Fast Push series panic exit devices for panic function mortice locks.....	417

Cisa Fast Touch series panic exit devices for panic function mortice locks	418
Cisa Prestige series panic exit devices for panic function mortice locks.....	419
Cisa Prestige INOX series panic exit devices for panic function mortice locks	420
Electric handles.....	421
Horizontal bars for panic exit devices.....	422
Accessories for fire door locks.....	423
Dimensional drawings	428

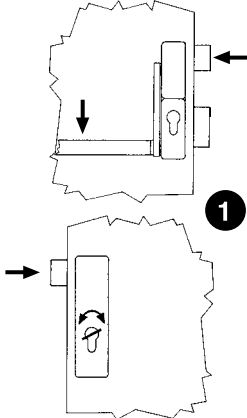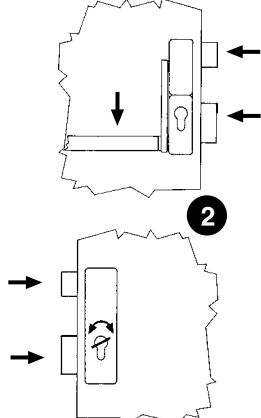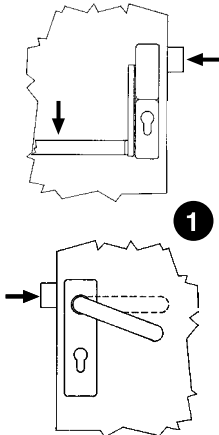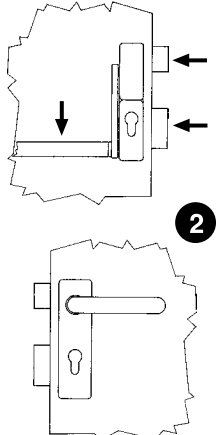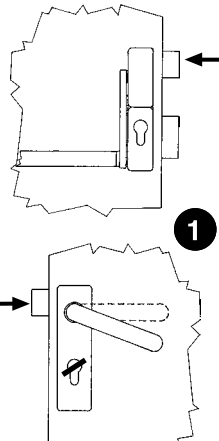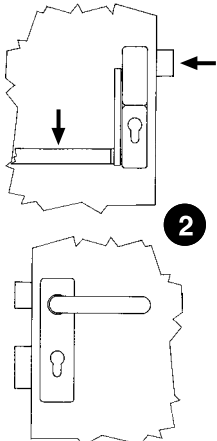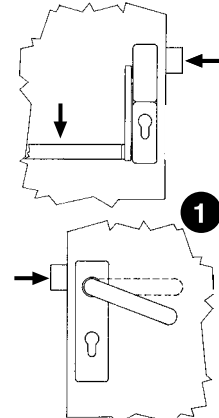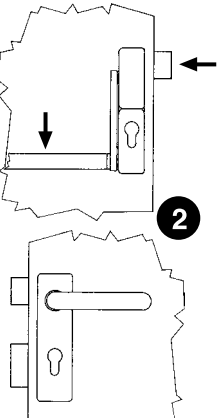

TYPE	CONTROLS	OPERATION	
<p>A</p> <p>OUTSIDE ENTRANCE BY KEY</p> <p>For doors which have to be opened with the key from the outside by authorized personnel only</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with dead-bolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates latch and deadbolt. 	 <p>1 Outside entrance by key only.</p>	 <p>2</p> <p>Locking with the deadbolt, outside entrance is possible only with the use of the key.</p>
<p>B</p> <p>OUTSIDE HANDLE ACTIVATED OR DISACTIVATED</p> <p>For doors that open outwards and places where it is necessary to provide free entrance.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with dead-bolt and activate or deactivate the outside handle. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the dead-bolt and activates or deactivates the outside handle for latch operation. 	 <p>1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go (the handle remains activated when the key is removed).</p>	 <p>2</p> <p>Closing with the dead-bolt deactivates the outside handle; the latter remains deactivated even after the door has been opened with the panic exit device.</p>
<p>C</p> <p>OUTSIDE HANDLE AUTOMATICALLY DISACTIVATED</p> <p>For doors that must be opened from the outside only by authorized persons.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with dead-bolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the throw and activates the handle. 	 <p>1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go, after first withdrawing the dead-bolt.</p>	 <p>2</p> <p>Removing the key automatically deactivates the outside handle.</p>
<p>D</p> <p>OUTSIDE HANDLE ALWAYS ACTIVATED</p> <p>For doors that partition throughways (e.g. corridors).</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with dead-bolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the dead-bolt. The handle, with the dead-bolt withdrawn, engages for latch operation. 	 <p>1 The outside handle is always activated when the dead-bolt is withdrawn.</p>	 <p>2</p> <p>Entry is after using the panic exit device, always possible from the outside as long as the dead-bolt is not activated by the key.</p>



Technical features:

- Zinc plated steel faceplate
- Zinc plated steel case
- Zinc plated steel latch
- 9 mm. through follower

Hand:


0 = Non-handed

Cylinder to be ordered separately




Mito

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- Latch only
- 12 V dc - 800 mA
- OPERATION:
Inside: with the handle or the key
Outside: with the electrically operated handle and/or the key

72	24	65	0,980	1	1	13100 65 0
----	----	----	-------	---	---	------------




- Latch bolt only
- OPERATION:
Latch withdrawn by key or handle

72	24	65	0,690	24	1	43000 65 0
----	----	----	-------	----	---	------------



- Dead-bolt and latch
- 15 mm. throw
- OPERATION:
Latch withdrawn by key or handle
Dead-bolt withdrawn by key


1	72	24	65	0,746	24	1	43020 65 0
---	----	----	----	-------	----	---	------------



- Dead-bolt and latch
- 15 mm. throw
- Pre-arranged for additional locking points
- OPERATION:
Latch withdrawn by key or handle
Dead-bolt operated by key
- ON REQUEST:
Set of side latches item 1.07090.50.0
Set of rods item 1.07091.50.0


1	72	24	65	0,850	24	1	43024 65 0
---	----	----	----	-------	----	---	------------

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Dead-bolt and latch
- 15 mm throw
- 3 locking points
- OPERATION:
Latch withdrawn by key or handle
Dead-bolt operated by key

1	72	24	65	1,750	24	1	43025	65	0
---	----	----	----	-------	----	---	-------	----	---



- FOR SECONDARY LEAF OF A DOUBLE DOOR
- OPERATION:
Extended bolts are operated by a front lever located inside the striker
- Rod's forward stroke 17 mm
- ON REQUEST:
Extended bolts item 1.07088.03.0
Automatic dogging device item 1.07089.50.0

1	24			0,360	1	1	43091	00	0
---	----	--	--	-------	---	---	-------	----	---



- Technical features:**
- Zinc plated steel faceplate
 - Zinc plated steel case
 - Zinc plated steel latch
 - 9 mm. split follower
 - Can be combined with the panic exit devices series 59600 and 59711.00.0.00.00.FR

Cylinder to be ordered separately




Hand:
0 = Non-handed

Mito Panic


Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Latch only • 12 V dc - 800 mA • OPERATION: Inside: with the handle or the key Outside: with the electrically operated handle and/or the key 	72	24	65	0,980	1	1	13110	65	0	
	<ul style="list-style-type: none"> • Latch only • 12 V dc - 800 mA • OPERATION: For pull panic doors 	72	24	65	0,980	1	1	13160	65	1	
	<ul style="list-style-type: none"> • Latch bolt only • OPERATION: Inside: panic exit device and/or key Outside: the key activates and deactivates handle and withdraws latch Handle withdraws latch only if activated by the key 	72	24	65	0,848	6	1	43110	65	0	
	<ul style="list-style-type: none"> • Dead-bolt and latch • 15 mm throw • OPERATION: Inside: panic exit device and/or key Outside: the key withdraws latch and dead-bolt 	1	72	24	65	0,853	6	1	43120	65	0
	<ul style="list-style-type: none"> • Dead-bolt and latch • 15 mm throw • OPERATION: Inside: panic exit device and/or key Outside: the key withdraws latch and dead-bolt, latch withdrawn by handle 	1	72	24	65	0,876	6	1	43130	65	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.




- Latch only
- Pre-arranged for additional locking points
- ON REQUEST:
Zinc plated extended bolts item 1.07091.50.0
Set of zinc plated side latches item 1.07090.50.0
- OPERATION:
Inside: panic exit device and/or key
Outside: the key activates and disactivates handle and withdraws latch
Handle withdraws latch only if activated by the key

72	24	65	0,850	6	1	43114	65	0
----	----	----	-------	---	---	-------	----	---



- Latches only
- 3 locking points
- OPERATION:
Inside: panic exit device and/or key
Outside: the key activates and disactivates handle and withdraws latches
Handle withdraws latches only if activated by the key


72	24	65	1,750	6	1	43115	65	0
----	----	----	-------	---	---	-------	----	---



- FOR SECONDARY LEAF OF A DOUBLE DOOR
- A latch only lock to be installed on main leaf, item 1.43110.65.0 or 1.43115.65.0
- Rod extension 17 mm
- OPERATION:
Inside: panic exit device
- ON REQUEST:
Extended bolts item 1.07088.03.0
Automatic dogging device 1.07089.50.0

1	24	65	0,858	1	1	43190	65	0
1	24	95	1,150	1	1	43190	95	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- FOR SECONDARY LEAF OF A DOUBLE DOOR
- DOUBLE FUNCTIONEMENT VERSION
- A latch only lock to be installed on main leaf, item 1.43110.65.0 or 1.43115.65.0
- Rod's forward stroke 17 mm
- OPERATION:
Inside:panic exit device
- ON REQUEST:
Extended bolts item 1.07088.03.0
Automatic dogging device 1.07089.50.0

1	24	65	0,858	1	1	43191 65 0				
1	24	95	1,000	1	1	43191 95 0				



Technical features:

- Zinc plated steel faceplate
- Zinc plated steel case
- Nickel-plated reversible steel latch with anti-picking device
- Single throw (15 mm.) nickel-plated dead-bolt
- 9 mm. through follower

Supplied as standard:

- Instruction sheet

Hand:


0 = Non-handed

Cylinder to be ordered separately



Sicur

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim. Hand	Fin.	Pers. Spec.



- Dead-bolt and latch
- OPERATION:
Outside and inside: latch and dead-bolt operated by key; latch withdrawn by handle

1	92	24	25	0,680	1	1	43520	25	0		
1	92	24	30	0,720	1	1	43520	30	0		
1	92	24	35	0,762	1	1	43520	35	0		
1	92	24	40	0,805	1	1	43520	40	0		
1	92	24	45	1,000	1	1	43520	45	0		

- Dead-bolt and latch
- OPERATION:
Outside and inside: the key operates the dead-bolt and activates or disactivates the handle for latch operation

1	92	24	25	0,680	1	1	43530	25	0		
1	92	24	30	0,720	1	1	43530	30	0		
1	92	24	35	0,775	1	1	43530	35	0		
1	92	24	40	0,805	1	1	43530	40	0		
1	92	24	45	1,000	1	1	43530	45	0		

TO BE DISCONTINUED



Technical features:

- Zinc plated steel faceplate
- Zinc plated steel case
- Nickel-plated reversible steel latch
- Single throw (15 mm.) nickel-plated dead-bolt
- 9 mm. split follower
- Can be combined with the panic exit devices series 59600 and 59711.10/11.0.00.00.FE

Hand:
0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Instruction sheet

Sicur Panic

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- FOR SINGLE LEAF DOORS
- Dead-locking latch and dead-bolt
- A TYPE OPERATION
- Inside:
Panic exit device for opening
Key for closing with dead-bolt
- Outside:
Key for activating latch and dead-bolt

1	92	24	25	0,610	1	1	43620	25	0		
1	92	24	30	0,655	1	1	43620	30	0		
1	92	24	35	0,800	1	1	43620	35	0		
1	92	24	40	0,730	1	1	43620	40	0		
1	92	24	45	0,780	1	1	43620	45	0		

- B TYPE OPERATION
- Inside:
Panic exit device for opening
Key for closing with dead-bolt and activating or disactivating external handle for latch operation
- Outside:
Key for closing with dead-bolt and activating or disactivating external handle for latch operation

1	92	24	25	0,610	1	1	43630	25	0		
1	92	24	30	0,655	1	1	43630	30	0		
1	92	24	35	0,690	1	1	43630	35	0		
1	92	24	40	0,730	1	1	43630	40	0		
1	92	24	45	0,780	1	1	43630	45	0		

- C TYPE OPERATION
- Inside:
Panic exit device for opening
Key for closing with dead-bolt and activating external handle for latch operation
- Outside:
Key for closing with dead-bolt and activating external handle for latch operation

1	92	24	25	0,610	1	1	43631	25	0		
1	92	24	30	0,655	1	1	43631	30	0		
1	92	24	35	0,690	1	1	43631	35	0		
1	92	24	40	0,730	1	1	43631	40	0		
1	92	24	45	0,780	1	1	43631	45	0		


WHILE STOCK LASTS
Replaced by 43661 serie

- D TYPE OPERATION
- Inside:
Panic exit device for opening
Key for closing with dead-bolt
- Outside:
Key for closing with dead-bolt.
The handle, with dead-bolt withdrawn, is activated for latch operation

1	92	24	25	0,610	1	1	43632	25	0		
1	92	24	30	0,655	1	1	43632	30	0		
1	92	24	35	0,774	1	1	43632	35	0		
1	92	24	40	0,730	1	1	43632	40	0		
1	92	24	45	0,780	1	1	43632	45	0		

WHILE STOCK LASTS
Replaced by 43662 serie

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- FOR DOUBLE DOORS
- Panic lock series 43690 to be installed on secondary leaf
- Dead-bolt and latch
- A TYPE OPERATION
- Inside:
 - Panic exit device for opening
 - Key for closing with dead-bolt
- Outside:
 - Key for activating latch and dead-bolt

1	92	24	25	0,560	1	1	43650 25 0
1	92	24	30	0,610	1	1	43650 30 0
1	92	24	35	0,725	1	1	43650 35 0
1	92	24	40	0,770	1	1	43650 40 0
1	92	24	45	0,710	1	1	43650 45 0

- B TYPE OPERATION
- Inside:
 - Panic exit device for opening
 - Key for closing with dead-bolt and activating or disactivating external handle for latch operation
- Outside:
 - Key for closing with dead-bolt and activating or disactivating external handle for latch operation


1	92	24	25	0,640	1	1	43660 25 0
1	92	24	30	0,610	1	1	43660 30 0
1	92	24	35	0,725	1	1	43660 35 0
1	92	24	40	0,760	1	1	43660 40 0
1	92	24	45	0,710	1	1	43660 45 0

- C TYPE OPERATION
- Inside:
 - Panic exit device for opening
 - Key for closing with dead-bolt and activating external handle for latch operation
- Outside:
 - Key for closing with dead-bolt and activating external handle for latch operation

1	92	24	25	0,560	1	1	43661 25 0
1	92	24	35	0,640	1	1	43661 35 0
1	92	24	40	0,670	1	1	43661 40 0
1	92	24	45	0,710	1	1	43661 45 0

- D TYPE OPERATION
- Inside:
 - Panic exit device for opening
 - Key for closing with dead-bolt
- Outside:
 - Key for closing with dead-bolt. The handle, with dead-bolt withdrawn, is activated for latch operation


1	92	24	25	0,560	1	1	43662 25 0
1	92	24	30	0,610	1	1	43662 30 0
1	92	24	35	0,715	1	1	43662 35 0
1	92	24	40	0,760	1	1	43662 40 0
1	92	24	45	0,710	1	1	43662 45 0



- FOR SECONDARY LEAF OF A DOUBLE DOOR
- Panic lock series 43650, 43660, 43661, 43662 to be installed on secondary leaf
- OPERATION:
- Inside:panic exit device
- ON REQUEST:
 - Extended bolts item 1.07088.03.0
 - Automatic dogging device item 1.07089.50.0
 - Top striker item 1.06141.80.0


28	24	30	0,795	1	1	43690 30 0
28	24	40	0,865	1	1	43690 40 0
28	24	60	1,020	1	1	43690 60 0
28	24	75	1,100	1	1	43690 75 0

Type	Description	For series/item	 Unit weight  Pieces	ITEM			
				Type	Dim.	Hand	Fin.



• Set of zinc plated side latches

43024, 43114 0,900 24 1 07090 50 0



• Set of zinc plated rods

1 07090 50 0 0,230 24 1 07091 50 0



Technical features:

- Black painted aluminium casings or black nylon
- Internal, zinc-plated steel components, suitable for fire doors

Supplied as standard:

- Fixing screws
- Instruction sheet for assembly and maintenance
- CE and ICIM certification

Finish:

- ON REQUEST: 59615-59646 series
Painted gray (fin. 97)


Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the UNI EN 1125 standard


Hand:

0 = Non-handed

Bar to be ordered separately



Type	Description	Spindle hole	Centre Distance	Unit weight 	Pieces 	ITEM			
						Type	Dim.	Hand	Fin. Pers. Spec.




- Black nylon casing
- May be combined with mortice locks series 43100, 43600
- Pre-arranged for single cylinder

9 72 1,400 1 1 59616 00 0



- Black nylon casing
- May be combined with mortice locks series 43100
- Pre-arranged for double cylinder

9 72 1,350 1 1 59616 10 0

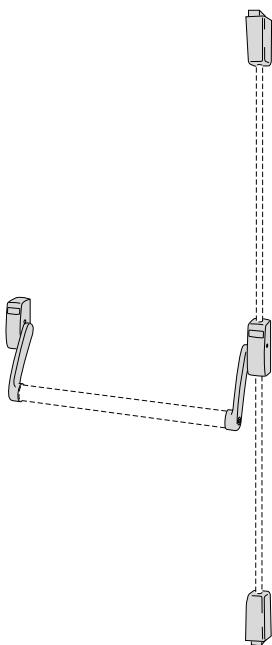

- Black nylon cover
- FOR THE SECONDARY LEAF OF A DOUBLE DOOR, where it is not possible to assemble the safety lock
- On the main door it is possible to install the panic exit devices series 59615 together with the locks series 43110 and 43114
- SUPPLIED AS STANDARD:
Striker art. 1.07072.11.0
Floor striker art. 1.07073.11.0
- TO BE ORDERED SEPARATELY
Pair of extended bolts art. 1.07081.12.0

- 2,050 1 1 59647 00 0



Technical features:

- Painted aluminum alloy/aluminum cover (59607 series)
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Finishes:

- STANDARD: Painted black

ON REQUEST:

- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- PVD treatment: satin-finished stainless steel (fin. C2)
- Painted steel grey (fin. B9)

Hand:
0 = Non-handed

Bar to be ordered separately





series 07007

Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

FAST Push

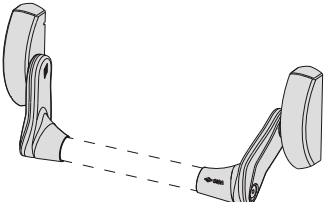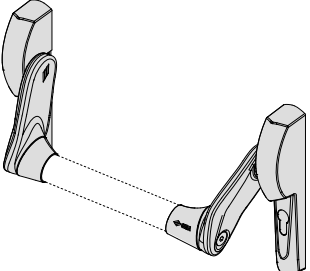Type	Description	Spindle hole L	Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> • Can be combined with panic function locks • Satin finished PVD treated stainless steel 	8/9	1,900	1	1	59607	10	0	
	8/9	1,650	1	1	59607	10	0	C2
 <ul style="list-style-type: none"> • Black nylon casing • Can be combined with panic function locks 	8/9	72	1,350	1	1	59617	00	0
	8/9	92	1,350	1	1	59617	10	0

N.B. To install a bar on a double-leaf door, use the 59016+07063.61 serie (PERS. FR.)



FAST Touch

Technical features:

- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Standards:

- Cover: black bar: red




ON REQUEST

- (only item 1.59711-00/10-0):
- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: green bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- PVD treatment: satin-finished stainless steel (fin. C2)
- Carter and bar painted steel grey (fin. B9)

Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

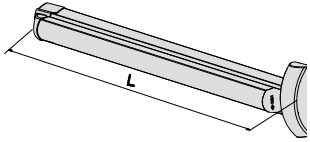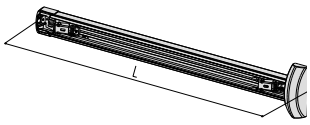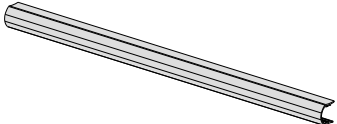Type	Description	Spindle hole	L	Unit weight	Pieces	ITEM					
						Type	Dim.	Hand	Fin.	Pers.	Spec.
 <ul style="list-style-type: none"> • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 and 43100 (spec. FR) • Satin finished PVD treated stainless steel • Can be combined with panic function locks series Exitlock and Sicur Panic • Satin finished PVD treated stainless steel 		8/9	1200	3,366	1	1	59711	00	0		
		8/9	840	2,592	1	1	59711	01	0		
		8/9	1200	3,366	1	1	59711	00	0	C2	
		8/9	1200	3,360	1	1	59711	10	0		
		8/9	840	2,592	1	1	59711	11	0		
		8/9	1200	3,366	1	1	59711	10	0	C2	
 <ul style="list-style-type: none"> • SUPPLIED WITHOUT PUSH BAR VERSION • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 and 43100 (spec. FR) • Can be combined with panic function locks series Exitlock and Sicur Panic 		8/9	1200	2,366	1	1	59711	00	0	00	SB
		8/9	1200	2,360	1	1	59711	10	0	00	SB
 <ul style="list-style-type: none"> • Bar • May be combined with panic exit devices series 1.59711.00.0.00.SB - 1.59711.10.0.00.SB • STANDARD FINISHES painted red • BAR COLOR OPTIONS: Satin finished anodized aluminium (fin. 62) Anodized bronze (fin. 64) Brass-plated (fin. A1) Matt black (fin. 00) Red (fin. 41) Yellow (fin. 42) Green (fin. 43) White (fin. 45) Grey (fin. 97) 				1,000	1	1	06196	43	0		



Technical features:

- Steel case cover, painted black

Supplied as standard:

- Fixing screws
- Instruction sheet
- ICIM and CE Certification

Finishes:

- **STANDARD:**
 - painted black
- **ON REQUEST:**
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:


0 = Non-handed

Bar to be ordered separately

series 07007

CISA Prestige

Type	Description	Unit weight 	Pieces 	ITEM			
				Type	Dim.	Hand	Fin.



- May be combined with panic function mortice locks series 43100, 43200, 43600 and heavy duty mortice locks series 52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864 (see locks for wooden doors)
- For assembly with fire resistant locks specify Spec. FR in your order
- Use inside plates item 1.07076.65.0 and 1.07066.66.0 to mount the panic exit device with matching lock

2,500 1 1 59321 10 0



Technical features:

- Stainless steel case cover

Supplied as standard:

- Fixing screws
- Instruction sheet
- ICIM and CE Certification

Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:

0 = Non-handed


Bar to be ordered separately



series 07007

CISA Prestige

Type	Description	Unit weight	Pieces	ITEM			
				Type	Dim.	Hand	Pers. Spec.



- May be combined with panic function mortice locks series 43100, 43200, 43600 and heavy duty mortice locks series 52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864 (see locks for wooden doors)
- For assembly with fire resistant locks specify Spec. FR in your order
- For use inside plates item 1.07076.65.0 and 1.07066.66.0 to mount the panic exit device with matching lock

2,650 1 1 59371 10 0



Technical features:

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:

- 8/9 mm square spindle.

On request:

- European profile cylinder.
- Timer item 1.07022.20.0.


Finishes:

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Hand:

0 = Non-handed

Type	Description	Faceplate	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

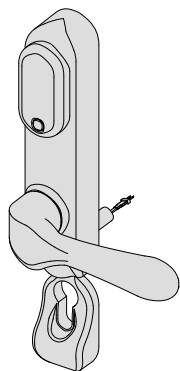


- Electrically enabled handle
- Can be installed with locks series 43100
- Handle to cylinder distance 72 mm
- **STANDARD SUPPLY:**
Connecting cable
fixing screws
- **ON REQUEST:**
Timer device 07022.20.0

1,150 1 1 07074 70 0



- Electrically enabled handle (A function only)
- Can be installed with locks series 43225, 43250, 43650, 43670, 43725, 43825
- Handle to cylinder distance 92 mm
- **STANDARD SUPPLY:**
Connecting cable
Fixing screws
- **ON REQUEST:**
Timer device 07022.20.0







1,150 1 1 07074 71 0



- Multiple scale timer


0,100 1 1 07022 20 0

Type	Description	L	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> • Red painted steel oval shaped bar • AVAILABLE FINISHES (extra price): <ul style="list-style-type: none"> yellow painted (fin. 42) green painted (fin. 43) black painted (fin. 44) white painted (fin. 45) grey painted (fin. 97) painting steel grey (fin. B9) 	900	0,800	1	1	07007	13	0		
	1200	1,054	1	1	07007	14	0		
	1500	1,440	1	1	07007	15	0		
 <ul style="list-style-type: none"> • Stainless steel oval shaped horizontal bar 	900	0,800	1	1	07007	60	0		
	1200	1,070	1	1	07007	61	0		
	1500	1,400	1	1	07007	62	0		

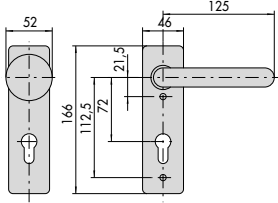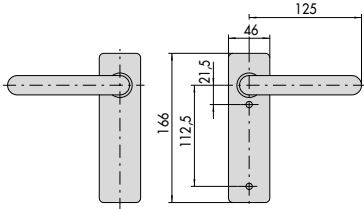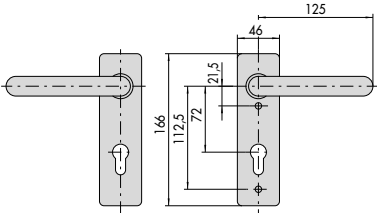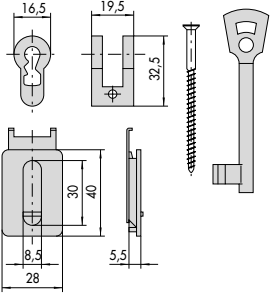Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of plates with cylinder hole 	43000, 43020	0,200	6	1	07070	12	0
	<ul style="list-style-type: none"> • Set of plates with fixed handle knob and cylinder hole 	43000, 43020, 43025	0,600	6	1	07070	14	0
	<ul style="list-style-type: none"> • Set of plates with handles 	43000, 43020, 43025	0,410	6	1	07070	15	0
	<ul style="list-style-type: none"> • Set of plates with handles and cylinder hole 	43000, 43020, 43025	0,626	6	1	07070	16	0
	<ul style="list-style-type: none"> • Cylinder adaptor for bit keys (patent type) • SUPPLIED AS STANDARD: Bitted key Fixing screws 2 nylon escutcheons with plug, to be combined with handles series 1.07070.12/14/16 	43000, 43020, 43025	0,066	6	1	07071	10	0
	<ul style="list-style-type: none"> • Galvanized steel striker plate 	43000, 43100	0,150	20	1	07073	20	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Galvanized steel striker plate 	43000, 43100	0,117	20	1	07073	21	0
	<ul style="list-style-type: none"> Outside plate for reinforced assembly To be combined with panic exit devices series 59600 and 59710 with distance 72 mm 	43110, 43115, 43120, 43130	0,204	6	1	07076	11	0
	<ul style="list-style-type: none"> Outside plate with fixed knob To be combined with panic exit devices series 59600 and 59710 with distance 72 mm 	43110, 43115, 43120, 43130	0,160	6	1	07076	13	0
	<ul style="list-style-type: none"> Outside plate with fixed knob and cylinder hole To be combined with panic exit devices series 59600 and 59710 with distance 72 mm 	43110, 43115, 43120, 43130	0,264	6	1	07076	14	0
	<ul style="list-style-type: none"> Outside plate with handle To be combined with panic exit devices series 59600 and 59710 with distance 72 mm 	43110, 43115, 43120, 43130	0,250	6	1	07076	15	0
	<ul style="list-style-type: none"> Outside plate with handle and cylinder hole To be combined with panic exit devices series 59600 and 59710 with distance 72 mm 	43110, 43115, 43120, 43130	0,400	6	1	07076	16	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris. Spec.




- Black painted inside plate
- Can be installed with panic exit devices
- To be combined with European profile cylinder protective roses on armoured doors
- FINISHES ON REQUEST:
 painted red (fin. 41)
 painted yellow (fin. 42)
 painted green (fin. 43)
 painted white (fin. 45)
 painted grey (fin. 97)

0,106 6 1 07076 70 0

- Satin finished PVD treated stainless steel

0,106 6 1 07076 70 0 C2




- Black painted inside plate
- Can be installed with mortice version panic exit devices
- To be combined with European profile cylinder protective roses on armoured doors
- FINISHES ON REQUEST:
 painted red (fin. 41)
 painted yellow (fin. 42)
 painted green (fin. 43)
 painted white (fin. 45)
 painted grey (fin. 97)

0,106 6 1 07076 71 0


- Satin finished PVD treated stainless steel

0,106 6 1 07076 71 0 C2



- Black painted steel extended bolts
- For use with:
 Panic exit devices series 59647

1 07063 00 0, 1,130 1 1 07081 12 0
 1 07063 10 1,
 1 07063 10 2




- Black painted inside plate
- May be assembly with locks 72 mm centre distance

59321, 59371 0,100 1 1 07076 65 0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Black painted inside plate • May be assembly with locks 92 mm centre distance 	59321, 59371	0,250	1	1	07076	66	0
	• Steel split spindle		0,060	6	1	07083	50	0
	• Steel split spindle		0,060	6	1	07083	51	0
	• Steel split spindle		0,060	6	1	07083	52	0
	• Steel split spindle		0,060	6	1	07083	53	0
	• Steel spindle		0,030	6	1	07083	70	0
	• Steel spindle		0,038	1	1	07085	75	0
	• Steel spindle		0,060	1	1	07085	76	0
	• Automatic dogging device, steel	43090, 43190, 43690	0,050	3	1	07089	50	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.




- Zinc plated extended bolts
- SUPPLIED AS STANDARD:
Pair of bolts diameter 8 mm.
Hardened steel tip diameter 10 mm.
item 1.06291.05.0 (Pcs. 2)

16325, 17358, 46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,600	12	1	07088	03	0
---	-------	----	---	-------	----	---



- Open door indicator

07074	0,005	1	1	07126	01	0
-------	-------	---	---	-------	----	---

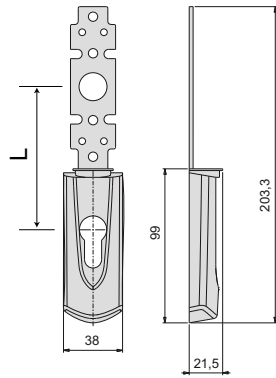


- Black painted outside plate
- Can be installed with Fast Touch panic exit devices series 59711
- FINISHES ON REQUEST:
painted red (fin. 41)
painted yellow (fin. 42)
painted green (fin. 43)
painted white (fin. 45)
painted grey (fin. 97)
L=72 (dim. 61)
L=85 (dim. 62)
L=92 (dim. 63)

0,110	6	1	07176	61	0
0,110	6	1	07176	62	0
0,110	6	1	07176	63	0

- Satin finished PVD treated stainless steel

0,110	6	1	07176	61	0 C2
0,110	6	1	07176	62	0 C2
0,110	6	1	07176	63	0 C2

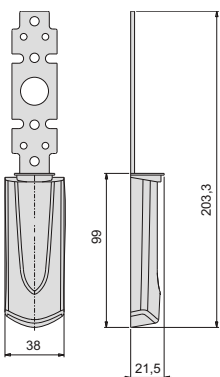


- Black painted outside plate
- Can be installed with Fast Touch panic exit devices series 59711
- FINISHES ON REQUEST:
painted red (fin. 41)
painted yellow (fin. 42)
painted green (fin. 43)
painted white (fin. 45)
painted grey (fin. 97)

0,110	6	1	07176	66	0
-------	---	---	-------	----	---

- Satin finished PVD treated stainless steel


0,110	6	1	07176	66	0 C2
-------	---	---	-------	----	------

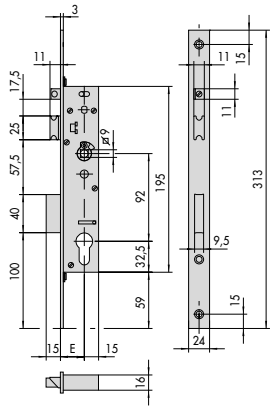

43520, 43530, 43620, 43630, 43631, 43632


E = 25 - 30 - 35 - 40 - 45

10

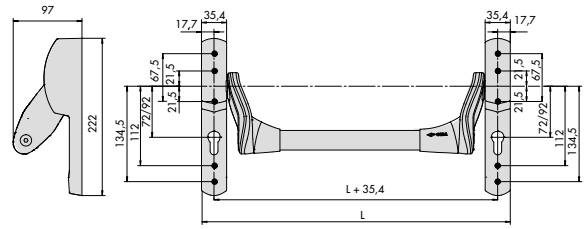

59607 - 59617


14

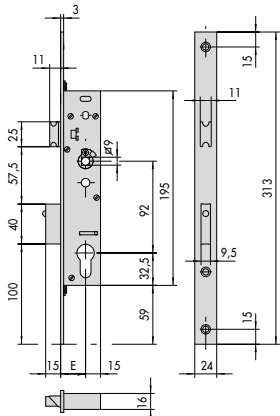

43650, 43660, 43661, 43662


E = 25 - 30 - 35 - 40 - 45

11

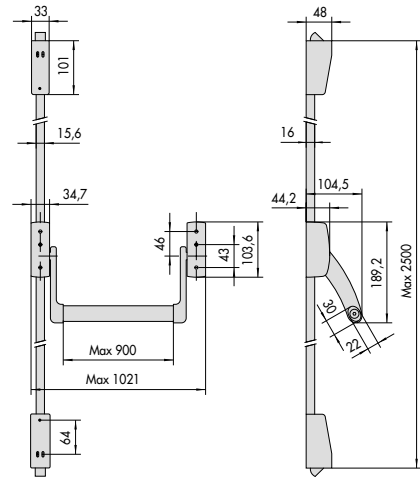

59647


15

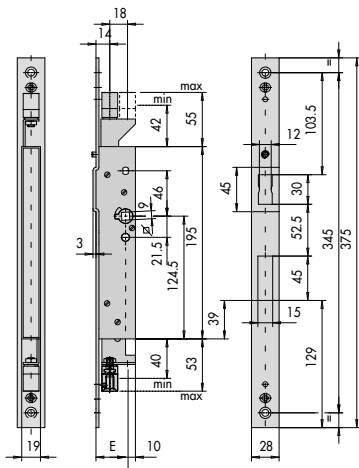

43690


E = 30 - 40 - 60

12

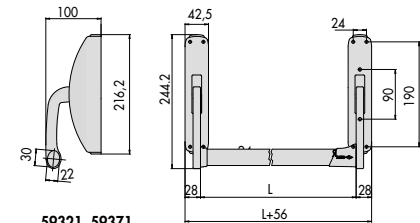


59321, 59371

16

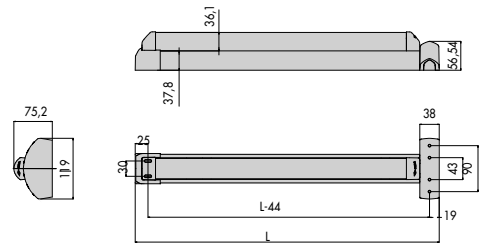

59711

17

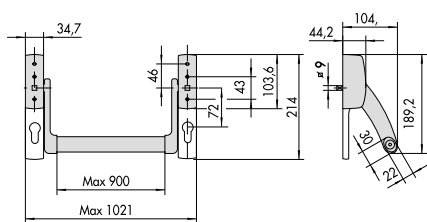

59616

13



Locks and panic exit devices




Panic exit devices, mortice version	432	Cisa FAST PUSH-PAD series panic exit devices	470
Sikurexit system instructions	433	Kit for additional locking points for cisa FAST	
Panic function mortice locks with split follower	445	panic exit devices	471
Sikurexit system certified products itemized list	446	CISA prestige series panic exit devices.....	473
Sikurexit series panic function mortice locks.....	447	Kits for additional locking points for CISA	
Panic function mortice locks.....	451	prestige panic exit devices.....	474
Exitlock panic function rim locks	452	CISA prestige INOX series panic exit devices	476
Exitlock panic function mortice locks	453	Kits for additional locking points for CISA	
Heavy Duty cylinder mortice locks.....	454	prestige inox panic exit devices	477
Cylinder mortice locks.....	456	Outside operation devices for panic exit devices	
Cisa FAST PUSH series panic exit devices for		FAST and prestige	479
panic function mortice locks.....	457	Electric handles	481
Cisa FAST TOUCH series panic exit devices for		Electric strikers for panic exit devices	482
panic function mortice locks.....	458	Horizontal bars for panic exit devices	483
Electric handles	459	Kit glass for assembling panic exit devices on glazed doors	484
Adjustable metal striking plates.....	460	Accessories for panic exit devices.....	486
Accessories for panic exit devices	462	Dimensional drawings.....	492
Panic exit devices, rim version	466	Installation of panic exit devices for single doors	496
Cisa FAST PUSH series panic exit devices	467	Installation of panic exit devices for double doors.....	497
Cisa FAST TOUCH series panic exit devices	468		





Panic exit devices,
mortice version

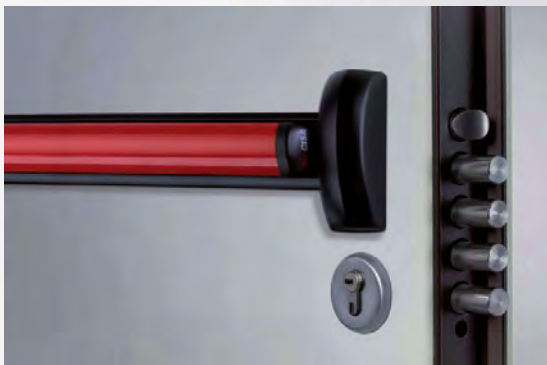

All round security

CISA panic exit device installation in combination with SikurExit, the multipoint, panic function lock for aluminum doors, with Exitlock, the panic function lock for armored doors, and with other panic function locks available from the CISA range ensures the greatest anti-burglary protection in heavy human traffic buildings, allowing at the same time quick exit from the building in case of danger.

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-17-0
AL-SISTEM	SICURBLIN 65	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	PLANET 50 TT	43725-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	06463-14-0		06465-04-0	0A310-31-0
ALLUSISTEMI	PLANET 72 HT	43725-40-0	06463-32-0		06465-22-0	0A310-24-0
	CX 600 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-33-0
ALU-K	CX 700 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	ALU-K 56 ID	43825-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
EKONAL	ALU-K 70 ID	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	E 65	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riparto	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	E 75 con riparto	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
	PRESTO 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
HYDRO ALLUMINIO	NEW-TEC 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	DOMAL STOPPER PG 52 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	06461-35-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 500	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riparto	43725-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
JANSEN	VIP DOOR 69 TT	43725-35-0	06461-30-0		06461-34-0	0A310-18-0
	Serie 50 ECONOMY	43825-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	06461-07-0		06461-12-0	0A310-13-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push art. 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Single leaf door						
	Manufacturer	Series	Lock	Striker	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT		43725-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT		43725-40-0	06463-32-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base		43825-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta		43825-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.		43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.		43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH		43825-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO		43825-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50		43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65		43825-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65		43825-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50		43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)		43825-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)		43825-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT		43725-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT		43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT		43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT		43725-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)		43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)		43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta		43825-30-0	06463-14-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT		43725-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50		43725-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua		43725-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto		43725-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto		43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA		43825-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA		43825-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)		43825-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/Hi (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)		43825-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55		43825-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT		43825-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT		43825-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10		43825-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta		43725-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push art. 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles		Double leaf door				
Manufacturer	Series	Lock	Lock	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta	43825-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.	43725-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta	43825-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riparto	43725-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riparto	43725-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	43295-40-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 500	43725-35-0	43295-60-0		06465-22-0	0A310-27-0
IND INVEST	GOLD 500 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riparto	43725-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	43295-40-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	43295-40-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	43295-40-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	43295-30-0		06461-12-0	0A310-13-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
- Panic exit devices FAST Push art. 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
- Bolts item 07088.-03.-0 (1 pc)
- Automatic extended bolt closure restoring item 07089-52-0 (1 pc)
- Manual extended bolt closure restoring item 06141-80-0 (1 pc)
- Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Double leaf door						
	Manufacturer	Series	Lock	Lock	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT		43725-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT		43725-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base		43825-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta		43825-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.		43825-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH		43825-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO		43825-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50		43825-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65		43825-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65		43825-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50		43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)		43825-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)		43825-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT		43725-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT		43725-40-0	43295-60-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT		43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT		43725-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)		43725-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
EKU DOOR 74 TT Porta		43825-30-0	43295-40-0		06465-04-0	0A310-20-0	
SAPA (ex Alcoa)	ALFIL 54 TT		43725-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50		43725-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua		43725-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto		43725-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto		43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA		43825-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA		43825-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)		43825-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)		43825-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)		43825-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)		43825-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)		43825-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/Hi (fuga 11)		43825-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)		43825-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55		43825-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT		43825-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT		43825-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10		43825-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta		43825-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta		43725-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)

Panic exit devices FAST Push art. 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.

Bolts item 07088.-03.-0 (1 pc)

Automatic extended bolt closure restoring item 07089-52-0 (1 pc)

Manual extended bolt closure restoring item 06141-80-0 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43735-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43735-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43735-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43735-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-17-0
AL-SISTEM	SICURBLIN 65	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	PLANET 50 TT	43735-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43835-35-0	06463-14-0		06465-04-0	0A310-31-0
ALLUSISTEMI	PLANET 72 HT	43735-40-0	06463-32-0		06465-22-0	0A310-24-0
	CX 600 (camera europea)	43735-40-0	06463-32-0		06465-22-0	0A310-33-0
ALU-K	CX 700 (camera europea)	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
	ALU-K 56 ID	43835-35-0	06461-35-0		06461-39-0	0A310-12-0
ALU-K	ALU-K 63 ID	43835-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43835-35-0	06461-35-0		06461-39-0	0A310-33-0
	E 65	43735-35-0	06461-30-0		06461-34-0	0A310-17-0
EKONAL	E 65 con riparto	43735-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43735-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riparto	43735-35-0	06461-30-0		06461-34-0	0A310-20-0
	PRESTO 50	43835-40-0	06461-07-0		06461-12-0	0A310-07-0
FORSTER	THERM TUR	43835-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43835-35-0	06461-17-0		06461-22-0	0A310-18-0
	EUROLINE 50 N Porta	43835-40-0	06461-30-0		06461-34-0	0A310-07-0
GASTALDELLO	EUROLINE 60 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43735-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-17-0
HYDRO ALLUMINIO	NEW-TEC 68 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	DOMAL STOPPER PG 52 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43735-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43835-30-0	06461-35-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 500	43735-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riparto	43735-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
JANSEN	PLATHINA 69 TT PORTA	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43735-35-0	06461-30-0		06461-34-0	0A310-18-0
	Serie 50 ECONOMY	43835-35-0	06461-07-0		06461-12-0	0A310-07-0
JANSEN	Serie 60	43835-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43835-35-0	06461-07-0		06461-12-0	0A310-13-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00-0 (1 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Single leaf door						
	Manufacturer	Series	Lock	Striker	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT		43735-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT		43735-40-0	06463-32-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base		43835-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta		43835-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.		43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.		43835-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH		43835-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO		43835-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50		43835-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65		43835-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65		43835-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50		43835-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)		43835-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)		43835-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta		43835-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT		43735-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta		43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT		43735-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT		43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT		43735-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta		43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)		43735-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)		43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
EKU DOOR 74 TT Porta		43835-30-0	06463-14-0		06465-04-0	0A310-20-0	
SAPA (ex Alcoa)	ALFIL 54 TT		43735-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50		43735-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua		43735-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto		43735-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto		43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA		43835-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA		43835-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)		43835-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)		43835-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)		43835-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)		43835-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)		43835-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/Hi (fuga 11)		43835-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)		43835-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55		43835-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT		43835-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT		43835-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10		43835-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta		43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta		43735-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Double leaf door						
	Manufacturer	Series	Lock	Lock	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56		43735-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT		43735-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta		43835-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.		43735-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta		43835-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.		43735-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta		43835-30-0	43295-30-0		06465-04-0	0A300-17-0
AL-SISTEM	SICURBLIN 65		43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	PLANET 50 TT		43735-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT		43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT		43835-35-0	43295-60-0		06465-04-0	0A310-31-0
ALLUSISTEMI	PLANET 72 HT		43735-40-0	43295-60-0		06465-22-0	0A310-24-0
	CX 600 (camera europea)		43735-40-0	43295-60-0		06465-22-0	0A310-33-0
ALU-K	CX 700 (camera europea)		43735-40-0	43295-60-0		06465-22-0	0A310-41-0
	ALU-K 56 ID		43835-35-0	43295-40-0		06461-39-0	0A310-12-0
ALU-K	ALU-K 63 ID		43835-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID		43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID		43835-35-0	43295-40-0		06461-39-0	0A310-33-0
	E 65		43735-35-0	43295-40-0		06461-34-0	0A310-17-0
EKONAL	E 65 con riparto		43735-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75		43735-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riparto		43735-35-0	43295-60-0		06461-34-0	0A310-20-0
	PRESTO 50		43835-40-0	43295-40-0		06461-12-0	0A310-07-0
FORSTER	THERM TUR		43835-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO		43835-35-0	43295-40-0		06461-22-0	0A310-18-0
	EUROLINE 50 N Porta		43835-40-0	43295-30-0		06461-34-0	0A310-07-0
GASTALDELLO	EUROLINE 60 TT Porta		43835-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sarm.		43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta		43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta		43835-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta		43835-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta		43835-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sarm.		43735-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sarm.		43735-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sarm.		43735-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sarm.		43735-35-0	43295-60-0		06465-21-0	0A310-17-0
HYDRO ALLUMINIO	NEW-TEC 68 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	DOMAL STOPPER PG 52 Porta		43835-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta		43835-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS		43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62		43735-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta		43835-30-0	43295-40-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65		43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 500		43735-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta		43835-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.		43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riparto		43735-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT		43735-40-0	43295-75-0		06465-22-0	0A310-41-0
JANSEN	PLATHINA 69 TT PORTA		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT		43735-35-0	43295-40-0		06461-34-0	0A310-18-0
	Serie JANISOL 60 TT		43835-35-0	43295-30-0		06461-12-0	0A310-13-0
	Serie 50 ECONOMY		43835-35-0	43295-40-0		06461-12-0	0A310-07-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
- Panic exit devices FAST Push art. 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
- Bolts item 07088.-03.-0 (1 pc)
- Automatic extended bolt closure restoring item 07089-52-0 (1 pc)
- Manual extended bolt closure restoring item 06141-80-0 (1 pc)
- External handle item 07070.-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Double leaf door						
	Manufacturer	Series	Lock	Lock	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
JANSEN	Serie 60		43835-35-0	43295-40-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT		43735-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT		43735-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 l Linea base		43835-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta		43835-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.		43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.		43835-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH		43835-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO		43835-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50		43835-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65		43835-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65		43835-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50		43835-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)		43835-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)		43835-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta		43835-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PONZIO	EKIP MAAS.STH 76 Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	WINDSTOP 55 TT		43735-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta		43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
PREDIERI	WINDSTOP 73 TT		43735-40-0	43295-60-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	PR 58 Porta		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT		43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT		43735-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta		43835-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)		43735-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)		43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
EKU DOOR 74 TT Porta		43835-30-0	43295-40-0		06465-04-0	0A310-20-0	
SAPA (ex Alcoa)	ALFIL 54 TT		43735-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50		43735-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua		43735-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto		43735-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto		43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA		43835-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA		43835-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)		43835-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
Tekno WIN 70 TT Porta (ex F60 TT)		43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0	
SCHUCO	ADS 50 (fuga 11)		43835-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)		43835-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)		43835-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)		43835-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/Hi (fuga 11)		43835-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)		43835-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55		43835-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT		43835-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT		43835-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10		43835-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta		43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta		43835-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta		43735-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)

Panic exit devices FAST Push art. 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.

Bolts item 07088.-03.-0 (1 pc)

Automatic extended bolt closure restoring item 07089-52-0 (1 pc)

Manual extended bolt closure restoring item 06141-80-0 (1 pc)

External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-17-0
	SICURBLIN 65	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	06463-14-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	06463-32-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riparto	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riparto	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	06461-35-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riparto	43725-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	06461-30-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	06461-07-0		06461-12-0	0A310-13-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push art. 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

External handle item 07070-66-0-81 (1 pc)

Square spindle, 8 mm item 07206-00-0 (1 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Single leaf door					
Manufacturer	Series	Lock	Striker	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base	43825-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43725-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/Hi (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push art. 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Double leaf door						
	Manufacturer	Series	Lock	Lock	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56		43725-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT		43725-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.		43725-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta		43825-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.		43725-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta		43825-30-0	43295-30-0		06465-04-0	0A300-17-0
AL-SISTEM	SICURBLIN 65		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	PLANET 50 TT		43725-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT		43825-35-0	43295-60-0		06465-04-0	0A310-31-0
ALLUSISTEMI	PLANET 72 HT		43725-40-0	43295-60-0		06465-22-0	0A310-24-0
	CX 600 (camera europea)		43725-40-0	43295-60-0		06465-22-0	0A310-33-0
ALU-K	CX 700 (camera europea)		43725-40-0	43295-60-0		06465-22-0	0A310-41-0
	ALU-K 56 ID		43825-35-0	43295-40-0		06461-39-0	0A310-12-0
ALU-K	ALU-K 63 ID		43825-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID		43825-35-0	43295-40-0		06461-39-0	0A310-33-0
	E 65		43725-35-0	43295-40-0		06461-34-0	0A310-17-0
EKONAL	E 65 con riparto		43725-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75		43725-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riparto		43725-35-0	43295-60-0		06461-34-0	0A310-20-0
	PRESTO 50		43825-40-0	43295-40-0		06461-12-0	0A310-07-0
FORSTER	THERM TUR		43825-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO		43825-35-0	43295-40-0		06461-22-0	0A310-18-0
	EUROLINE 50 N Porta		43825-40-0	43295-30-0		06461-34-0	0A310-07-0
GASTALDELLO	EUROLINE 60 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.		43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.		43725-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-17-0
HYDRO ALLUMINIO	NEW-TEC 68 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	DOMAL STOPPER PG 52 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62		43725-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta		43825-30-0	43295-40-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 500		43725-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riparto		43725-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT		43725-40-0	43295-75-0		06465-22-0	0A310-41-0
JANSEN	PLATHINA 69 TT PORTA		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT		43725-35-0	43295-40-0		06461-34-0	0A310-18-0
	Serie 50 ECONOMY		43825-35-0	43295-40-0		06461-12-0	0A310-07-0
	Serie 60		43825-35-0	43295-40-0		06461-12-0	0A310-13-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
- Panic exit devices FAST Push art. 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
- Bolts item 07088.-03.-0 (1 pc)
- Automatic extended bolt closure restoring item 07089-52-0 (1 pc)
- Manual extended bolt closure restoring item 06141-80-0 (1 pc)
- External handle item 07070.-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striking plate for diverting devices (2 pcs)	Cylinder Fin. 12
MERCURI	Serie JANISOL 60 TT	43825-35-0	43295-30-0		06461-12-0	0A310-13-0
	MERCURY 500 TT	43725-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 l Linea base	43825-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PONZIO	EKIP MAAS.STH 76 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	WINDSTOP 55 TT	43725-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
PREDIERI	WINDSTOP 73 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	PR 58 Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
EKU DOOR 74 TT Porta	43825-30-0	43295-40-0		06465-04-0	0A310-20-0	
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0	
SCHUCO	ADS 50 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/Hi (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)

Panic exit devices FAST Push art. 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.

















Bolts item 07088.-03.-0 (1 pc)

Automatic extended bolt closure restoring item 07089-52-0 (1 pc)

Manual extended bolt closure restoring item 06141-80-0 (1 pc)



External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (2 pc)

TYPE	CONTROLS	OPERATION	
<p>A</p> <p>OUTSIDE ENTRANCE BY KEY</p> <p>For doors which have to be opened with the key from the outside by authorized personnel only</p>	<p>INSIDE</p> <ul style="list-style-type: none"> - Panic exit device to open. - Key to close with dead-bolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> - The key operates latch and deadbolt. 	 <p>1 Outside entrance by key only.</p> 	 <p>2</p>  <p>Locking with the deadbolt, outside entrance is possible only with the use of the key.</p>
<p>B</p> <p>OUTSIDE HANDLE ACTIVATED OR DISACTIVATED</p> <p>For doors that open outwards and places where it is necessary to provide free entrance.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> - Panic exit device to open. - Key to close with dead-bolt and activate or deactivate the outside handle. <p>OUTSIDE</p> <ul style="list-style-type: none"> - The key operates the dead-bolt and activates or deactivates the outside handle for latch operation. 	 <p>1</p> <p>The outside handle is activated by rotating the key in the lock-opening direction as far as it will go (the handle remains activated when the key is removed).</p> 	 <p>2</p>  <p>Closing with the dead-bolt deactivates the outside handle; the latter remains deactivated even after the door has been opened with the panic exit device.</p>
<p>C</p> <p>OUTSIDE HANDLE AUTOMATICALLY DISACTIVATED</p> <p>For doors that must be opened from the outside only by authorized persons.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> - Panic exit device to open. - Key to close with dead-bolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> - The key operates the throw and activates the handle. 	 <p>1</p> <p>The outside handle is activated by rotating the key in the lock-opening direction as far as it will go, after first withdrawing the dead-bolt.</p> 	 <p>2</p>  <p>Removing the key automatically deactivates the outside handle.</p>
<p>D</p> <p>OUTSIDE HANDLE ALWAYS ACTIVATED</p> <p>For doors that partition throughways (e.g. corridors).</p>	<p>INSIDE</p> <ul style="list-style-type: none"> - Panic exit device to open. - Key to close with dead-bolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> - The key operates the dead-bolt. The handle, with the dead-bolt withdrawn, engages for latch operation. 	 <p>1</p> <p>The outside handle is always activated when the dead-bolt is withdrawn.</p> 	 <p>2</p>  <p>Entry is after using the panic exit device, always possible from the outside as long as the dead-bolt is not activated by the key.</p>

Single leaf door

Double leaf door

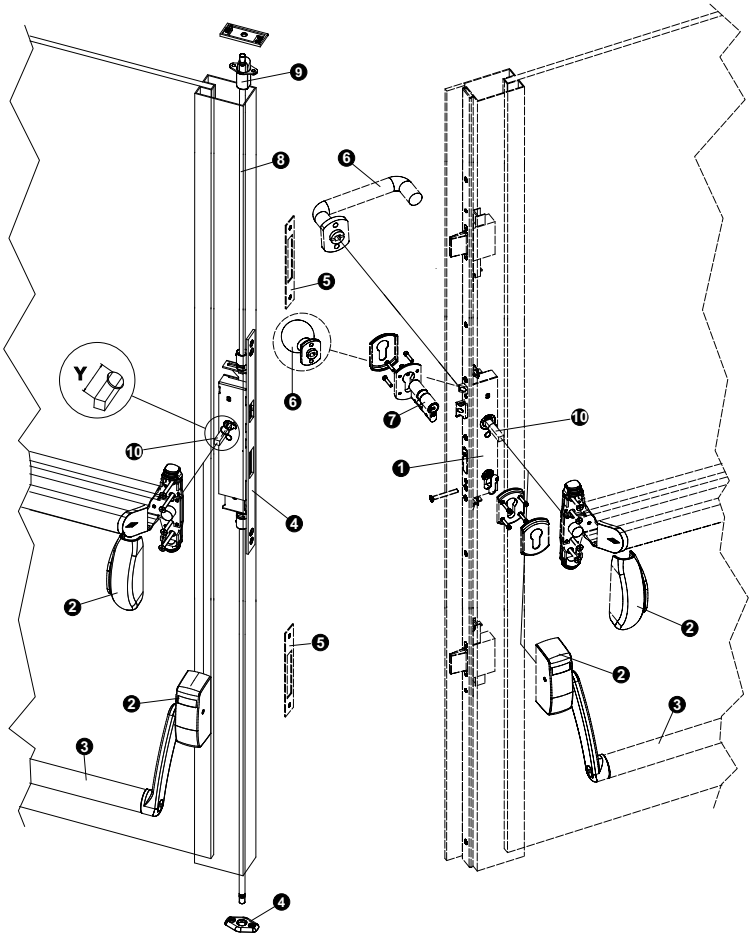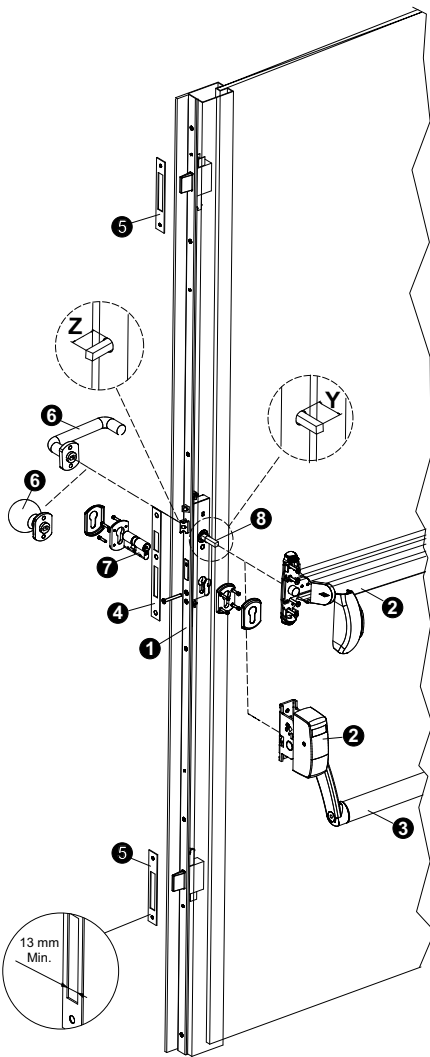

Single leaf door

1	2 EN1125	3	4	5	6	7	8
43725-XX-0	A		06463-14-0	06465-04-0	07070-56-0-B1	CISA	
43825-XX-0			06463-16-0	06465-06-0			
43735-XX-0	B	59607-10-0	06463-17-0	06465-07-0	07070-66-0-B1		07206-00-0
43835-XX-0			06463-31-0	06465-21-0			
43725-XX-0	D	07007-XX-0	06463-32-0	06465-22-0	07070-66-0-B1		
43825-XX-0			06463-33-0	06465-23-0			
43725-XX-0	A		06463-34-0	06465-24-0	07070-56-0-B1		
43825-XX-0			06463-35-0	06465-25-0			
43735-XX-0	B	59711-00-0	06461-07-0	06461-12-0	07070-66-0-B1		
43835-XX-0		59711-01-0	06461-17-0	06461-22-0			
43725-XX-0	D		06461-30-0	06461-34-0	07070-66-0-B1		
43825-XX-0			06461-35-0	06461-39-0			

Double leaf door

1	2 EN1125	3	4	5	6	7	8	9	10
43725-XX-0	A			06465-04-0	07070-56-0-B1	CISA			
43825-XX-0				06465-06-0					
43735-XX-0	B	59607-10-0	07007-XX-0	06465-07-0	07070-66-0-B1				
43835-XX-0				06465-21-0					
43725-XX-0	D			06465-22-0	07070-66-0-B1		07088-03-0	07089-52-0	07206-00-0
43825-XX-0			43295-XX-0	06465-23-0					
43725-XX-0	A			06465-24-0	07070-56-0-B1		07088-03-0	06141-80-0	
43825-XX-0				06465-25-0					
43735-XX-0	B	59711-00-0		06461-12-0	07070-66-0-B1				
43835-XX-0		59711-01-0		06461-22-0					
43725-XX-0	D			06461-34-0	07070-66-0-B1				
43825-XX-0				06461-39-0					

The Sikurexit system certification is only valid if the components contained in this itemized list are installed (certified system) - applicable standards EN1125 and EN179.

The system certification will no longer be valid if even just one unlisted component is installed:

- Only for the external drives and square spindle: the standard EN1125 is not binding in terms of listed component installation.

- Only for the square spindle: standard EN179 is not binding in terms of listed component installation.



Technical features:

- Steel case with zinc coating
- Top/bottom-adjustable stainless steel faceplate
- Adjustable nickel-plated anti-picking latchbolt and bolt
- Nickel-plated deadbolt
- Square spindle, 8 mm
- DIN holes for handle plate installation

On request:

- European profile cylinder
- Adjustable metal striking plates
- Cylinder protective rose item 1.06460-05-0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179)

- Handle item 1.07070.66.0.B1
- Safety lock series 43295 for double leaf doors
- Electric handle item 1.07074-71-0 (A function only)
- Rose item 1.06473-20/30-0-B1
- Square spindle, 8 mm item 1.07206.-00.-0 (L=100 mm)
- Electric strikers series 15100, 15200

Standards:

- UNI EN 179
- UNI EN 1129
- pr EN 15685:14
- Suitable for doors certified to EN 1627:2011 up to WK/RC 4 resistance class


Hand:
0 = Non-handed

Cylinder to be ordered separately



SikurExit

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
										Type	Dim.	Hand	Fin.

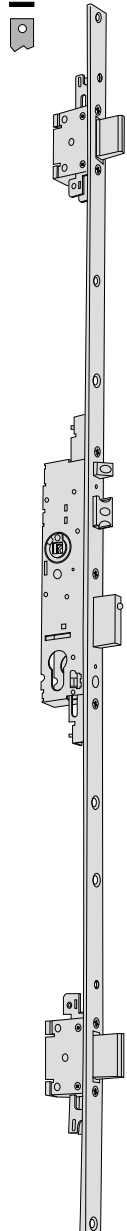

- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x3 mm - height 2,300 mm
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral dead-bolts
- Hold-open device in the version 43725
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the dead-bolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

FUNCTION TYPE A

- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt
- Outside:
 - Key to operate the latch and the dead-bolt

FUNCTION TYPE D

- Inside:
 - Panic exit device to open
 - key to close with the dead-bolt
- Outside:
 - Key to close with the dead-bolt
 - The handle can operate the latch bolt, with the dead-bolt withdrawn


FUNCTION TYPE B

- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch bolt
- Outside:
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch bolt

8	3	2	92	24	30	3,440	1	1	43725	30	0
8	3	2	92	24	35	3,440	1	1	43725	35	0
8	3	2	92	24	40	3,440	1	1	43725	40	0
8	3	2	92	24	45	3,440	1	1	43725	45	0

8	3	2	92	24	30	3,440	1	1	43735	30	0
8	3	2	92	24	35	3,440	1	1	43735	35	0
8	3	2	92	24	40	3,440	1	1	43735	40	0
8	3	2	92	24	45	3,440	1	1	43735	45	0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.

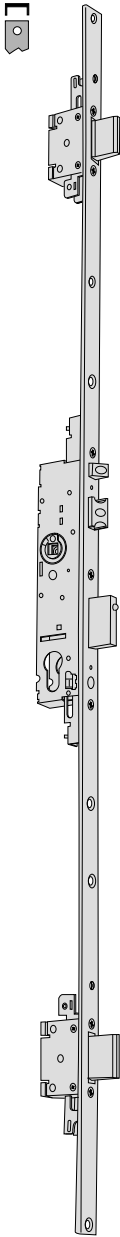

- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x3 mm - height 2,300 mm
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral dead-bolts
- Hold-open device in the version 43725
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the dead-bolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

FUNCTION TYPE A

- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt
- Outside:
 - Key to operate the latch and the dead-bolt

FUNCTION TYPE D

- Inside:
 - Panic exit device to open
 - key to close with the dead-bolt
- Outside:
 - Key to close with the dead-bolt
 - The handle can operate the latch bolt, with the dead-bolt withdrawn


FUNCTION TYPE B

- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch bolt
- Outside:
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch bolt

8	3	2	92	24	30	3,440	1	1	43825 30 0
8	3	2	92	24	35	3,440	1	1	43825 35 0
8	3	2	92	24	40	3,440	1	1	43825 40 0
8	3	2	92	24	45	3,440	1	1	43825 45 0

8	3	2	92	24	30	3,440	1	1	43835 30 0
8	3	2	92	24	35	3,440	1	1	43835 35 0
8	3	2	92	24	40	3,440	1	1	43835 40 0
8	3	2	92	24	45	3,440	1	1	43835 45 0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x3 mm - height 2,300 mm
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral dead-bolts
- Hold-open device in the version 43725
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the dead-bolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

• FUNCTION TYPE A

- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt
- Outside:
 - Key to operate the latch and the dead-bolt

FUNCTION TYPE D

- Inside:
 - Panic exit device to open
 - key to close with the dead-bolt
- Outside:
 - Key to close with the dead-bolt
 - The handle can operate the latch bolt, with the dead-bolt withdrawn

8	1	2	92	24	30	0,770	1	1	43225 30 0
8	1	2	92	24	35	0,800	1	1	43225 35 0
8	1	2	92	24	40	0,830	1	1	43225 40 0
8	1	2	92	24	45	0,860	1	1	43225 45 0

• FUNCTION TYPE B

- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch bolt
- Outside:
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch bolt

8	1	2	92	24	30	0,770	1	1	43235 30 0
8	1	2	92	24	35	0,800	1	1	43235 35 0
8	1	2	92	24	40	0,830	1	1	43235 40 0
8	1	2	92	24	45	0,860	1	1	43235 45 0

• FUNCTION TYPE C


- Inside:
 - Panic exit device to open
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch
- Outside:
 - Key to close with the dead-bolt and enable/disable the outside handle to operate the latch
 - The handle is always enabled while the key is in the hole, the handle is disabled when the key is removed

8	1	2	92	24	30	0,770	1	1	43236 30 0
8	1	2	92	24	35	0,800	1	1	43236 35 0
8	1	2	92	24	40	0,830	1	1	43236 40 0
8	1	2	92	24	45	0,860	1	1	43236 45 0

WHILE STOCK LASTS
Replaced by 43661 30 0

WHILE STOCK LASTS
Replaced by 43661 45 0

WHILE STOCK LASTS
Replaced by 43661 40 0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
										Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> • SECONDARY DOOR SAFETY LOCK FOR USE WITH PANIC FUNCTION MULTIPOINT LOCKS • A lock series 43725/43735/43835/43225/43235/43236 is installed on the primary door • Stainless steel faceplate 24x3 • Extended bolt connector adjustable by 20 mm in the horizontal direction • Deadbolt feeler pin adjustable by 5.5 mm • Automatic or manual extended bolt closing • No. 1 5mm nylon spacer for profiles type "R" and no. 2 3mm nylon spacers for "DOOR" type profiles • Teflon-coated floor striker item 1.06142.85.0 • Safety lock fixing screws • Instruction sheet • FUNCTIONS • Inside: <ul style="list-style-type: none"> - With panic exit device • Outside: <ul style="list-style-type: none"> - No operation • ON REQUEST: <ul style="list-style-type: none"> - Threaded internal extended bolts item 1.07088-03-0 • Fast Push panic exit devices series 59607 + bar series 07007 or Fast Touch panic exit devices item 1.59711.00/01-0 • Automatic device for extended bolt closure restoring item 1.07089.52-0 complete with spacers item 1.06141-81-0 (1 2 mm spacer and 1 2.5 mm spacer) and with top nylon striker item 1.06141-80-0 • Square spindle 8 mm item 1.7206.00.0 (L=100 mm) • Kit of spacers for safety lock item 1.06141-88-0 	8	2	24	30	0,875	1	1	43295 30 0						
	8	2	24	40	0,940	1	1	43295 40 0						
	8	2	24	60	1,100	1	1	43295 60 0						
	8	2	24	75	1,100	1	1	43295 75 0						



Technical features:

- Zinc-plated steel faceplate
- Zinc-plated steel case
- Nickel-plated steel reversible latch
- Single throw (15 mm.) nickel-plated dead-bolt
- To be coupled with panic exit devices series 59607 and 59711-10/11-0
- Not compatible with lock series 43295

Supplied as standard:

- Spacer 8 mm (3 mm 2 pcs, 2 mm 1 pcs)
- Pair of nylon rose item 1.06012.01.0
- Fixing screws for cylinders and roses
- Instruction sheet

On request:

- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179) Handle item 1.07070.66.0.B1

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209


Hand:
0 = Non-handed

Cylinder to be ordered separately



Sicur Panic

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
										Type	Dim. Hand	Fin.	Pers. Spec.



- FOR 1- AND 2-LEAF DOORS
- Faceplate 22x3 mm
- Latch and dead-bolt
- FUNCTION TYPE A
- Inside:
Panic exit device to open
Key to close with the dead-bolt
- Outside:
Key to operate latch and dead-bolt

8 1 1 92 22 25 0,680 1 1 43250 25 0

WHILE STOCK LASTS
Replaced by 43650 25 0

- FUNCTION TYPE B
- From inside:
Panic exit device to open
Key to close with dead-bolt and activate or deactivate the outside handle for latch operation
- From outside:
key to close with dead-bolt and activate or deactivate the outside handle for latch operation

8 1 1 92 22 25 0,680 1 1 43260 25 0

WHILE STOCK LASTS
Replaced by 43660 25 0

- FUNCTION TYPE C
- From inside:
Panic exit device to open
Key to close with dead-bolt and activate the outside handle for latch operation
- From outside:
Key to close with dead-bolt and activate the outside handle for latch operation

8 1 1 92 22 25 0,680 1 1 43261 25 0

WHILE STOCK LASTS
Replaced by 43661 25 0

- FUNCTION TYPE D
- From inside:
Panic exit device to open
Key to close with dead-bolt
- From outside:
Key to close with dead-bolt. The handle is activated by latch operation, with the dead-bolt withdrawn

8 1 1 92 22 25 0,680 1 1 43262 25 0

WHILE STOCK LASTS
Replaced by 43662 25 0



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric striker series 15300

- For additional locking points
Diverting devices item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06220.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-10/11
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209


Hand:
0 = Non-handed

Cylinder to be ordered separately



Exitlock

Type	Description	DEAD-BOLTS								ITEM	
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand Fin. Pers. Spec.



- Deadbolt and latch
- Pre-arranged for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt.

4	3,5	27	2	85	64	2,650	1	1	56917	27	0
4	3,5	28	2	85	64	2,650	1	1	56917	28	0
3	3,5	38	2	85	64	2,650	1	1	56917	38	0
4	3,5	27	2	85	64	2,550	5	1	56917	47	0
4	3,5	28	2	85	64	2,550	5	1	56917	48	0
3	3,5	38	2	85	64	2,550	5	1	56917	58	0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt. When the dead-bolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	3,5	27	2	85	64	2,650	1	1	56916	27	0
4	3,5	28	2	85	64	2,650	1	1	56916	28	0
3	3,5	38	2	85	64	2,650	1	1	56916	38	0
4	3,5	27	2	85	64	2,550	5	1	56916	47	0
4	3,5	28	2	85	64	2,550	5	1	56916	48	0
3	3,5	38	2	85	64	2,550	5	1	56916	58	0



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel faceplate
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300

- For additional locking points
Diverting devices item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06221.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-10/11
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209


Hand:
0 = Non-handed

Cylinder to be ordered separately



Exitlock

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim. Hand	Fin.



- Deadbolt and latch
- Pre-setting for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt.

4	28	2	85	35	67	2,800	1	1 56937 28 0
4	28	2	85	35	67	2,650	5	1 56937 48 0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the dead-bolt
- Outside:
The key to close with the dead-bolt. When the dead-bolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	28	2	85	35	67	2,800	1	1 56936 28 0
4	28	2	85	35	67	2,650	5	1 56936 48 0



Technical features:

- Laquered polished brass removable faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated silent action latch
- Nickel-plated bolt for latch dead-locking (if provided)
- Nickel-plated cut-resistant dead-bolt, with a 25 mm. protrusion
- Anti-corrosion galvanised internal components

Supplied as standard:

- Striking plate
- Fixing screws
- Instruction sheet

On request:

- Satin stainless steel faceplate and striker (fin 20)

- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179)
- Handle series 30200

Standards:


- Locks with satin stainless steel faceplate and striker (finish 20), are certified fire-resistant by the American Underwrite Laboratories (UL LISTED R 14945(N))
- CE mark in compliance with the directive 89/106/CEE, only for item with (fin. 20)
- Standard reference:
 - UNI EN 179
 - UNI EN 1125
 - UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate Backset	Kg	Pieces	ITEM			
							Type	Dim. Hand	Fin.	Pers. Spec.




- FUNCTION TYPE B:
- Latch only with antipicking device
- Split square spindle
- Reversible panic function
- The outside handle can be deactivated with the key
- Outside: the latch can be operated with the handle, the key activates/deactivates the handle
- Inside: the latch can be operated with the handle or the panic exit device, the key activates/deactivates the outside handle
- Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains deactivated after the door is closed (in stand-by)

85	22	60	0,900	1	1	52760 60 0
85	22	70	1,000	1	1	52760 70 0
85	22	80	1,050	1	1	52760 80 0
85	22	90	1,050	1	1	52760 90 0








- FUNCTION TYPE B:
- Latch only with antipicking device
- Split square spindle
- Reversible panic function
- The outside handle can be deactivated with the key
- Outside: the latch can be operated with the handle, the key activates/deactivates the handle
- Inside: the latch can be operated with the handle or panic exit device, the key activates/deactivates the outside handle
- Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains deactivated after the door is closed (in stand-by)

85	22	60	0,885	1	1	52761 60 0
85	22	70	1,000	1	1	52761 70 0
85	22	80	1,050	1	1	52761 80 0
85	22	90	1,100	1	1	52761 90 0



- FUNCTION TYPE A:
- Through square spindle
- The deadbolt is automatically released when closing the door
- Outside: latch and dead-bolt are operated only with the key
- Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device

1	85	22	60	0,950	1	1	52840 60 0
1	85	22	70	1,000	1	1	52840 70 0
1	85	22	80	1,050	1	1	52840 80 0
1	85	22	90	1,100	1	1	52840 90 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim. Hand	Fin.	Pers. Spec.		
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • Through square spindle • The deadbolt is automatically released when closing the the door • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52860	60	0		
		1	85	22	70	1,000	1	1	52860	70	0		
		1	85	22	80	1,050	1	1	52860	80	0		
		1	85	22	90	1,100	1	1	52860	90	0		
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • Latch and dead bolt with antipicking device • Through square spindle • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52842	60	0		
		1	85	22	70	1,000	1	1	52842	70	0		
		1	85	22	80	1,050	1	1	52842	80	0		
		1	85	22	90	1,100	1	1	52842	90	0		
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • Latch and dead bolt with antipicking device • Through square spindle • Outside: latch and dead-bolt are operated only with the key • Inside: latch and dead-bolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52862	60	0		
		1	85	22	70	1,000	1	1	52862	70	0		
		1	85	22	70	1,050	1	1	52862	80	0		
		1	85	22	90	1,110	1	1	52862	90	0		
	<ul style="list-style-type: none"> • FUNCTION TYPE D: • Split square spindle • Reversible panic function • Outside:the latch can be operated with the handle • Inside: latch and dead-bolt are operated with the handle or the panic exit device • The key operates only the dead-bolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the dead-bolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52844	60	0		
		1	85	22	70	1,000	1	1	52844	70	0		
		1	85	22	80	1,050	1	1	52844	80	0		
		1	85	22	90	1,100	1	1	52844	90	0		
	<ul style="list-style-type: none"> • FUNCTION TYPE D: • Split square spindle • Reversible panic function • Outside:the latch can be operated with the handle • Inside: latch and dead-bolt are operated with the handle or the panic exit device • The key operates only the dead-bolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the dead-bolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52864	60	0		
		1	85	22	70	1,000	1	1	52864	70	0		
		1	85	22	80	1,050	1	1	52864	80	0		
		1	85	22	90	1,100	1	1	52864	90	0		



Technical features:

- Satin lacquered brass faceplate and striker
- Semi-matt black lacquered steel case
- Reversible, nickel-plated latch
- Nickel-plated, antipicking bolt (if provided)
- Nickel-plated dead-bolt
- Can be fitted with: escutcheons, roses, handle plates and through screws
- Through-spindle

Supplied as standard:

- Striker
- Striker and cylinder fixing screws

On request:

- Satin lacquered chrome-plated finish (fin. 18)
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179) Handle series 30200

Standards:


- Standard reference
- UNI EN 179
- UNI EN 1129
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- FUNCTION TYPE A:
- Dead-bolt and dead-locking latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06106.01.0
- ON REQUEST:
Faceplate 18x240 (pers. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1	52810 40 1				
1	85	22	40	0,720	1	1	52810 40 2				
1	85	22	45	0,760	1	1	52810 45 0				
1	85	22	50	0,780	1	1	52810 50 0				
1	85	22	60	0,840	1	1	52810 60 0				
1	85	22	70	0,920	1	1	52810 70 0				



- FUNCTION TYPE A:
- Dead-bolt and dead-locking latch
- SUPPLIED AS STANDARD:
Striking plate item 1.06106.05.0
- ON REQUEST:
Faceplate 18x240 (spec. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1	52830 40 1				
1	85	22	40	0,720	1	1	52830 40 2				
1	85	22	45	0,760	1	1	52830 45 0				
1	85	22	50	0,780	1	1	52830 50 0				
1	85	22	60	0,840	1	1	52830 60 0				
1	85	22	70	0,920	1	1	52830 70 0				



Technical features:

- Painted aluminum alloy/aluminum cover
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Finishes:

- STANDARD: Painted black

ON REQUEST:

- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- Painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Hand:

0 = Non-handed

Bar to be ordered separately




Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125


FAST Push

Type	Description	Spindle hole L	Unit weight Kg	Pieces	ITEM			
					Type	Dim. Hand	Fin.	Pers. Spec.




- Can be combined with panic function locks
- Satin finished PVD treated stainless steel

8/9	1,900	1	1 59607 10 0
8/9	1,650	1	1 59607 10 0 C2




- Black nylon casing
- Can be combined with panic function locks

8/9	92	1,350	1 59617 10 0
-----	----	-------	--------------



- Red painted steel oval shaped bar
- AVAILABLE FINISHES (extra price):
yellow painted (fin. 42)
green painted (fin. 43)
black painted (fin. 44)
white painted (fin. 45)
grey painted (fin. 97)
painted steel grey (fin. B9)

900	0,800	1	1 07007 13 0
1200	1,054	1	1 07007 14 0
1500	1,440	1	1 07007 15 0



- Stainless steel oval shaped horizontal bar

900	0,800	1	1 07007 60 0
1200	1,070	1	1 07007 61 0
1500	1,400	1	1 07007 62 0



FAST Touch

Technical features:

- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Standards:

- Cover: black bar: red




ON REQUEST

- (only item 1.59711-00/10-0):
- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: green bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

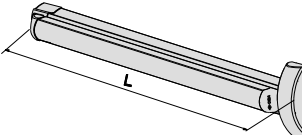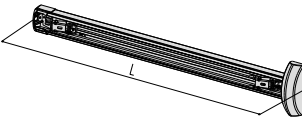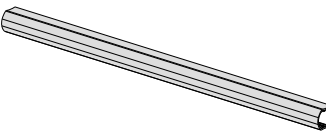Type	Description	Spindle hole	L	Unit weight	Pieces	ITEM					
						Type	Dim.	Hand	Fin.	Pers. Spec.	
 <ul style="list-style-type: none"> • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 • Satin finished PVD treated stainless steel • Can be combined with panic function locks series Exitlock and Sicur Panic • Satin finished PVD treated stainless steel 		8/9	1200	3,366	1	1	59711	00	0		
		8/9	840	2,592	1	1	59711	01	0		
		8/9	1200	3,366	1	1	59711	00	0	C2	
		8/9	1200	3,360	1	1	59711	10	0		
		8/9	840	2,592	1	1	59711	11	0		
		8/9	1200	3,366	1	1	59711	10	0	C2	
 <ul style="list-style-type: none"> • SUPPLIED WITHOUT PUSH BAR VERSION • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 • Can be combined with panic function locks series Exitlock and Sicur Panic 		8/9	1200	2,366	1	1	59711	00	0	00	SB
		8/9	1200	2,360	1	1	59711	10	0	00	SB
 <ul style="list-style-type: none"> • Bar • May be combined with panic exit devices series 1.59711.00.0.00.SB - 1.59711.10.0.00.SB • STANDARD FINISHES painted red • BAR COLOR OPTIONS: Satin finished anodized aluminium (fin. 62) Anodized bronze (fin. 64) Brass-plated (fin. A1) Matt black (fin. 00) Red (fin. 41) Yellow (fin. 42) Green (fin. 43) White (fin. 45) Grey (fin. 97) 				1,000	1	1	06196	43	0		



Technical features:

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:

- 8/9 mm square spindle.

On request:

- European profile cylinder.
- Timer item 1.07022.20.0.


Finishes:

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Hand:


0 = Non-handed

Type	Description	Faceplate	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.

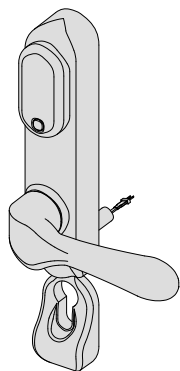

- Electrically enabled handle (A function only)
- Can be installed with locks series 43225, 43725, 43825, 52840, 52860, 52842, 52862, 52810, 52830, 56917, 56937
- Handle to cylinder distance 92 mm
- **STANDARD SUPPLY:**
Connecting cable
Fixing screws
- **ON REQUEST:**
Timer device 07022.20.0

1,150 1 1 07074 71 0



- Multiple scale timer






0,100 1 1 07022 20 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,180	12	1	06463	16	0	
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,170	12	1	06463	17	0	
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: Nickel plated (fin. 12) 		0,230	12	1	06463	31	0	
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06463.18.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 		0,145	12	1	06463	32	0	
	<ul style="list-style-type: none"> • REPLACING ITEM 1.06463.14.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,158	12	1	06463	34	0	
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,122	12	1	06465	06	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,117	12	1	06465	07	0
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: Nickel plated (fin. 12) 		0,140	12	1	06465	21	0
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06465.02.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 		0,112	12	1	06465	22	0
	<ul style="list-style-type: none"> • REPLACING ITEM 1.06463.04.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 17300, 56300, 57300, 43700, 43800	0,125	12	1	06465	24	0
	<ul style="list-style-type: none"> • AS ABOVE • Stainless steel 		0,112	12	1	06465	25	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Nylon cover for thermal cut profiles • For outward opening doors 	1 06141 40 0, 1 06285 36 0, 1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0,	0,019	25	1	06141	79	0
	<ul style="list-style-type: none"> • Upper striker for extended bolt • Black nylon 	1 07089 52 0	0,022	25	1	06141	80	0
	<ul style="list-style-type: none"> • Nylon faceplate spacer 	43295	0,020	12	1	06141	88	0
	<ul style="list-style-type: none"> • Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm) 	1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0	0,019	25	1	06141	89	0
	<ul style="list-style-type: none"> • Pair of floor strikers 		0,060	12	1	06142	85	0
	<ul style="list-style-type: none"> • Stainless steel flat striking plate 24 x 1.5 mm. 		0,053	12	1	06461	07	0

Type	Description	For series/item	Unit weight Pieces	ITEM		
				Type	Dim. Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 1.5 mm. 		0,034 12	1	06461	12 0
	<ul style="list-style-type: none"> Stainless steel flat striker plate 36x2 mm for FORSTER "UNICO" 		0,080 12	1	06461	17 0
	<ul style="list-style-type: none"> Stainless steel flat striker plate 36x2 mm for FORSTER "UNICO" 		0,046 12	1	06461	22 0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm 		0,093 12	1	06461	30 0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm 		0,065 12	1	06461	34 0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 		0,098 12	1	06461	35 0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 		0,065 12	1	06461	39 0
	<ul style="list-style-type: none"> Thumb turn to install with SikurExit Finishes: nickel-plated, chrome-plated and satin finished For EN 179:2008 the handle item 1.07070.66.0.B1 should also be ordered 	43225, 43235, 43236, 43295, 43725, 43735, 43825, 43835	0,200 1	1	07070	56 0 B1
	<ul style="list-style-type: none"> Handle to install with SikurExit Finishes: nickel-plated, chrome-plated and satin finished For EN 179:2008 2 pieces should be ordered 	43225, 43235, 43236, 43295, 43725, 43735, 43825, 43835	0,400 1	1	07070	66 0 B1

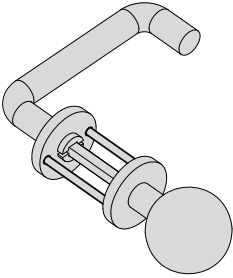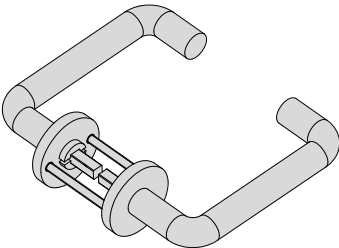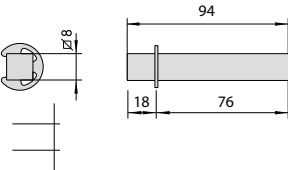Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Pair of handles to install with Exit lock • AVAILABLE FINISHES: Anodized bronze (fin. 00) Satin finished nickel plated chrome (fin. B1) 	56915, 56935	0,400	1	1	07070	50	0
	<ul style="list-style-type: none"> • Handle and fixed thumb turn to install with Exit lock • AVAILABLE FINISHES: Anodized bronze (fin. 00) Satin finished nickel plated chrome (fin. B1) 	56916, 56917, 56936, 56937	0,400	1	1	07070	60	0
	<ul style="list-style-type: none"> • Black painted inside plate • Can be installed with panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,106	6	1	07076	70	0
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 		0,106	6	1	07076	70	0 C2
	<ul style="list-style-type: none"> • Black painted inside plate • Can be installed with mortice version panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,106	6	1	07076	71	0
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 		0,106	6	1	07076	71	0 C2
	<ul style="list-style-type: none"> • Steel split splindle 		0,100	1	1	07085	77	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated extended bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 		0,600 12	1	07088	03	0
	<ul style="list-style-type: none"> • Steel dogging device, complete with: Spacers item 1.06141.81.0 Upper striker item 1.06141.80.0 	43295	0,060 1	1	07089	52	0
	<ul style="list-style-type: none"> • Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) L=72 (dim. 61) L=85 (dim. 62) L=92 (dim. 63) 		0,110 6	1	07176	61	0
			0,110 6	1	07176	62	0
			0,110 6	1	07176	63	0
		<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	0,110 6	1	07176	61	0 C2
			0,110 6	1	07176	62	0 C2
			0,110 6	1	07176	63	0 C2
	<ul style="list-style-type: none"> • Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,110 6	1	07176	66	0
		<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	0,110 6	1	07176	66	0 C2
	<ul style="list-style-type: none"> • Steel split splindle 		0,050 6	1	07206	00	0



CISA

Panic exit devices,
rim version



With CISA FAST, installation times are reduced by half

- Quick installation on support plates.
- Innovative system for additional lock coupling and adjustment by flexible steel cables.
- Clip-on covers for quick installation without fixing screws.



FAST Push

Technical features:

- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy self-locking latchbolt.

Supplied as standard:

- Special strikers
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- External drives
- Extended bolts
- Version with microswitch (spec. LA)
- Version with hold open device (spec. FG)
- Fire door version with steel latchbolt (FR spec.).

Finishes:

- STANDARD:
- Painted black
- ON REQUEST (only item 1.59011.10.0):
- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- Painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Hand:
0 = Non-handed


Bar to be ordered separately



Standards:


- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Type	Description	Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.




- Dead-locking lateral latch bolt
- SUPPLIED AS STANDARD:
Striker item 1.07072.20.0
- ON REQUEST:
Striker item 1.07072.21.0 outside operation devices item 1.07078.28/29 1.07077.46/47/48/49

2,150 1 1 59001 10 0



- MODULAR VERSION
- Dead-locking lateral latch bolt with override option
- SUPPLIED AS STANDARD:
Striker item 1.07072.20.0
- Can be combined with:
Pair of top/bottom latch bolts item 1.07063.61.0
Pair of lateral latch bolts item 1.07063.51.0
Pair of top/lateral latch bolts item 1.07063.66.1/2
Pair of top/bottom dead-bolts item 1.07063.71.0
- ON REQUEST:
Striker item 1.07072.21.0
Outside operation devices item 1.07078.28/29.0, 1.07077.46/47/48/49.0

2,200 1 1 59011 10 0



- MODULAR VERSION WITHOUT CENTRAL latch bolt
- Can be used with:
Pair of top/bottom latch bolts item 1.07063.61.0
Pair of lateral latch bolts item 1.07063.51.0
Pair of top/lateral latch bolts item 1.07063.66.1/2
Pair of top/bottom dead-bolts item 1.07063.71.0
- ON REQUEST:
Striker item 1.07072.21.0
Outside operation devices item 1.07078.28/29.0, 1.07077.46/47/48.0

2,050 1 1 59016 10 0



Technical features:

- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Chrome aluminum alloy self-locking latchbolt

Supplied as standard:

- Special strikers
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- External drives
- Extended bolts
- Version with microswitch (spec. LA)
- Version with hold open device (spec FG).
- Fire door version with steel latchbolt (FR spec.).

Finishes:

- STANDARD: Cover: black bar: red

ON REQUEST (only item 1.59811-10-0):

- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: green bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)



Standards:




- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:

0 = Non-handed

FAST Touch

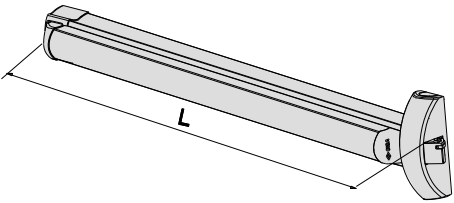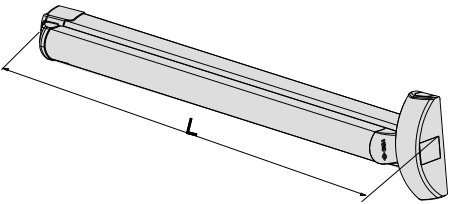Type	Description	L	Unit weight	Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
 <ul style="list-style-type: none"> • Dead-locking lateral latch bolt • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.28/29.0, 1.07077.46/47/48/49.0 	1200	3,700	1	1	59801	10	0			
	840	2,684	1	1	59801	11	0			
 <ul style="list-style-type: none"> • MODULAR VERSION • Dead-locking lateral latch bolt with override option • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom dead-bolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.28/29.0, 1.07077.46/47/48/49.0 	1300	3,760	1	1	59811	09	0			
	1200	3,472	1	1	59811	10	0			
	840	3,000	1	1	59811	11	0			
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	1200	3,750	1	1	59811	10	0	C2	
	840	2,684	1	1	59811	11	0	C2		

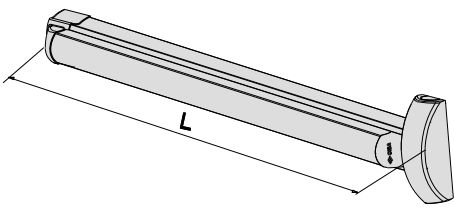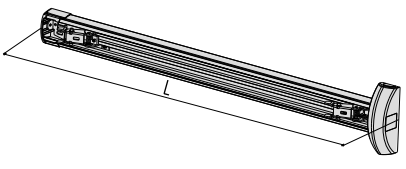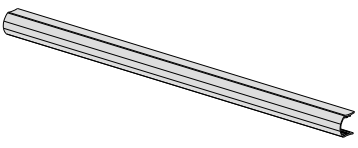Type	Description	L	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • MODULAR VERSION WITHOUT CENTRAL latch bolt • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom dead-bolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.28/29.0, 1.07077.46/47/48.0 	1200	3,500	1	1	59816	10	0	
		840	3,000	1	1	59816	11	0	
	<ul style="list-style-type: none"> • MODULAR VERSION WITHOUT BAR • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom dead-bolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.28/29.0, 1.07077.46/47/48.0 	1200	2,472	1	1	59811	10	0	00 SB
	<ul style="list-style-type: none"> • Bar • May be combined with panic exit devices series 1.59811.10.0.00.00.SB • STANDARD FINISHES painted red • BAR COLOR OPTIONS: Satin finished anodized aluminium (fin. 62) Anodized bronze (fin. 64) Brass-plated (fin. A1) Red (fin. 41) Yellow (fin. 42) Green (fin. 43) White (fin. 45) Grey (fin. 97) Steel grey (B9) 	1,000		1	1	06196	43	0	



FAST Push-pad

Technical features:

- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy latchbolt

Supplied as standard:

- Special strikers
- Fixing screws
- Installation and maintenance Instructions

On request:

- External drives
- Extended bolts
- Version with hold open device (spec FG).
- Fire door version with steel latchbolts (FR spec.).

Finishes:

- STANDARD:
Painted black

• ON REQUEST (only item 1.59061.10.0):

- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2) item 1.59061.10.0

Hand:
0 = Non-handed

Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Type	Description	Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Dead-locking lateral latch bolt • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.28/29, 1.07077.46/47/48/49 	0,900	1	1	59051	10	0	
	<ul style="list-style-type: none"> • MODULAR VERSION • Dead-locking lateral latch bolt with override option • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom dead-bolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.28/29 1.07077.46/47/48 	1,020	1	1	59061	10	0	
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	0,860	1	1	59061	10	0	C2
	<ul style="list-style-type: none"> • MODULAR VERSION WITHOUT CENTRAL latch bolt • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom dead-bolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.28/29 1.07077.46/47/48/49 	0,860	1	1	59066	10	0	



Technical features:

- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy latchbolt
- Can be combined with the panic exit devices series FAST

Supplied as standard:

- Special strikers
- Fixing screws
- Installation and maintenance Instructions

On request:

- External drives
- Extended bolts
- Version with hold open device (spec FG).
- Fire door version with steel latchbolts (FR spec.).

Finishes:


- STANDARD:
- Painted black
- ON REQUEST:
- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- PVD treatment: satin-finished stainless steel (fin. C2)

Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125


Hand:
0 = Non-handed

Type	Description	For series/item	Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.








- Pair of latch bolts for lateral locking point
59011, 59016, 2,000 1 1 07063 51 0
59061, 59065,
59811, 59816
- SUPPLIED AS STANDARD:
strikers item 1.07072.20
2 flexible cables
2 cable covers
2 connecting plates
2 cable feedthrough hooks
- ON REQUEST
Striker item 1.07072.21.0

- Satin finished PVD treated stainless steel
59011, 59016, 2,100 1 1 07063 51 0 C2
59061, 59065,
59811, 59816



- Pair of dead-locking latch bolts for top/
bottom locking points
59011, 59016, 1,950 1 1 07063 61 0
59061, 59065,
59811, 59816
- SUPPLIED AS STANDARD:
Top strikers item 1.07072.20.0
Floor striker item 1.07072.27.0
2 flexible cables
2 cable covers
2 connecting plates
2 cable feedthrough hooks
- ON REQUEST
Striker item 1.07072.21.0

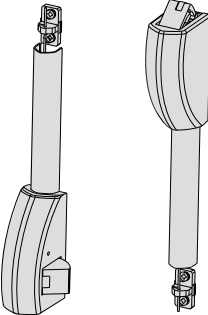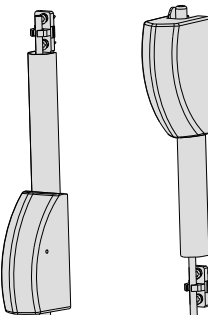- Satin finished PVD treated stainless steel
59011, 59016, 2,100 1 1 07063 61 0 C2
59061, 59065,
59811, 59816

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Pair of latch bolts for top dead-locking locking point and bottom lateral locking point • SUPPLIED AS STANDARD: striker item 1.07072.20 2 flexible cables 2 cable covers 2 connecting plates 2 cable feedthrough hooks • ON REQUEST Striker item 1.07072.21.0 	59011, 59016,	1,950	1	1	07063	66	1	
		59061, 59065, 59811, 59816	1,950	1	1	07063	66	2	
	<ul style="list-style-type: none"> • Pair of dead-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Top strikers item 1.07072.25.0 and item 1.07072.26.0 Floor striker item 1.07072.25.0 2 threaded bolts 2 bolt covers 2 bolt guide hooks 2 connecting plates 	59011, 59016,	2,100	1	1	07063	71	0	
		59061, 59065, 59811, 59816							
	<ul style="list-style-type: none"> • Additional lateral latch bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 	1 07063 51 0	0,600	1	1	07063	26	1	
			0,600	1	1	07063	26	2	
	<ul style="list-style-type: none"> • Top extended bolt kit complete with: Flexible cable Cable cover Cable feedthrough hook 	1 07063 51 0,	0,650	1	1	07064	51	0	
		1 07063 61 0, 1 07063 66 1							
	<ul style="list-style-type: none"> • Top extended bolt kit complete with: Threaded bolt Bolt cover Bolt guide hook 	1 07063 71 0	0,384	1	1	07064	71	0	
			0,384	1	1	07064	71	0	C2
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 								



Technical features:

- Steel case cover, painted black
- Chrome-plated aluminium alloy self-locking latch

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Microswitch version (spec. LA)
- Hold-open device version (spec. FG)
- Fire resistant version with steel latch (spec. FR)

Finishes:

- STANDARD:
 - painted black
- ON REQUEST:
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Hand:
0 = Non-handed

Bar to be ordered separately




series 07007

Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard


CISA Prestige

Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.




- Lateral latch-bolt
- SUPPLIED AS STANDARD:
Strikers item 1.07072.20.0
- ON REQUEST:
Outside operation devices item 1.07077.46/47/48/49.0

2,850 1 1 59301 10 0



- MODULAR VERSION
- Lateral latch-bolt which can be disactivated
- SUPPLIED AS STANDARD:
Strikers item 1.07072.20.0
- Can be used with:
 - Pair of top/bottom latch-bolts item 1.07063.30.0
 - Pair of lateral latch-bolts item 1.07063.20.0
 - Pair of top/lateral latch-bolts item 1.07063.35.1/2
 - Pair of top/bottom dead-bolts item 1.07063.40.0
- ON REQUEST:
Outside operation device item 1.07077.46/47/48/49.0

2,846 1 1 59311 10 0



- MODULAR VERSION
- Can be used with:
 - Pair of top/bottom latch-bolts item 1.07063.30.0
 - Pair of lateral latch-bolts item 1.07063.20.0
 - Pair of top/lateral latch-bolts item 1.07063.35.1/2
 - Pair of top/bottom dead-bolts item 1.07063.40.0
- ON REQUEST:
Outside operation device item 1.07077.46/47/48.0

2,666 1 1 59316 10 0



Technical features:

- Steel case cover, painted black
- Chrome-plated aluminium alloy latch bolt and dead bolt

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Fire resistant version with steel latch (spec. FR) art. 1.07063.20/30/35.0

Finishes:


- STANDARD:
 - painted black
- ON REQUEST:
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Hand:

- 0 = Non-handed
- 1 = R.H. outwards
- 2 = L.H. outwards


Type	Description	For series/item	Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Pair of latch-bolts for lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.20.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,062	1	1	07063	20	0		
	<ul style="list-style-type: none"> • Pair of dead-locking latch-bolts for top/bottom locking points • SUPPLIED AS STANDARD: upper strikers item 1.07072.20.0 Floor striker item 1.07072.28.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,000	1	1	07063	30	0		
	<ul style="list-style-type: none"> • Pair of latch-bolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.20.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,000	1	1	07063	35	1		
	<ul style="list-style-type: none"> • Pair of latch-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Upper strikers item 1.07072.25.0 and 1.07072.26.0 Floor striker item 1.07072.25.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,000	1	1	07063	40	0		
	<ul style="list-style-type: none"> • Additional lateral latch-bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 and 1.07072.21.0 	59311, 59316	0,300	1	1	07063	15	1		
			0,300	1	1	07063	15	2		

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.



- Set of extended bolts
- Black painted case cover
- To be used with latch-bolts item 1.07063.20/30/35/40.0

59311, 59316 1,220 1 1 07081 06 0



- Top extended bolt set
- Black painted case cover

07063 0,652 1 1 07064 60 0



Technical features:

- Stainless steel case cover
- Chrome-plated aluminium alloy self-locking latch with PVD coating.

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Microswitch version (spec. LA)
- Hold-open device version (spec. FG)
- Fire resistant version with steel latch (spec. FR)

Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:

0 = Non-handed


Bar to be ordered separately



series 07007


CISA Prestige Inox

Type	Description	Kg	Box	ITEM			
				Type	Dim.	Hand	Fin.




- Lateral latchbolt
- SUPPLIED AS STANDARD:
Strikers item 1.07072.70.0
- ON REQUEST:
Outside operation devices item 1.07077.46/47/48/49.0.C2

2,864 1 1 59351 10 0



- MODULAR VERSION
- Lateral latchbolt which can be disconnected
- SUPPLIED AS STANDARD:
Strikers item 1.07072.70.0
- Can be used with:
Pair of top/bottom latchbolts item 1.07063.31.0
Pair of lateral latchbolts item 1.07063.21.0
Pair of top/lateral latchbolts item 1.07063.36.0
Pair of top/bottom deadbolts item 1.07063.41.0
- ON REQUEST:
Outside operation device 1.07077.46/47/48.0.C2

3,002 1 1 59361 10 0



- MODULAR VERSION
- Can be used with:
Pair of top/bottom latchbolts item 1.07063.31.0
Pair of lateral latchbolts item 1.07063.21.02
Pair of top/lateral latchbolts item 1.07063.36.1/2
Pair of top/bottom deadbolts item 1.07063.41.0
- ON REQUEST:
Outside operation device 1.07077.46/47/48.0.C2

2,700 1 1 59366 10 0



Technical features:

- Stainless steel case cover
- Chrome-plated aluminium alloy latch bolt and dead bolt with PVD coating.

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Fire resistant version with steel latch (spec. FR)


Hand:


0 = Non-handed

1 = R.H. outwards

2 = L.H. outwards


Type	Description	For series/item	Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Pair of latch-bolts for lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.70.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,220	1	1	07063	21	0		
	<ul style="list-style-type: none"> • Pair of dead-locking latch-bolts for top/bottom locking points • SUPPLIED AS STANDARD: upper strikers item 1.07072.70.0 Floor striker item 1.07072.78.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,080	1	1	07063	31	0		
	<ul style="list-style-type: none"> • Pair of latch-bolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.70.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,000	1	1	07063	36	1		
	<ul style="list-style-type: none"> • Pair of latch-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Upper strikers item 1.07072.75.0 and 1.07072.76.0 Floor striker item 1.07072.75.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,000	1	1	07063	41	0		

Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.



- Stainless steel extended bolts
- To be used with latch-bolts item 1.07063.21/31/36/41.0

59361, 59366 1,196 1 1 07081 61 0



- Stainless steel top extended bolt set
- Stainless steel case cover

07063 0,500 1 1 07064 61 0



Technical features:

- Aluminium plate

Supplied as standard:


- Cylinders with 3 keys (where these are provided for)
- Fixing screws
- Instruction sheet

On request:

- Microswitch version item 1.07077.46/47/48/49.0 (spec. LA)

Hand:
0 = Non-handed

Type	Description	For series/item	Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.




- Plate with handle
- Painted black
- Handle disabling with key
- Cylinder item 1.02649.10.0.12
- FINISHES ON REQUEST:
 painted red (fin. 41)
 painted yellow (fin. 42)
 painted green (fin. 43)
 painted white (fin. 45)
 painted grey (fin. 97)
 painted steel grey (fin. B9)
- On request:
 Kit 1.06316.03.0 for plate installation on doors thicker than 70 mm (up to max thickness of 110mm)

59001, 59011, 0,780 1 1 07078 28 0
 59016, 59801,
 59811, 59816,
 59051, 59061,
 59066

- Satin finished PVD treated stainless steel

0,850 1 1 07078 28 0 C2



- Plate painted black
- Cylinder item 1.02649.11.0.12
- FINISHES ON REQUEST:
 painted red (fin. 41)
 painted yellow (fin. 42)
 painted green (fin. 43)
 painted white (fin. 45)
 painted grey (fin. 97)
 painted steel grey (fin. B9)

59001, 59051, 0,500 1 1 07078 29 0
 59801

- Plate with PVD satin finished stainless steel treatment

0,508 1 1 07078 29 0 C2

Type	Description	For series/item	Unit weight Kg	Pieces Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Plate with low profile handle • The handle is deactivated with the key • Cylinder item 1.0G304.02.0.12 • ON REQUEST: version with microswitch (LA spec.) • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) painted steel grey (fin. B9) 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	1,238	1	1	07077	46	0	
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	1,000	1	1	07077	46	0	C2
	<ul style="list-style-type: none"> • Plate with handle • Painted black • AVAILABLE FINISHES: red painted (fin. 41) yellow painted (fin. 42) green painted (fin. 43) white painted (fin. 45) grey painted (fin. 97) painted steel grey (fin. B9) 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	1,140	1	1	07077	47	0	
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	1,140	1	1	07077	47	0	C2
	<ul style="list-style-type: none"> • Plate with handle • Black painted • Handle deactivated by key • Cylinder item 1.0G304.02.0.12 • ON REQUEST: Version with microswitch car. (LA) • AVAILABLE FINISHES: red painted (fin. 41) yellow painted (fin. 42) green painted (fin. 43) white painted (fin. 45) grey painted (fin. 97) painted steel grey (fin. B9) 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	1,308	1	1	07077	48	0	
	<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	1,308	1	1	07077	48	0	C2
	<ul style="list-style-type: none"> • Black painted Plate • Cylinder item 1.0G304.09.0.12 • AVAILABLE FINISHES: red painted (fin. 41) yellow painted (fin. 42) green painted (fin. 43) white painted (fin. 45) grey painted (fin. 97) painted steel grey (fin. B9) 	59001, 59051, 59301, 59801	1,026	1	1	07077	49	0	
	<ul style="list-style-type: none"> • Satin finished PVD-treated stainless steel plate 	59001, 59051, 59301, 59801	1,026	1	1	07077	49	0	C2



Technical features:

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Powered through booster device
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:

- Cylinder item 1.0G304.02.0.12.
- Booster module item 1.07022.01.0.
- 8/9 mm square spindle.


On request:

- Timer item 1.07022.20.0

Finishes:

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Type	Description	Faceplate	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.



- Electrically enabled handle
- Can be installed with panic exit devices series FAST and Cisa Prestige
- Painted Black
- STD SUPPLY:
Booster device 1.07022.01.0
Connecting cable
fixing screws
- ON REQUEST:
Timer device 1.07022.20.0

1,200 1 1 07074 80 0



Technical features:

- To be coupled with panic exit devices with side latch
- Rated voltage :
 - 12 and 24 V ac CE
 - 12 and 24 V dc CE
- Zinc plated steel case
- Lacquered aluminium alloy casing
- Chrome-plated aluminium alloy striker

Supplied as standard:


- Nylon spacers item 1.7089.02.0
- Fixing screws
- Instruction sheet

Finishes:

- **STANDARD:**
 - black case casing
- **ON REQUEST:**
 - red case cover (fin. 41)
 - yellow case cover (fin. 42)
 - green case cover (fin. 43)
 - white case cover (fin. 45)
 - grey case cover (fin. 97)
- **PVD treatment:**
 - satin-finished stainless steel (fin. C2)


Type	Description	Facaplate	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 12 V ac CE - Current absorption 0,25A 	0,500	1	1	07083	15	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 12 V dc CE - Current absorption 0,2A 	0,500	1	1	07083	16	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 24 V ac CE - Current absorption 0,15A 	0,500	1	1	07083	17	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 1 microswitch • 12 V ac CE - Current absorption 0,25A 	0,500	1	1	07083	65	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 1 microswitch • 12 V dc CE - Current absorption 0,2A 	0,650	1	1	07083	66	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 1 microswitch • 24 V dc CE - Current absorption 0,15A 	0,500	1	1	07083	67	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 2 microswitches • 12 V dc CE - Current absorption 0,22A 	0,500	1	1	07083	76	0		
	<ul style="list-style-type: none"> • Without hold-open catch mechanism • 2 microswitches • 24 V dc CE - Current absorption 0,15A 	0,500	1	1	07083	77	0		
	<ul style="list-style-type: none"> • With hold-open catch mechanism • 12 V ac CE - Current absorption 0,25A 	0,628	1	1	07083	25	0		
	<ul style="list-style-type: none"> • With live coils • 12 V dc - Current absorption 0,2A 	0,634	1	1	07083	35	0		
	<ul style="list-style-type: none"> • With live coils • 24 V dc - Current absorption 0,15A 	0,500	1	1	07083	36	0		

Type	Description	L	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.



- Red painted steel oval shaped bar
- AVAILABLE FINISHES (extra price):
 - yellow painted (fin. 42)
 - green painted (fin. 43)
 - black painted (fin. 44)
 - white painted (fin. 45)
 - grey painted (fin. 97)
 - painted steel grey (fin. B9)

900	0,800	1	1 07007 13 0				
1200	1,054	1	1 07007 14 0				
1500	1,440	1	1 07007 15 0				



- Stainless steel oval shaped horizontal bar

900	0,800	1	1 07007 60 0				
1200	1,070	1	1 07007 61 0				
1500	1,400	1	1 07007 62 0				



Technical features:

- Steel plates


Supplied as standard:

- Fixing screws
- Installation and maintenance instruction sheet

Finishes:

- Black painted
- PVD treated satin lacquered stainless steel (fin. C2)

Type	Description	Unit weight	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.




- Glass Kit for FASTpanic exit devices
- Painted black

1,140 1 1 07090 01 0

- Glass Kit for FASTpanic exit devices
- Satin finished PVD-treated stainless steel

1,300 1 1 07090 01 0 C2

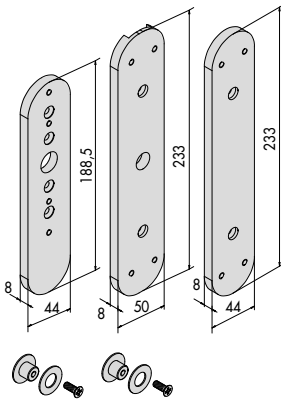


- Kit Glass for CISA Prestige panic exit devices
- Black painted

0,200 1 1 07090 05 0

- Kit Glass for CISA Prestige panic exit devices
- PVD treated satin lacquered stainless steel

1,850 1 1 07090 05 0 C2









- Glass Kit for additional locking points
- For FAST and Cisa Prestige panic exit devices
- Painted black

2,580 1 1 07090 10 0

- Glass Kit for additional locking points
- For FAST and Cisa Prestige panic exit devices
- Satin finished PVD-treated stainless steel

2,600 1 1 07090 10 0 C2


Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Glass Kit for lateral striker • For FAST and Cisa Prestige panic exit devices • Painted black 	0,100	1	1	07091	01	0
	<ul style="list-style-type: none"> • Glass Kit for additional locking points For FAST and Cisa Prestige panic exit devices • Satin finished PVD-treated stainless steel 	0,100	1	1	07091	01	0 C2
	<ul style="list-style-type: none"> • Glass Kit for top striker latch bolt version • For FAST and Cisa Prestige panic exit devices additional locking points • Painted black 	0,100	1	1	07091	02	0
	<ul style="list-style-type: none"> • Glass kit for top striker latch bolt version • For additional locking points for FAST and Cisa Prestige panic exit devices • Satin finished PVD-treated stainless steel 	0,100	1	1	07091	02	0 C2
	<ul style="list-style-type: none"> • Glass Kit for top striker dead-bolt version • For FAST and Cisa Prestige panic exit devices additional locking points • Painted black 	0,100	1	1	07091	03	0

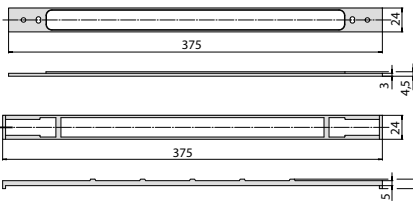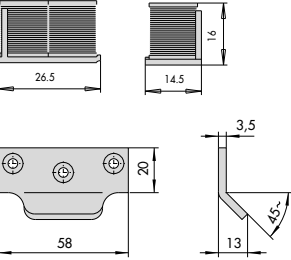Type	Description	For series/item	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> Nylon faceplate spacer 	43295	0,020	12	1	06141	88	0		
	<ul style="list-style-type: none"> Spacer for outside operation devices Black nylon pz. 1 S = 1,2 mm pz. 1 S = 3 mm pz. 1 S = 4 mm 	1 07077 28 0, 1 07077 29 0	0,019	1	1	06141	97	0		
	<ul style="list-style-type: none"> Microswitch to be used with outside operation devices item 1.07077.38.0, 1.07077.40.0, 1.07077.48, 1.07077.39.0, 1.07077.46.0 Microswitch to be used with panic exit devices series 59605, 59615 and FAST PUSH mortice version Microswitch to be used with outside operation devices item 1.07077.49.0 Microswitch to be used with FAST Touch panic exit devices, rim and mortice versions Microswitch to be used with FAST Push panic exit devices, rim version Microswitch to be used with panic exit devices series 59609, 59616, 59617 		0,020	1	1	06195	00	0		
			0,020	1	1	06195	01	0		
			0,020	1	1	06195	02	0		
			0,020	1	1	06195	05	0		
			0,020	1	1	06195	06	0		
			0,020	1	1	06195	09	0		
	<ul style="list-style-type: none"> Microswitch to be used with panic exit devices series PRESTIGE 		0,036	1	1	06195	07	0		
	<ul style="list-style-type: none"> Hold-open device 	59301, 59311, 59316, 59351, 59361, 59366	0,080	1	1	07065	52	0		
	<ul style="list-style-type: none"> Top and lateral striker with spacers Black painted steel 2x1,5 mm spacer 	59646	0,060	6	1	07072	11	0		

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Lateral striker for metal sections Black painted alloy 	07063, 59001, 59801	0,090 6	1	07072	14	0
	<ul style="list-style-type: none"> Black painted striker, complete with spacers 	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59011, 59016, 59311, 59316, 59801, 59811	0,160 1	1	07072	20	0
	<ul style="list-style-type: none"> Top lateral striker complete with spacers Stainless steel For stainless steel and C2 finish panic exit devices 	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59001, 59011, 59311, 59316, 59801, 59811	0,080 1	1	07072	70	0
	<ul style="list-style-type: none"> Black painted striker, complete with spacers 	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59011, 59016, 59311, 59316, 59801, 59811	0,190 1	1	07072	21	0
	<ul style="list-style-type: none"> Lateral and top angle striker complete with spacers Stainless steel For stainless steel and C2 finish panic exit devices 	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59001, 59011, 59311, 59316, 59801, 59811	0,186 1	1	07072	71	0
	<ul style="list-style-type: none"> Top/bottom striker Black painted striker, complete with spacers 	1 07063 40 0, 1 07063 71 0	0,080 1	1	07072	25	0
	<ul style="list-style-type: none"> Top/bottom striker Stainless steel For stainless steel and C2 finish panic exit devices 	1 07063 41 0, 1 07063 71 0	0,080 1	1	07072	75	0



Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Black painted striker, complete with spacers 	1 07063 40 0, 1 07063 71 0	0,080	1	1	07072	26	0
	<ul style="list-style-type: none"> • Angle striker • Stainless steel • For panic exit devices supplied with C2 finish and stainless steel 	1 07063 41 0, 1 07063 71 0	0,080	1	1	07072	76	0
	<ul style="list-style-type: none"> • Black painted steel floor striker, complete with spacers 	1 07063 30 0, 1 07063 61 0	0,080	1	1	07072	27	0
	<ul style="list-style-type: none"> • Top lateral striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices 	1 07063 31 0, 1 07063 61 0	0,080	1	1	07072	77	0
	<ul style="list-style-type: none"> • Black painted steel floor striker, complete with spacers 	1 07063 30 0, 1 07063 61 0	0,126	1	1	07072	28	0
	<ul style="list-style-type: none"> • Floor striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices 	1 07063 31 0, 1 07063 61 0	0,124	1	1	07072	78	0
	<ul style="list-style-type: none"> • Adjustable striker for ALUMINIUM DOORS • Adjustments: • Coplanarity compensation from -8mm to +4mm • Std supply • Fixing screws • Finishes: • Standard painted black • On request: • painted WHITE (fin.45) • painted GREY (fin.97) 		0,141	6	1	07072	31	0
	<ul style="list-style-type: none"> • Adjustable striker FOR INDUSTRIAL DOORS • Adjustments: • Clearance compensation between door wing and frame up to 25 mm • Coplanarity compensation from -4 mm to + 7mm • Std supply • Fixing screws • Finishes: • Standard painted black • On request: • painted WHITE (fin.45) • painted GREY (fin.97) 		0,080	6	1	07072	32	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.




- Adjustable striker for WOOD AND PVC DOORS
- Adjustments:
- Possible projecting installation on profiles with overlapping sections of 14 mm to 24 mm
- Std supply
- Fixing screws
- Finishes:
- Standard painted black
- On request:
- painted WHITE (fin.45)
- painted GREY (fin.97)

0,080 6 1 07072 33 0

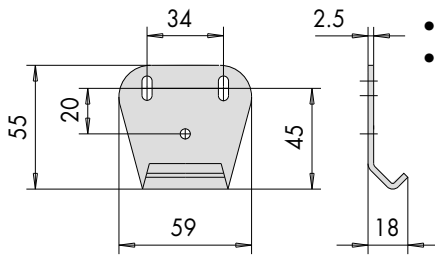

- Lateral and top striker for PVC doors
- Black painted steel


0,080 1 1 07072 34 0



- Outside plate
- Black painted steel
- Outside plate
- PVD treated satin lacquered stainless steel

59301,59311, 0,200 1 1 07077 14 0
59316

59351,59361, 0,200 1 1 07077 14 0 C2
59366




- Outside plate
- Black painted steel
- Outside plate
- PVD treated satin lacquered stainless steel

59301,59311, 0,200 1 1 07077 15 0
59316

59351,59361, 0,200 1 1 07077 15 0 C2
59366


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM 		0,808	1	1 07084 10 0				
	<ul style="list-style-type: none"> • Closing selector for double doors with door closer • Stainless steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard 		0,720	1	1 07084 20 0				
	<ul style="list-style-type: none"> • Adjustable closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM 		0,825	1	1 07084 11 0				
	<ul style="list-style-type: none"> • Adjustable closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard 		0,702	1	1 07084 21 0				
	<ul style="list-style-type: none"> • Spacer 2 mm. • Black nylon 	1 07083 15 0, 1 07083 16 0, 1 07083 17 0, 1 07083 65 0, 1 07083 66 0, 1 07083 67 0, 1 07083 76 0, 1 07083 77 0	0,020	1	1 07089 02 0				
	<ul style="list-style-type: none"> • Adapteur for round cylinder • For Cisa Prestige series panic exit devices 	59301, 59311, 59351, 59361	0,030	1	1 07165 21 0				
	<ul style="list-style-type: none"> • Hold-open device for use with FAST Push panic exit devices • painted red (fin. 41) • painted yellow (fin. 42) • painted green (fin. 43) • painted grey (fin. 97) 	59801, 59811, 59816	0,054	1	1 07165 50 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Hold-open device for use with FAST Push panic exit devices painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted grey (fin. 97) • Satin finished treated stainless steel 	59001, 59011, 59016	0,178	1	1 07165 51 0			
					<ul style="list-style-type: none"> • Satin finished PVD treated stainless steel 			
			0,178	1	1 07165 51 0 C2			

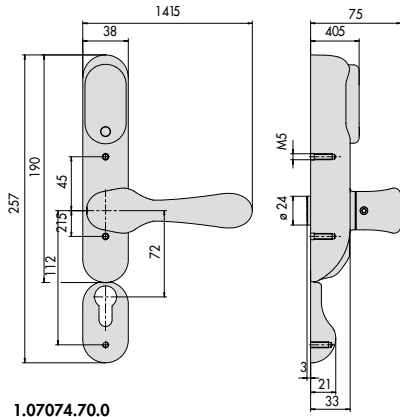


1.07074.70.0

1




1.07077.47

4

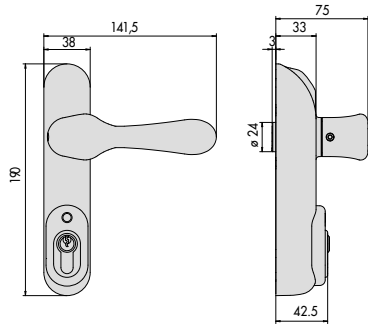


1.07074.80.0

2




1.07077.48

5




1.07077.46

3




1.07077.49


6

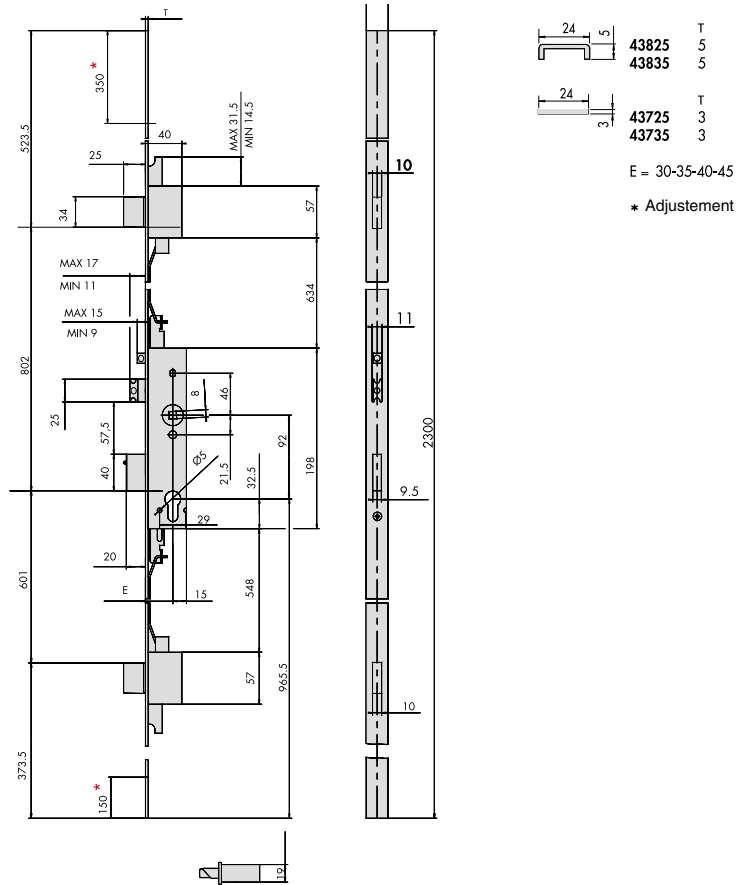


12

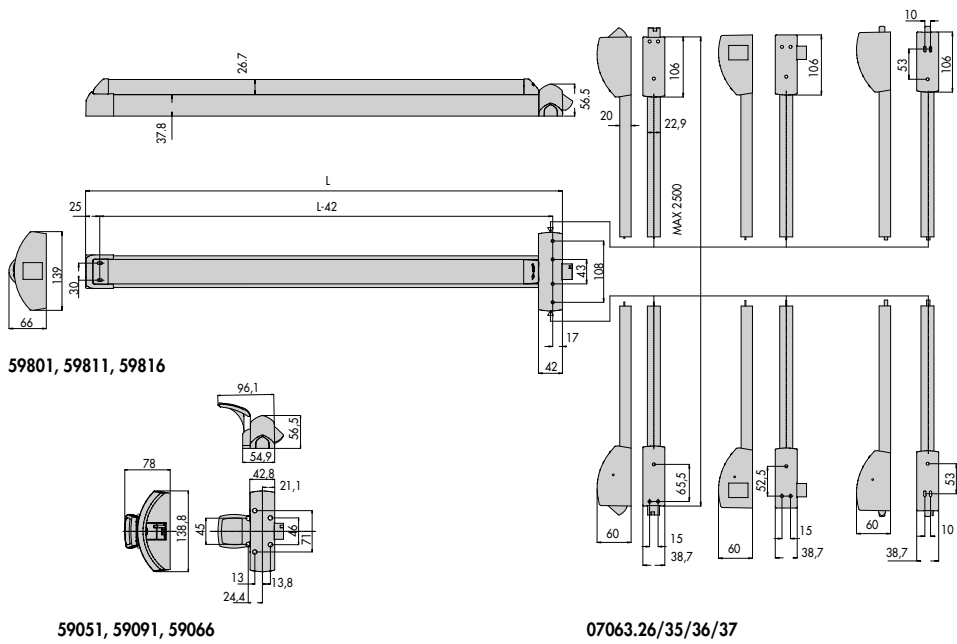

13

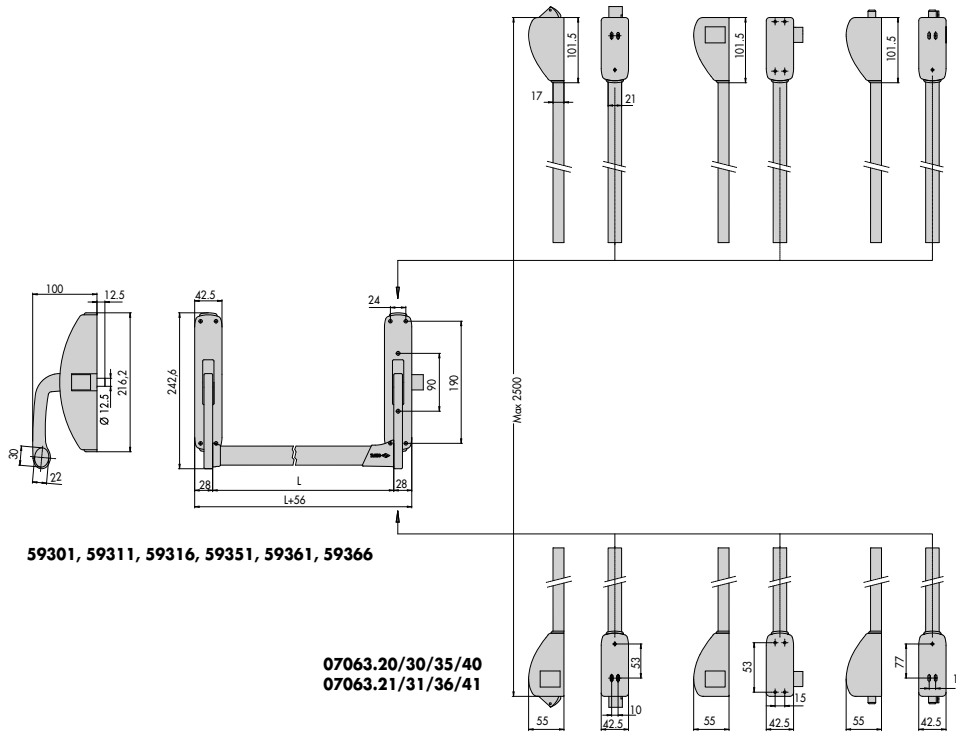


14

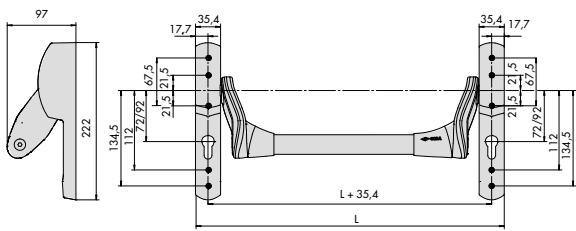


59607 - 59617

15

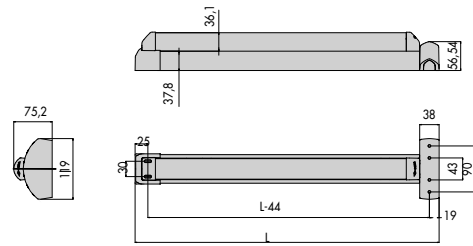

59711

16

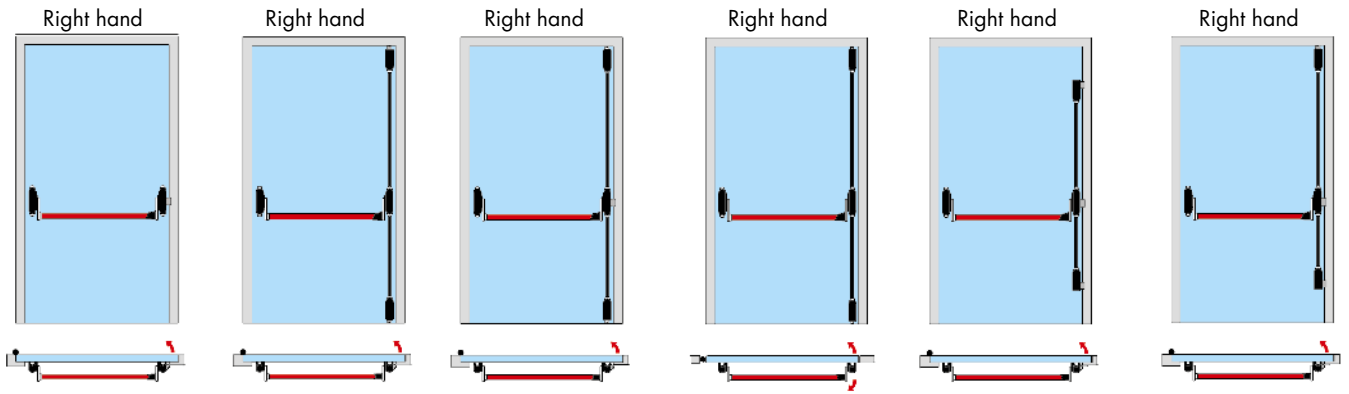

Series CISA PRESTIGE

59301
59351

Series FAST PUSH

59001
59011

Series FAST TOUCH

59801
59811

Series CISA PRESTIGE

59311+1-07063-30-0
59316+1-07063-30-0
59351+1-07063-31-0
59366+1-07063-31-0

Series FAST PUSH

59016+1-07063-61-0
59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0
59811+1-07063-61-0

Series CISA PRESTIGE

59311+1-07063-30-0
59351+1-07063-31-0

Series FAST PUSH

59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0

Series CISA PRESTIGE

59316+1-07063-40-0
59366+1-07063-41-0

Series FAST PUSH

59016+1-07063-71-0

Series FAST TOUCH

59816+1-07063-71-0

Series CISA PRESTIGE

59311+1-07063-20-0
59316+1-07063-20-0
59351+1-07063-21-0
59366+1-07063-21-0

Series FAST PUSH

59011+1-07063-51-0
59016+1-07063-51-0

Series FAST TOUCH

59811+1-07063-51-0
59816+1-07063-51-0

Series CISA PRESTIGE


59311+1-07063-35-1
59316+1-07063-35-1
59351+1-07063-36-1
59366+1-07063-36-1

Series FAST PUSH

59011+1-07063-66-1
59016+1-07063-66-1

Series FAST TOUCH

59811+1-07063-66-1
59816+1-07063-66-1

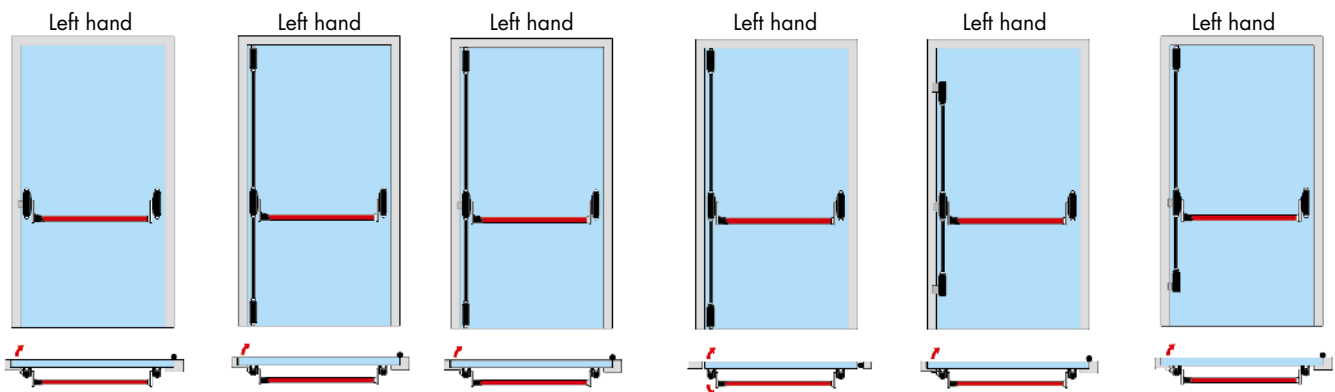

Series CISA PRESTIGE

59301
59351

Series FAST PUSH

59001
59011

Series FAST TOUCH

59801
59811

Series CISA PRESTIGE

59311+1-07063-30-0
59316+1-07063-30-0
59351+1-07063-31-0
59366+1-07063-31-0

Series FAST PUSH

59016+1-07063-61-0
59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0
59811+1-07063-61-0

Series CISA PRESTIGE

59311+1-07063-30-0
59351+1-07063-31-0

Series FAST PUSH

59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0

Series CISA PRESTIGE

59316+1-07063-40-0
59366+1-07063-41-0

Series FAST PUSH

59016+1-07063-71-0

Series FAST TOUCH

59816+1-07063-71-0

Series CISA PRESTIGE

59311+1-07063-20-0
59316+1-07063-20-0
59351+1-07063-21-0
59366+1-07063-21-0

Series FAST PUSH

59011+1-07063-51-0
59016+1-07063-51-0

Series FAST TOUCH

59811+1-07063-51-0
59816+1-07063-51-0

Series CISA PRESTIGE


59311+1-07063-35-2
59316+1-07063-35-2
59351+1-07063-36-2
59366+1-07063-36-2

Series FAST PUSH

59011+1-07063-66-2
59016+1-07063-66-2

Series FAST TOUCH

59811+1-07063-66-2
59816+1-07063-66-2

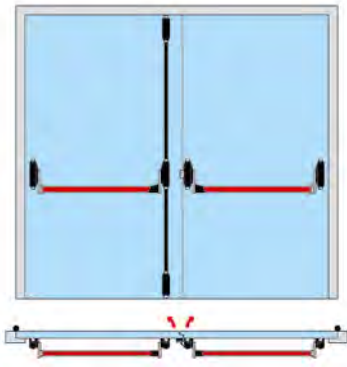

Series CISA PRESTIGE


59301 + 1-07063-30-0 + 59316
 59311 + 1-07063-30-0 + 59311
 59351 + 1-07063-31-0 + 59366
 59361 + 1-07063-31-0 + 59361

Series FAST PUSH

59016 + 1-07063-61-0 + 59001
 59011 + 1-07063-61-0 + 59011

Series FAST TOUCH

59816 + 1-07063-61-0 + 59801
 59811 + 1-07063-61-0 + 59816

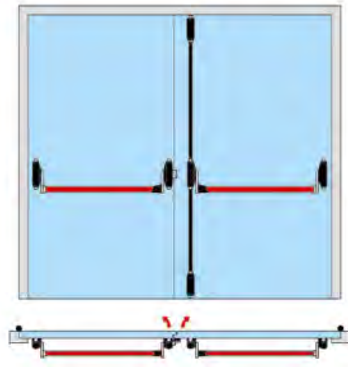

Series CISA PRESTIGE


59301 + 1-07063-30-0 + 59316
 59311 + 1-07063-30-0 + 59311
 59351 + 1-07063-31-0 + 59366
 59361 + 1-07063-31-0 + 59361

Series FAST PUSH

59001 + 1-07063-61-0 + 59016
 59011 + 1-07063-61-0 + 59011

Series FAST TOUCH

59801 + 1-07063-61-0 + 59816
 59811 + 1-07063-61-0 + 59816

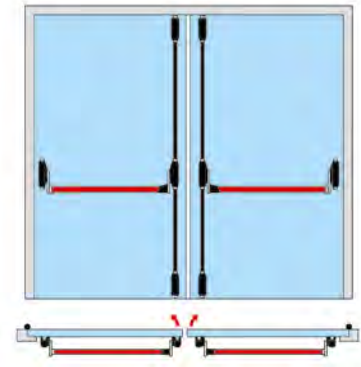

Series CISA PRESTIGE

59311+1-07063-30-0+59301+1-07063-30-0
 59316+1-07063-30-0+59316+1-07063-30-0
 59351+1-07063-31-0+59351+1-07063-31-0
 59366+1-07063-31-0+59366+1-07063-31-0


Series FAST PUSH

59011+1-07063-61-0+59001+1-07063-61-0
 59016+1-07063-61-0+59016+1-07063-61-0

Series FAST TOUCH

59811+1-07063-61-0+59811+1-07063-61-0
 59816+1-07063-61-0+59816+1-07063-61-0

Right hand Left hand

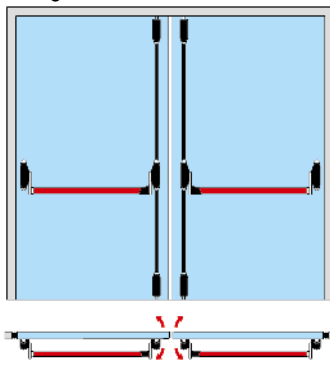

Series CISA PRESTIGE

59311+1-07063-40-0+59301+1-07063-40-0
 59361+1-07063-41-0+59366+1-07063-41-0


Series FAST PUSH

59011+1-07063-71-0+59001+1-07063-71-0
 59016+1-07063-71-0+59016+1-07063-71-0

Series FAST TOUCH

59811+1-07063-61-0+59811+1-07063-61-0
 59816+1-07063-61-0+59816+1-07063-61-0

Right hand Left hand

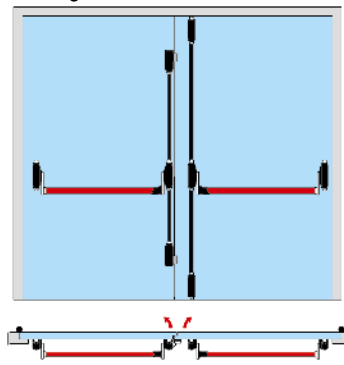

Series CISA PRESTIGE

59311+1-07063-30-0+59316+1-07063-20-0
 59351+1-07063-31-0+59366+1-07063-21-0


Series FAST PUSH

59011+1-07063-51-0+59016+1-07063-61-0

Series FAST TOUCH

59811+1-07063-51-0+59816+1-07063-61-0

Right hand Left hand

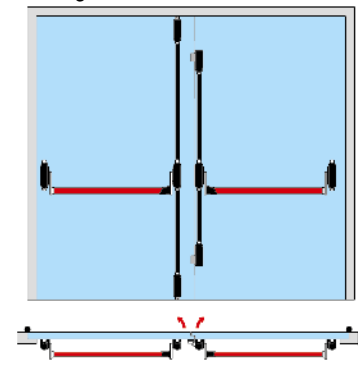

Series CISA PRESTIGE

59316+1-07063-30-0+59311+1-07063-20-0
 59366+1-07063-31-0+59361+1-07063-21-0

Series FAST PUSH

59016+1-07063-61-0+59011+1-07063-51-0

Series FAST TOUCH

59816+1-07063-51-0+59811+1-07063-61-0

NOTE:

Standard version CISA Panic exit devices can be installed on doors 70 mm max thickness, 2500 mm max height, 1300 mm max width.
 On request they are also available for larger size doors.



Door closers



Door closers 601/T series	501	Door closers 602 series	508
Door closers Smart Plus series	502	Accessories for door closers 601 series.....	510
Door closers Professional Plus series	503	Accessories for door closers Smart Plus and Professional Plus series	511
Cam action door closers D6200 series	505	Accessories for door closers 602 series	514
Cam action door closers D8200 series	506	Dimensional drawings	515
Door closers D7200 series	507		





Technical features:



- Solid cast iron body
- Steel arm, with or without hold open device
- ADJUSTMENTS:
Closing speed adjusting valve

Supplied as standard:

- Fixing screws
- Installation template

Finishes:

- The required finish must always be specified in the order
- Finishes available:
aluminium colour (fin. 97)
gold colour (fin. 98)

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM						
							Type	Dim.	Hand	Fin.	Pers.	Spec.	
 <ul style="list-style-type: none"> • Arm without hold-open device • Standard arm 		1	750	30	2,392	2	1	60130	01	0	98		
		2	830	45	3,167	2	1	60140	02	0	98		
		3	930	60	3,717	2	1	60150	03	0	98		
		4	1030	80	4,900	2	1	60160	04	0	98		
 <ul style="list-style-type: none"> • Arm with hold-open device • Hold open arm 		1	750	30	2,480	2	1	60131	01	0	98		
		2	830	45	3,205	2	1	60141	02	0	98		
		3	930	60	3,705	2	1	60151	03	0	98		
		4	1030	80	5,025	2	1	60161	04	0	98		



Smart Plus 2

Technical features:

- Steel arm with hold-open device.
- Solid body in die-cast aluminium alloy
- Rack-and-pinion mechanism in hardened steel for smooth, efficient operation
- Removable ABS cover

Operation:

- Multi-strength version with adjustable position of body and arm hinge mechanism, strength 2 and 3 (ENn54), strength 3 (CE)
- Independent closing speed and end stroke adjustment valves.
- Closing strength adjustable from 180° to 15° via the valve (1).
- End stroke adjustable from 15° to 0° via the valve (2).
- Adjustment of stop position up to 130° (function not suitable for fire doors)

Supplied as standard:



- Fixing screws
- Template and installation instructions

Finishes:

- Standard
 - Aluminium (fin. 97)
- Finish options
 - Champagne (fin. 87)
 - Brown (fin. 88)
 - Black (fin. 44)
 - Matt black (fin. 90)
 - White (fin. 45)

Standards:

- CE marking in accordance with
- (UE) no. 305/2011 regulation

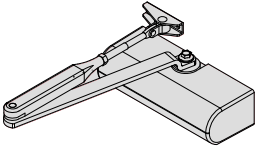Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM			
							Type	Dim.	Hand	Pers. Spec.
	<ul style="list-style-type: none"> • MULTISTRENGTH • Arm without hold open device • CE mark according to Directive 89/106/CEE 	3	950	60	1,800	1	1	C1415	03	0 97
	<ul style="list-style-type: none"> • MULTISTRENGTH • With hold open device on arm 	2-4	850-1100	40-80	1,800	1	1	C1416	03	0 97





Technical features:

- Adjustable steel arm with hold open device
- Solid aluminium body with slide-on cover

Operation:

- Closing strength:
- multiple strength version with adjustable position of body and arm hinge mechanism (C15 model)
- Adjustable strength version: adjusted via the screw on the body side (C16 and C21 models)
- Closing strength and end stroke adjustment valves for easier access. Valves protection cover to avoid any unauthorised adjustment
- Adjustable closing strength from 180° to 15° via the valve (closing)
- Adjustment of the end stroke from 15° to

0° via the valve (latch)

- Adjustable backcheck (opening brake) to reduce the risk of damaging the door and the adjacent walls
- Adjustment of stop position up to 130° (function not suitable for fire doors)

Supplied as standard:

- Fixing screws
- Template and installation instructions







Finishes:



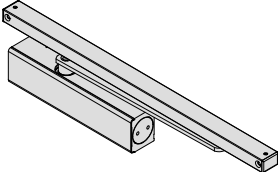
- SUPPLIED AS STANDARD:
 - Grey (fin. 97)
- FINISH OPTIONS:
 - Black (fin. 44)
 - White (fin. 45)
 - Champagne (fin. 87)
 - Brown (fin. 88)
 - Matt black (fin. 90)

Standards:

- CE marking in accordance with
- (UE) no. 305/2011 regulation

Professional Plus 2

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM				
							Type	Dim. Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • MULTISTRENGTH • Arm without hold open device 	2÷4	850÷1100	40÷80	2,300	1	1	C1510	03	0	97
	<ul style="list-style-type: none"> • MULTISTRENGTH • With hold open device on arm 	2÷4	850÷1100	40÷80	2,300	1	1	C1511	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Without hold-open • Backcheck 	2÷4	850÷1100	40÷80	3,100	1	1	C1610	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Arm with hold-open • Backcheck 	2÷4	850÷1100	40÷80	3,100	1	1	C1611	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Without hold-open • Backcheck 	2÷6	850÷1260	40÷120	3,500	1	1	C1610	05	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Arm with hold-open • Backcheck 	2÷6	850÷1250	40÷120	3,500	1	1	C1611	05	0	97

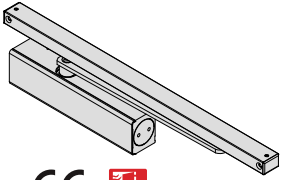Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
 	<ul style="list-style-type: none"> • Slide track • Arm with hold-open 	3	950	60	2,600	1	1	C2010	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH VERSION • Slide track • Without hold-open • Backcheck 	2÷4	850÷1100	40÷80	3,700	1	1	C2110	03	0	97



Technical features:

- Steel sliding arm with or without hold open device
- Cam operated.
- Adjustment valve with thermostatic device.

Operation:

- Adjustable closing speed and end stroke
- Backcheck
- Adjustable strength
- Backcheck (opening brake)

Supplied as standard:

- Screws
- Adhesive templates



Finishes:

- SUPPLIED AS STANDARD:
 - Aluminum (fin. 97)
- FINISH OPTIONS:
 - Black (fin. 44)
 - White (fin. 45)
 - Champagne (fin. 87)
 - Brown (fin. 88)
 - Matt black (fin. 90)

Standards:

- CE marking in compliance with EN 1154 standard

D6200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Standard track arm 	2÷4	1100	80	2,300	1	1	D6200	03	0	97	
	<ul style="list-style-type: none"> • For outward opening doors (door closer body installed on the door leaf and arm installed on the frame) • Standard track arm 	2÷4	1100	80	2,300	1	1	D6210	03	0	97	
	<ul style="list-style-type: none"> • Hold open unit for D6200 series 	-	-	-	-	1	1	07209	02	0		



Technical features:

- Cast iron pressed body
- Steel slider arm with or without stop
- Cam-controlled operation
- Adjustment valves with thermostatic device.

Operation:

- Adjustable closing speed and end stroke
- Adjustable strength

Supplied as standard:

- Screws
- Adhesive templates

Finishes:

- STANDARD:
- Aluminum (fin. 97)

Standards:

- CE mark according to the EN 1154 standard

D8200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin. Pers. Spec.	
	<ul style="list-style-type: none"> • For inward opening doors (door closer body mounted on the door leaf; slide track mounted on the door frame) • Without hold open device 	2-4	1100	80	1,900	1	1	D8200	03	0	97
	<ul style="list-style-type: none"> • Hold open device for D8200 series 	-	-	-	-	1	1	07209	00	0	
	<ul style="list-style-type: none"> • Hold-open device 	-	-	-	-	1	1	07209	01	0	
	<ul style="list-style-type: none"> • Protection kit for installation on fire doors 	-	-	-	-	1	1	07209	21	0	



Technical features:

- Cast iron pressed body
- Steel slider arm with or without stop
- Cam-controlled operation
- Adjustment valves with thermostatic device.

Operation:

- Closing rate
- End stroke
- Closure delay
- Opening brake
- Actuating force
- Stop position

Supplied as standard:

- Pre-assembly plate
- Screws
- Adhesive templates

Finishes:

- STANDARD:
 - Aluminum (fin. 97)
- FINISHING OPTIONS:
 - Black (fin. 44)
 - White (fin. 45)
 - Champagne (fin. 87)
 - Dark brown (fin. 88)
 - Dark bronze (fin. 99)
 - Satin-finished stainless steel (fin. C2)

Standards:

- CE mark according to the EN 1154 standard

D7200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM							
							Type	Dim.	Hand	Fin.	Pers.	Spec.		
	<ul style="list-style-type: none"> • For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Standard track arm 	2÷5	1250	100	6,000	1	1	D7200	04	0	97			
	<ul style="list-style-type: none"> • For outward opening doors (door closer body installed on the door arm installed on the frame) • Standard track arm 	2÷5	1250	100	6,000	1	1	D7210	04	0	97			
	<ul style="list-style-type: none"> • For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Hold open track arm 	2÷5	1250	100	6,000	1	1	D7201	04	0	97			
	<ul style="list-style-type: none"> • For outward opening doors (door closer body installed on the door frame and arm on the door leaf) • Hold open track arm 	2÷5	1250	100	6,000	1	1	D7211	04	0	97			



Technical features:

- Cast iron body
- Hardened steel camshaft
- Pressure relief valve
- ADJUSTMENTS:
Closing speed adjusting valve
Latch action adjusting valve









Supplied as standard:

- Steel wall case
- Template and installation instructions

On request:

- Covering plate item 1.07123.00.0
- OPTIONS (see relevant Catalogue section):
Personalized covering plate
Special camshaft
Hinge mechanism, without steel box

Type	Description	Stand open	Max. door weight	Max. door width	Unit weight	Pieces	ITEM				
							Type	Dim.	Hand	Pers. Spec.	
		100	900	5,950	1	1	60220	60	0		
		90	100	900	5,950	1	1	60221	60	0	
		105	100	900	5,950	1	1	60222	60	0	
		100	1100	5,950	1	1	1	60230	60	0	
		90	100	1100	5,950	1	1	1	60231	60	0
		105	100	1100	5,950	1	1	1	60232	60	0

Type	Description	Stand open	Max. door weight	Max. door width	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
		200	1300	5,950	1	1	60240	60	0		
		90	200	1300	5,950	1	1	60241	60	0	
		105	200	1300	5,950	1	1	60242	60	0	

Finishes:

- The required finish must always be specified in the order (where necessary)
- Finishes available:
aluminium colour (fin. 97)
gold colour (fin. 98)
dark bronze colour (fin. 99)






Type	Description	For series/item	L	Unit weight	Kg	Pieces	ITEM			
							Type	Dim.	Hand	Fin.
	• Steel arm without hold-open device	60130, 60170	200,0	0,420	1	1	07132	00	0	97
		60140, 60150, 60160, 60180, 60190	240,0	0,475	1	1	07134	00	0	97
	• Steel arm with hold-open device	60131, 60171	200,0	0,515	1	1	07133	00	0	97
		60141, 60151, 60161, 60181, 60191	240,0	0,595	1	1	07135	00	0	97

Finishes:


- The required finish must always be specified in the order (where necessary)
- Finishes available:
 - champagne colour (fin. 87)
 - dark brown colour (fin. 88)
 - aluminium colour (fin. 97)
 - black colour (fin. 44)
 - matt black colour (fin. 90)
 - dark bronze colour (fin. 99)
 - white (fin. 45)

Type	Description	Unit weight	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	• Steel angle backplate parallel arm steel angle backplate for C1415 and C1416 series	0,230	1	1	07141	01	0	97
	• Steel backplate door closers steel plate for C1510 03 and C1511 03 series		1	1	07142	01	0	97
	• Steel backplate door closers steel plate for C1510 03 and C1511 03 series		1	1	07153	02	0	97
	• Steel backplate door closers steel plate for C1610 03 and C1611 03 series		1	1	07153	03	0	97
	• Steel backplate door closers steel plate for C1610 03 and C1611 03 series		1	1	07153	04	0	97
	• Steel backplate door closers steel plate for C1610 05 and C1611 05 series		1	1	07153	05	0	97



Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Steel backplate door closers steel plate for C1610 05 and C1611 05 series 		1	1	07153	06	0	97
	<ul style="list-style-type: none"> • Steel sliding arm without hold-open device • For Smart Plus 2 door closers 	0,460	1	1	07155	10	0	97
	<ul style="list-style-type: none"> • Steel sliding arm with hold-open device • For Smart Plus 2 door closers 	0,460	1	1	07155	11	0	97
	<ul style="list-style-type: none"> • Steel sliding arm without hold-open device • For Smart Plus 2 Closing Force 3 door closers 	0,460	1	1	07155	12	0	97
	<ul style="list-style-type: none"> • Steel sliding arm without hold-open device • For Smart Plus 2 Closing Force 5 door closers 	0,460	1	1	07155	14	0	97
	<ul style="list-style-type: none"> • Steel sliding arm with hold-open device • For Smart Plus 2 Closing Force 3 door closers 	0,900	1	1	07155	13	0	97
	<ul style="list-style-type: none"> • Steel sliding arm with hold-open device • For Smart Plus 2 Closing Force 5 door closers 	0,900	1	1	07155	15	0	97

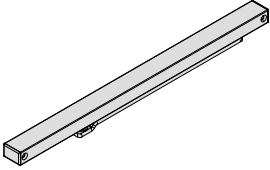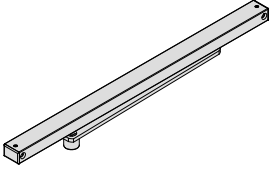Type	Description	 Unit weight	 Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Steel sliding arm with aluminium slide track • For Professional Plus 2 door closers, C2010 series 	0,700	1	1	07155	20	0	97
	<ul style="list-style-type: none"> • Steel sliding arm with aluminium slide track • For Professional Plus 2 door closers, C2110 series 	0,800	1	1	07155	21	0	97
	<ul style="list-style-type: none"> • Closer hold-open device with sliding arm for C2010 03 and C2011 03 series 			1	1	07210	01	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Bottom brass strap for swinging doors • AVAILABLE FINISHES: chrome plated (Fin. 18) 		0,310	1	1	07110	00	0	
	<ul style="list-style-type: none"> • Bottom brass strap for left opening doors • AVAILABLE FINISHES: chrome plated (Fin. 18) 		0,370	1	1	07111	00	2	
	<ul style="list-style-type: none"> • Bottom brass strap for right opening doors • AVAILABLE FINISHES: chrome plated (Fin. 18) 		0,360	1	1	07112	00	1	
	<ul style="list-style-type: none"> • Top brass hinge for single leaf doors • AVAILABLE FINISHES: chrome plated (Fin. 18) 		0,580	1	1	07113	00	0	
	<ul style="list-style-type: none"> • Top aluminium hinge for swinging doors 		0,190	1	1	07115	00	0	
	<ul style="list-style-type: none"> • Satin brass cover plate • ON REQUEST: • Personalised trademark 		0,380	1	1	07123	00	0	
	<ul style="list-style-type: none"> • Satin stainless steel cover plate • ON REQUEST: • Personalised trademark 		0,395	1	1	07124	00	0	
	<ul style="list-style-type: none"> • Lacquered steel wall case 		1,050	1	1	07124	50	0	

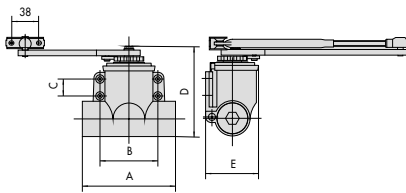


	A	B	C	D	E
1.60130.01	132	75,5	19	144	68
1.60131.01	132	75,5	19	144	68
1.60140.02	137	82	24	124	73
1.60141.02	137	82	24	124	73
1.60150.03	147	92	29	140	81
1.60151.03	147	92	29	140	81
1.60160.04	150	105	31	156	96
1.60161.04	150	105	31	156	96

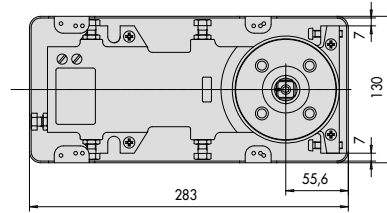

1.60220.60.0, 1.60221.60.0, 1.60222.60.0,
1.60230.60.0, 1.60231.60.0, 1.60232.60.0,
1.60240.60.0, 1.60241.60.0, 1.60242.60.0,


1

2

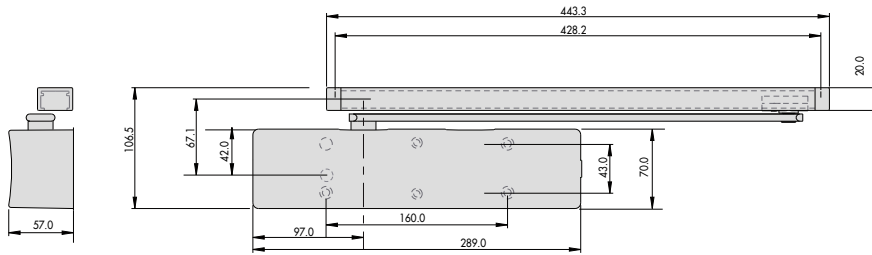


D7200

3

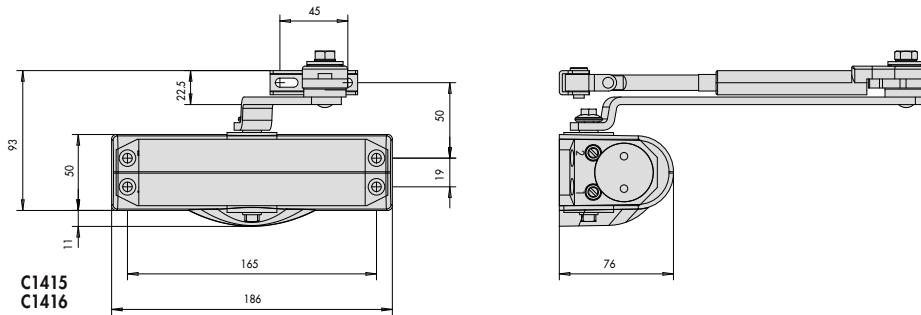


**C1415
C1416**

4

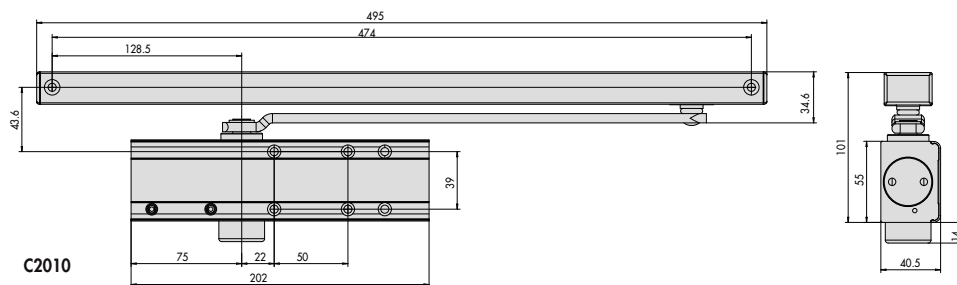


C2010

5

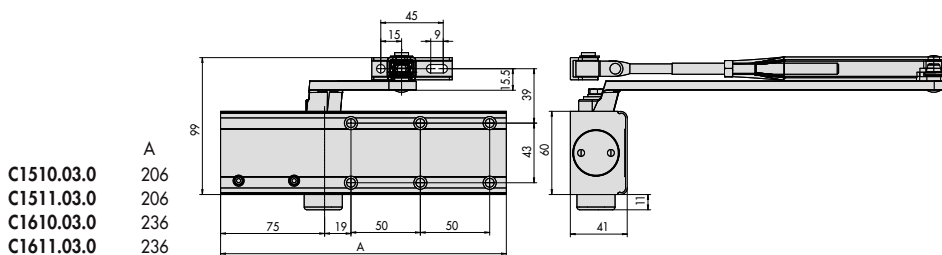


C1510.03.0	206
C1511.03.0	206
C1610.03.0	236
C1611.03.0	236

6

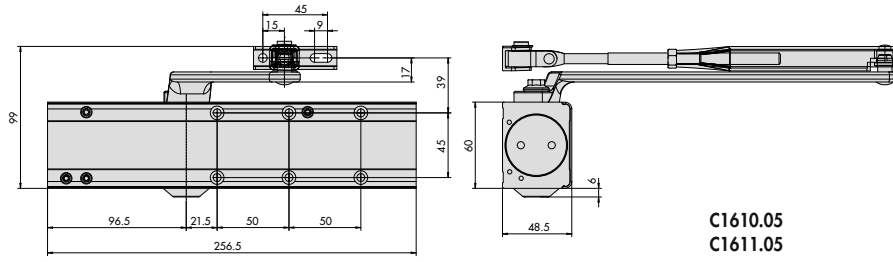


**C1610.05
C1611.05**

7

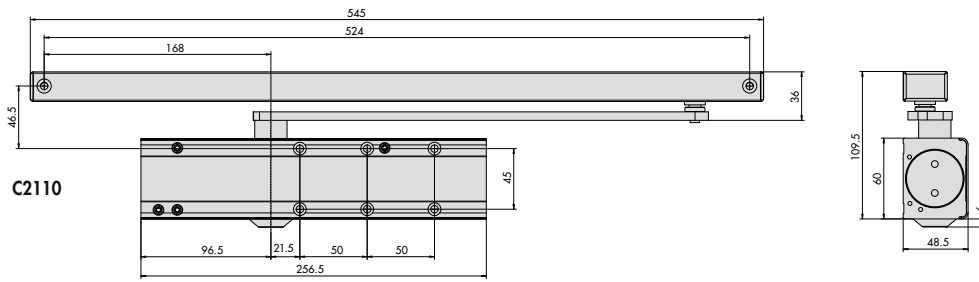


C2110

8

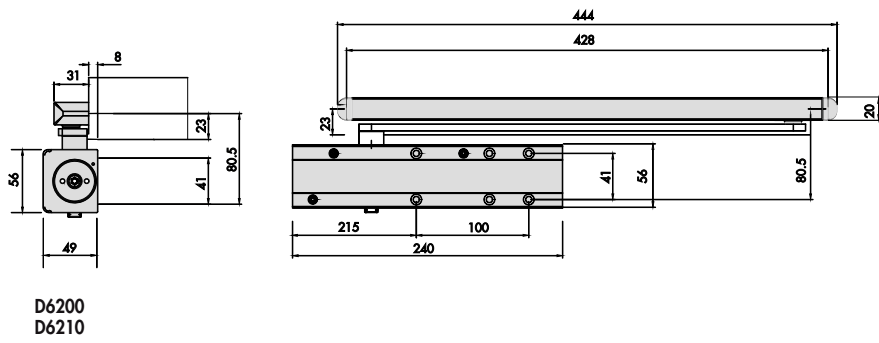

**D6200
D6210**

9

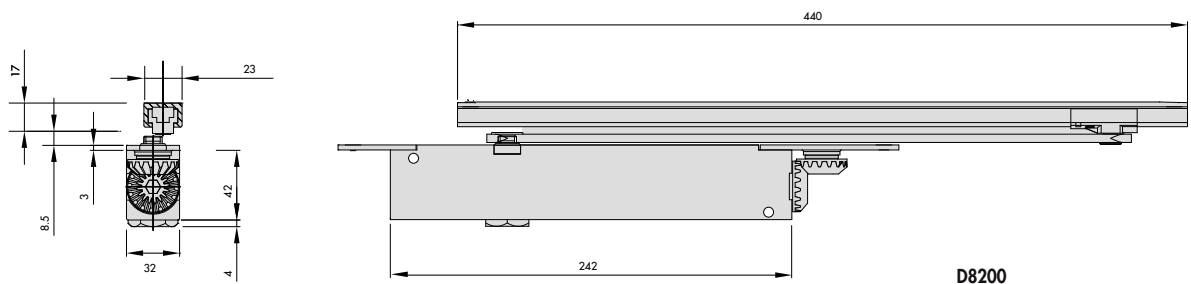

D8200

10



CISA®

Safes



Wall safes with electronic combinator - Digit vision.....	519	Standing safes with key	526
Wall safes with key	520	Standing safes with mechanical combinator.....	527
Wall safes, with mechanical combinator.....	521	Standing safes, 1 star key	528
Darwin series modular wall safes.....	522	Hotel safes - Digit Plus	529
Wall safes, 1 star key	523	Safes display stand.....	530
Standing safes with electronic combinator -		Spare parts and accessories for safes	531
Digit vision	524	Dimensional drawing.....	537
CASH Standing safes with electronic combinator	525		





Technical features:


- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves (where these are provided for)
- Use and maintenance instructions
- Installation instructions.

DGT Vision

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly

*	360	240	150	10	2	1	14,400	1	1 82710 30 0					
*	360	240	200	10	2	1	15,400	1	1 82710 31 0					
*	360	240	250	10	2	1	16,700	1	1 82710 32 0					
*	420	300	200	10	2	2	21,600	1	1 82710 40 0					
*	420	300	250	10	2	2	23,100	1	1 82710 41 0					
	420	300	300	10	2	2	24,900	1	1 82710 42 0					
*	490	360	200	10	2	2	28,950	1	1 82710 50 0					
*	490	360	250	10	2	2	30,000	1	1 82710 51 0					
	490	360	300	10	2	2	31,750	1	1 82710 52 0					
	360	490	200	10	2	4	29,350	1	1 82710 70 0					
	360	490	250	10	2	4	31,000	1	1 82710 71 0					
	360	490	300	10	2	4	32,700	1	1 82710 72 0					
	420	550	200	12	2	4	39,700	1	1 82710 80 0					
	420	550	250	12	2	4	39,700	1	1 82710 81 0					
	420	550	300	12	2	4	39,700	1	1 82710 82 0					
	490	620	200	12	2	4	51,000	1	1 82710 90 0					
	490	620	250	12	2	4	51,000	1	1 82710 91 0					
	490	620	300	12	2	4	51,000	1	1 82710 92 0					




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled through automated welding
- Nickel-plated steel dead-bolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Kg	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Key only version
- 2 keys item 1.00101.00.2

			260	170	150	10	2	-	8,300	1	1	82010	10	0					
			260	170	200	10	2	-	9,300	1	1	82010	11	0					
	*		310	190	150	10	2	1	10,600	1	1	82010	20	0					
	*		310	190	200	10	2	1	11,400	1	1	82010	21	0					
			360	240	150	10	2	1	14,550	1	1	82010	30	0					
	*		360	240	200	10	2	1	15,600	1	1	82010	31	0					
			360	240	250	10	2	1	16,900	1	1	82010	32	0					
	*		420	300	200	10	2	2	21,600	1	1	82010	40	0					
	*		420	300	250	10	2	2	25,000	1	1	82010	41	0					
			420	300	300	10	2	2	24,500	1	1	82010	42	0					
			490	360	200	10	2	2	33,000	1	1	82010	50	0					
	*		490	360	250	10	2	2	30,500	1	1	82010	51	0					
			490	360	300	10	2	2	31,700	1	1	82010	52	0					
			360	490	200	10	2	4	32,200	1	1	82010	70	0					
			360	490	250	10	2	4	34,400	1	1	82010	71	0					
			360	490	300	10	2	4	35,700	1	1	82010	72	0					
			420	550	200	12	2	4	39,700	1	1	82010	80	0					
			420	550	250	12	2	4	41,300	1	1	82010	81	0					
			420	550	300	12	2	4	43,500	1	1	82010	82	0					
			490	620	200	12	2	4	51,000	1	1	82010	90	0					
			490	620	250	12	2	4	52,800	1	1	82010	91	0					
			490	620	300	12	2	4	54,800	1	1	82010	92	0					




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:


- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Key and 3-knob combinator version
- 2 keys item 1.00101.00.2

310	190	150	10	2	1	11,000	1	1 82210 20 0					
310	190	200	10	2	1	12,000	1	1 82210 21 0					
360	240	150	10	2	1	15,000	1	1 82210 30 0					
*	360	240	200	10	2	15,850	1	1 82210 31 0					
360	240	250	10	2	1	12,900	1	1 82210 32 0					
*	420	300	200	10	2	22,200	1	1 82210 40 0					
420	300	250	10	2	2	23,500	1	1 82210 41 0					
420	300	300	10	2	2	24,750	1	1 82210 42 0					
490	360	200	10	2	2	28,700	1	1 82210 50 0					
490	360	250	10	2	2	30,500	1	1 82210 51 0					
490	360	300	10	2	2	32,000	1	1 82210 52 0					
360	490	200	10	2	4	29,400	1	1 82210 70 0					
360	490	250	10	2	4	30,950	1	1 82210 71 0					
360	490	300	10	2	4	36,150	1	1 82210 72 0					
420	550	200	12	2	4	40,000	1	1 82210 80 0					
420	550	250	12	2	4	42,850	1	1 82210 81 0					
420	550	300	12	2	4	43,900	1	1 82210 82 0					
490	620	200	12	2	4	51,000	1	1 82210 90 0					
490	620	250	12	2	4	52,800	1	1 82210 91 0					
490	620	300	12	2	4	55,250	1	1 82210 92 0					



- 3-knob combinator only version

310	190	150	10	2	1	10,800	1	1 82410 20 0					
310	190	200	10	2	1	11,700	1	1 82410 21 0					
360	240	150	10	2	1	14,700	1	1 82410 30 0					
*	360	240	200	10	2	15,800	1	1 82410 31 0					
360	240	250	10	2	1	17,300	1	1 82410 32 0					
420	300	200	10	2	2	22,000	1	1 82410 40 0					
420	300	250	10	2	2	23,150	1	1 82410 41 0					
420	300	300	10	2	2	24,500	1	1 82410 42 0					
490	360	200	10	2	2	28,950	1	1 82410 50 0					
490	360	250	10	2	2	30,700	1	1 82410 51 0					
490	360	300	10	2	2	35,000	1	1 82410 52 0					
360	490	200	10	2	4	29,500	1	1 82410 70 0					
360	490	250	10	2	4	31,000	1	1 82410 71 0					
360	490	300	10	2	4	35,700	1	1 82410 72 0					
420	550	200	12	2	4	40,700	1	1 82410 80 0					
420	550	250	12	2	4	42,000	1	1 82410 81 0					
420	550	300	12	2	4	44,000	1	1 82410 82 0					
490	620	200	12	2	4	50,700	1	1 82410 90 0					
490	620	250	12	2	4	53,000	1	1 82410 91 0					
490	620	300	12	2	4	54,500	1	1 82410 92 0					



Technical features:


- Modular front and safe compartment
- 10 mm. thick steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Frame edge cover
- Shelf
- Bolts for fixing the compartment
- Instruction sheet
- Installation instructions


Darwin

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.




- Safe compartment with temporary cover

*	470	336	200	-	10,650	1	1	83000 40 0
	470	336	250	-	12,000	1	1	83000 41 0



- Faceplate with key
- Two keys item 1.00101.00.2
- To be combined with item 83000.40/41

	420	300	10	2	2	1	19,400	1	1	83010 40 0
--	-----	-----	----	---	---	---	--------	---	---	-------------------



- Lit keypad
- Faceplate with electronic combinator
- Internal light
- To be combined with item 83000.40/41
- 1.5 V alkaline thin battery operation
- Laser welded sealing parts assembly
- SUPPLIED AS STANDARD:
Power cable
- Shelf

*	420	300	10	2	2	1	18,300	1	1	83710 40 0
---	-----	-----	----	---	---	---	--------	---	---	-------------------




Technical features:

- 8 mm. thick steel doors with laser cut between the frame and door
- Nickel-plated steel anti-sawing rolling dead-bolts (diameter 22 mm.)
- Seals are assembled through automated welding
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door

Supplied as standard:

- Shelves (where these are provided for)
- Installation instructions
- Instruction sheet

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Key only version
- 2 keys item 1.00100.00.2

*	310	190	145	8	2	1	9,400	1	1 8A010 20 0				
*	310	190	195	8	2	1	10,300	1	1 8A010 21 0				
*	360	240	145	8	2	1	12,650	1	1 8A010 30 0				
*	360	240	195	8	2	1	13,700	1	1 8A010 31 0				
*	420	300	195	8	2	1	18,100	1	1 8A010 40 0				
*	420	300	245	8	2	1	20,000	1	1 8A010 41 0				



Technical features:


- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves (where these are provided for)
- Use and maintenance instructions
- Installation instructions.

DGT Vision

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand Fin.	Pers. Spec.



- Back-lit alphanumeric keypad
- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly
- Sound and visual indications
- Tamper-proof lock

*	360	240	300	10	2	2	1	28,200	1	1 82750 34 0
*	420	300	350	10	2	2	1	40,500	1	1 82750 43 0
	490	360	350	10	2	2	1	51,000	1	1 82750 53 0
	360	490	400	10	2	4	2	55,650	1	1 82750 74 0
	420	550	450	12	2	4	2	75,000	1	1 82750 85 0
	490	620	450	12	2	4	2	92,000	1	1 82750 95 0



Technical features:


- Lit keypad.
- 10 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

DGT Cash

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim. Hand	Fin.	Pers. Spec.



- Back-lit alphanumeric keypad
- Slot to introduce money or papers
- Opening delay programmable between 1 and 99 minutes
- Electronic combinator
- Internal light
- 1.5 V alkaline battery powered
- Removable door
- Laser welded sealing part assembly

	360	270	300	10		2	1	22,200	1	1	82751	35	0			
	360	520	400	10	2	4	2	52,400	1	1	82751	75	0			




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Key only version
- Two keys item 1.00101.00.2

360	240	300	10	2	1	28,300	1	1 82050 34 0
420	300	350	10	2	2	40,900	1	1 82050 43 0
490	360	350	10	2	2	54,000	1	1 82050 53 0
360	490	400	10	2	4	54,900	1	1 82050 74 0
420	550	450	12	2	4	75,500	1	1 82050 85 0
490	620	450	12	2	4	92,000	1	1 82050 95 0




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:


- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Key and 3-knob combinator version
- Two keys item 1.00101.00.2

360	240	300	10	2	1	28,600	1	1	82250 34 0
420	300	350	10	2	1	42,800	1	1	82250 43 0
490	360	350	10	2	1	55,000	1	1	82250 53 0
360	490	400	10	2	4	59,000	1	1	82250 74 0
420	550	450	12	2	4	75,750	1	1	82250 85 0
490	620	450	12	2	4	93,080	1	1	82250 95 0



- 3-knob combinator only version

360	240	300	10	2	1	28,600	1	1	82450 34 0
420	300	350	10	2	1	42,200	1	1	82450 43 0
490	360	350	10	2	1	53,800	1	1	82450 53 0
360	490	400	10	2	4	58,700	1	1	82450 74 0
420	550	450	12	2	4	75,600	1	1	82450 85 0
490	620	450	12	2	4	92,500	1	1	82450 95 0




Technical features:

- 8 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers.



- Key only version
- 2 keys item 1.00100.00.2

310	190	250	8	2	1	13,200	1	1 8A050 23 0
360	240	300	8	2	1	19,600	1	1 8A050 34 0
420	300	350	8	2	1	27,350	1	1 8A050 43 0

**Technical features:**

- Door laser cut
- Audit trail can be stored to an SD card
- Automatic interior lighting
- Easy-to-read ADA-compliant keypad
- 7-digit led display
- Size to place a 15" laptop inside
- 2-level service Master Code
- Motorised lock
- Emergency mechanical override

Supplied as standard:

- 4x AARL6 batteries
- Interior carpet
- Emergency key
- Interior lighting



On request:


- Internal power socket
- Left hand opening
- AP3 S protected duplication emergency key

Finishes:

- Supplied as standard:
Dark grey Grafite™ (RAL 7015)
- On request:
Light grey Silicon (RAL 7032)

CISA eSIGNO

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- C2000 cylinder for mechanical emergency override
- Finish: silica gray

DX	190	430	350	5	2	-	11,600	1	1	A0L02	01	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L02	01	4		

- C2000 cylinder for mechanical emergency override
- Finish: graphite gray

DX	190	430	350	5	2	-	11,600	1	1	A0L02	01	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L02	01	4	93	

- C2000 cylinder for mechanical emergency override
- Finish: silica gray
- Power supply socket

DX	190	430	350	5	2	-	11,600	1	1	A0L02	31	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L02	31	4		

- C2000 cylinder for mechanical emergency override
- Finish: graphite gray
- Power supply socket

DX	190	430	350	5	2	-	11,600	1	1	A0L02	31	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L02	31	4	93	

- AP3 S cylinder for mechanical emergency override
- Finish: silica gray

DX	190	430	350	5	2	-	11,600	1	1	A0L01	01	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L01	01	4		

- AP3 S cylinder for mechanical emergency override
- Finish: graphite gray

DX	190	430	350	5	2	-	11,600	1	1	A0L01	01	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L01	01	4	93	


- AP3 S cylinder for mechanical emergency override
- Finish: silica gray
- Power supply socket

DX	190	430	350	5	2	-	11,600	1	1	A0L01	31	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L01	31	4		

- AP3 S cylinder for mechanical emergency override
- Finish: graphite gray
- Power supply socket











DX	190	430	350	5	2	-	11,600	1	1	A0L01	31	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L01	31	4	93	






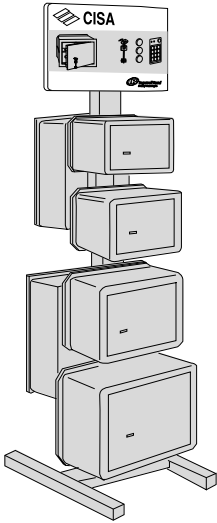
Type	Description	For series/item	 Unit weight	 Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.	
------	-------------	-----------------	--	---	---	--





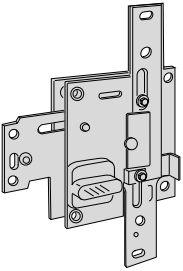



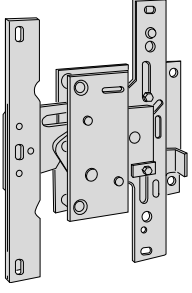



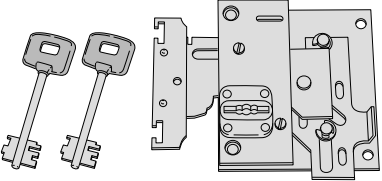
- DISPLAY FOR WALL SAFES
- WITH ADJUSTABLE SUPPORTS
- FOR WALL AND STANDING SAFES

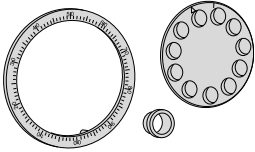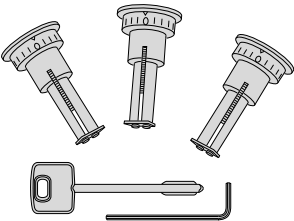

15,000 1 1 06610 50 0


Type	Description	For series/item	ITEM			
			Unit weight	Pieces	Type	Dim. Hand. Fit. Pers. Spec.
	• Combinator dial and plate	1 58010 00 0	0,200	1	1 07095 00 0	
	• Set of 3 knobs and combinator changing key	1 58011 00 0	0,150	1	1 07108 00 0	
	• Lock operating knob	1 57424 30 1, 1 57429 30 1	0,160	1	1 07109 00 0	
	• Changing key for safes with combinator	1 58010 00 0, 82310, 82350, 82510, 82550	0,020	1	1 07109 01 0	
	• Changing key set for safes with 3-knob combinator	1 58011 00 0, 82210, 82250, 82410, 82450	0,040	0	1 07109 03 0	
	• 9V battery holder	82610, 82650	0,030	1	1 07114 00 0	
	• Electronic board 6V master code		0,035	1	1 07114 12 0	
	• Electronic board for Digit Vision safe	82710, 82750	0,035	1	1 07114 15 0	
	• 6V battery holder	82610, 82650, 82710, 82750	0,030	1	1 07114 05 0	
	• Solenoide plate group 6V		0,250	0	1 07114 06 0	

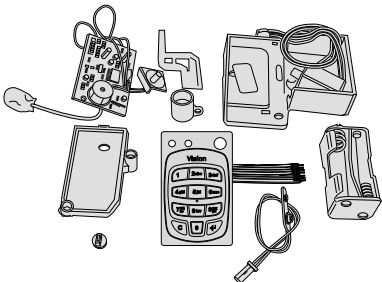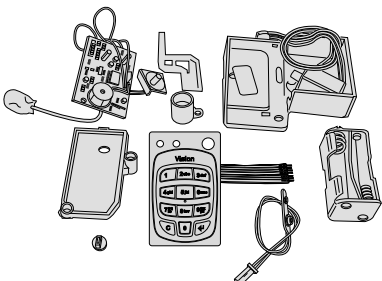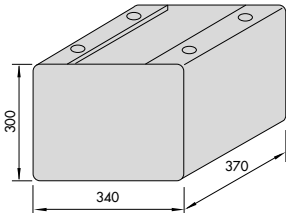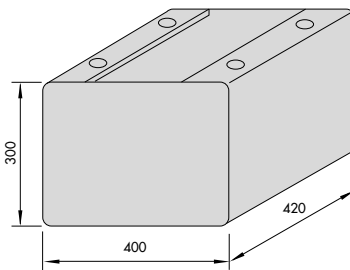
Type	Description	For series/item		ITEM				
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Kit to convert from safes Digit to safes Digit Vision Master Code 	0,370	1	1 07114 11 0				
	<ul style="list-style-type: none"> Key pad for Digit Vision safe 	0,005	1	1 07114 16 0				
	<ul style="list-style-type: none"> Kit to convert from safes Digit to safes Digit Vision 	0,370	1	1 07114 17 0				
	<ul style="list-style-type: none"> Lacquered steel support for furniture safes 	1 82050 74 0, 1 82250 74 0, 1 82350 74 0, 1 82450 74 0, 1 82550 74 0, 1 82650 74 0	16,650	1	1 07125 00 0			
	<ul style="list-style-type: none"> Lacquered steel support for furniture safes 	1 82050 85 0, 1 82050 95 0, 1 82250 85 0, 1 82250 95 0, 1 82350 85 0, 1 82350 95 0, 1 82450 85 0, 1 82450 95 0, 1 82550 85 0, 1 82550 95 0	17,950	1	1 07125 01 0			
	<ul style="list-style-type: none"> 9V external power supply cable 	82610, 82650, 82651	0,030	1	1 07430 31 0			

Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • 6V external power supply cable 	82710, 82750, 82751	0,030	1	1	07430	32	0
	<ul style="list-style-type: none"> • Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR KEY-OPERATED SAFES: item 1.82010.10.0 item 1.82010.11.0 		0,426	1	1	57409	30	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.20 ÷ 32 Series 82050.34 Series 82210.20 ÷ 32 Series 82250.34 Series 82310.30 ÷ 32 Series 82350.34 		0,460	1	1	57411	30	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.20 ÷ 41 		0,460	1	1	57411	31	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.40 ÷ 92 Series 82050.43 ÷ 95 Series 82210.40 ÷ 92 Series 82250.43 ÷ 95 Series 82310.40 ÷ 92 Series 82350.43 ÷ 95 Series 83010.40 		0,620	1	1	57416	30	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.50/51 		0,620	1	1	57416	31	1


Type	Description	For series/item		ITEM					
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Zinc plated single throw steel lock • Three locking points • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: Series 82410.40 ÷ 92 Series 82450.43 ÷ 95 Series 82510.40 ÷ 92 Series 82550.43 ÷ 95 Series 82610.40 ÷ 72 Series 82650.43 ÷ 74 Series 83610.40 	0,500	1	1	57424	30	1		
	<ul style="list-style-type: none"> • Zinc plated single throw steel lock • One locking point • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: Series 82410.20 ÷ 32 Series 82450.34 Series 82510.30 ÷ 32 Series 82550.34 Series 82610.30 ÷ 32 Series 82650.34 	0,400	1	1	57429	30	1		
	<ul style="list-style-type: none"> • Combinator dial 	82310, 82315, 82350, 82510, 82515, 82550	0,400	1	1	58010	00	0	
	<ul style="list-style-type: none"> • 3-knob combinator 	82210, 82250, 82410, 82450	0,430	1	1	58011	00	0	
	<ul style="list-style-type: none"> • Steel lock with zinc coating • One locking point • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 10 0,	0,426	1	1	87409	30	1	
		1 82010 11 0,	0,426	1	1	87410	30	1	
		1 82010 20 0,							
		1 82010 21 0,							
		1 82210 20 0,							
	1 82210 21 0								
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 40 0,	0,426	1	1	87412	30	1	
		1 82010 41 0,							
		1 82010 42 0,							
		1 82050 43 0,							
1 82210 40 0,									
1 82210 41 0,									
1 82210 42 0,									
1 82250 43 0									
<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 50 0,	0,426	1	1	87414	30	1		
	1 82010 51 0,								
	1 82010 52 0,								
	1 82050 53 0								

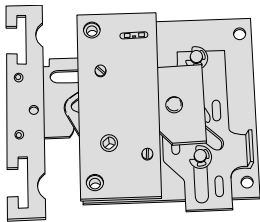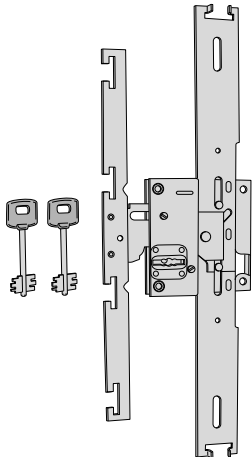Type	Description	For series/item		ITEM												
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.								
	<ul style="list-style-type: none"> • Steel lock with zinc coating • One locking point • Suitable for safes with turning deadbolts 	1 82410 20 0,	0,426	1	1 B7411 30 1											
		1 82410 21 0,														
		1 82410 30 0,														
		1 82410 31 0,														
		1 82410 32 0,														
		1 82450 34 0,														
		1 82710 30 0,														
		1 82710 31 0,														
		1 82710 32 0,														
		1 82750 34 0,														
		1 82751 35 0														
		<hr/>														
			<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82410 50 0,						0,426	1	1 B7415 30 1				
1 82410 51 0,																
1 82410 52 0,																
1 82450 53 0,																
1 82710 50 0,																
1 82710 51 0,																
1 82710 52 0,																
1 82750 53 0																
<hr/>																
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 			1 82210 41 0,	0,426	1	1 B7413 30 1									
		1 82410 40 0,														
		1 82410 42 0,														
		1 82450 43 0,														
		1 82710 40 0,														
		1 82710 41 0,														
		1 82710 42 0,														
		1 82750 43 0														
		<hr/>														
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 70 0,	0,426	1	1 B7424 30 1											
		1 82010 71 0,														
		1 82010 72 0,														
		1 82050 74 0,														
		1 82210 70 0,														
		1 82210 71 0,														
		1 82210 72 0,														
		1 82250 74 0														
		<hr/>														
			<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 80 0,						0,426	1	1 B7426 30 1				
				1 82010 81 0,												
				1 82010 82 0,												
				1 82050 85 0,												
1 82210 80 0,																
1 82210 81 0,																
1 82210 82 0,																
1 82250 85 0																
<hr/>																
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 90 0,	0,426	1	1 B7428 30 1											
		1 82010 91 0,														
		1 82010 92 0,														
		1 82050 95 0,														
		1 82210 90 0,														
		1 82210 91 0,														
		1 82210 92 0,														
		1 82250 95 0														
<hr/>																

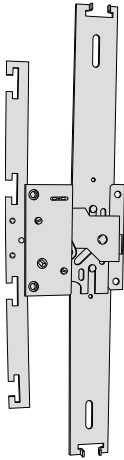
Type	Description	For series/item		ITEM									
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.					
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82410 70 0,	0,426	1	B7425 30 1								
		1 82410 71 0,											
		1 82410 72 0,											
		1 82450 74 0,											
		1 82710 70 0,											
		1 82710 71 0,											
		1 82710 72 0,											
		1 82750 74 0,											
		1 82751 75 0											
		<hr/>											
			<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82410 90 0,		0,426	1	B7429 30 1					
				1 82410 91 0,									
				1 82410 92 0,									
				1 82450 95 0,									
1 82710 90 0,													
1 82710 91 0,													
1 82710 92 0,													
1 82750 95 0, 1 82750 95 0													

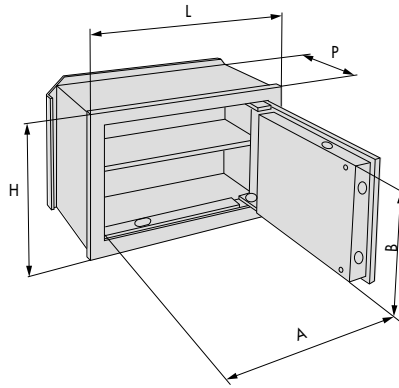

ITEM	DIMENSIONS (mm)										Depth	Shelves	Weight Kg
	Outside			Inside			A B		Rear				
	L	H	P	L	H	P	A	B	Outside	Outside			
1-8A010-20	310	190	150	292	172	100	192	115	340	210	2	1	12,9
1-8A010-21	"	"	200	"	"	150	192	115	340	210	2	1	13,6
1-8A010-30	360	240	150	342	222	100	242	165	390	260	2	1	17,5
1-8A010-31	"	"	200	"	"	150	242	165	390	260	2	1	18,4
1-8A010-40	420	300	200	402	282	150	302	225	450	320	2	1	24,7
1-8A010-41	"	"	250	"	"	200	302	225	450	320	2	1	25,8
1-82010-10	260	170	150	242	152	100	142	95	290	190	2	-	7,3
1-82010-11	"	"	200	"	"	150	142	95	290	190	2	-	8,0
1-82010-20 1-82210-20 1-82410-20	310	190	150	292	172	100	192	115	340	210	2	1	12,9
1-82010-21 1-82210-21 1-82410-21	"	"	200	"	"	150	192	115	340	210	2	1	13,6
1-82010-22 1-82210-22 1-82410-22	"	"	250	"	"	200	192	115	340	210	2	1	14,4
1-82010-30 1-82210-30 1-82410-30 1-82710-30	360	240	150	342	222	100	242	165	390	260	2	1	17,5
1-82010-31 1-82210-31 1-82410-31 1-82710-31	"	"	200	"	"	150	242	165	390	260	2	1	18,4
1-82010-32 1-82210-32 1-82410-32 1-82710-32	"	"	250	"	"	200	242	165	390	260	2	1	19,3
1-82010-40 1-82210-40 1-82410-40 1-82710-40	420	300	200	402	282	150	302	225	450	320	4+2	1	24,7
1-82010-41 1-82210-41 1-82410-41 1-82710-41	"	"	250	"	"	200	302	225	450	320	4+2	1	25,8
1-82010-42 1-82210-42 1-82410-42 1-82710-42	"	"	300	"	"	250	302	225	450	320	4+2	1	26,9
1-82010-50 1-82210-50 1-82410-50 1-82710-50	490	360	200	472	342	150	372	285	520	380	4+2	1	33,1
1-82010-51 1-82210-51 1-82410-51 1-82710-51	"	"	250	"	"	200	372	285	520	380	4+2	1	34,4
1-82010-52 1-82210-52 1-82410-52 1-82710-52	"	"	300	"	"	250	372	285	520	380	4+2	1	35,7
1-82010-70 1-82210-70 1-82410-70 1-82710-70	360	490	200	342	472	150	242	415	390	510	4+2	2	33,1
1-82010-71 1-82210-71 1-82410-71 1-82710-71	"	"	250	"	"	200	242	415	390	510	4+2	2	34,4
1-82010-72 1-82210-72 1-82410-72 1-82710-72	"	"	300	"	"	250	242	415	390	510	4+2	2	35,7
1-82010-80 1-82210-80 1-82410-80 1-82710-80	420	550	200	402	532	150	302	475	450	570	4+2	2	39,7
1-82010-81 1-82210-81 1-82410-81 1-82710-81	"	"	250	"	"	200	302	475	450	570	4+2	2	41,3
1-82010-82 1-82210-82 1-82410-82 1-82710-82	"	"	300	"	"	250	302	475	450	570	4+2	2	42,9
1-82010-90 1-82210-90 1-82410-90 1-82710-90	490	620	200	472	602	150	372	545	520	640	4+2	2	51,0
1-82010-91 1-82210-91 1-82410-91 1-82710-91	"	"	250	"	"	200	372	545	520	640	4+2	2	52,8
1-82010-92 1-82210-92 1-82410-92 1-82710-92	"	"	300	"	"	250	372	545	520	640	4+2	2	54,6

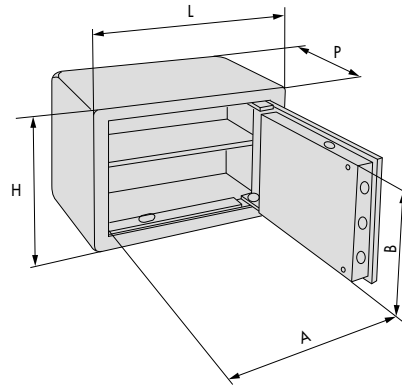

ITEM	DIMENSIONS (mm)								Dentbolt	Shelves	Weight Kg
	Outside			Inside			A	B			
	L	H	P	L	H	P					
1-8A050-23	360	240	300	350	230	245	242	165	2	1	13,2
1-8A050-34	420	300	350	410	290	295	302	225	2	1	19,6
1-8A050-43	490	360	350	480	350	295	372	285	2	1	22,5
1-82050-34 1-82250-34 1-82450-34 1-82750-34	360	240	300	350	230	245	242	165	2	1	25,5
1-82050-43 1-82250-43 1-82450-43 1-82750-43	420	300	350	410	290	295	302	225	4+2	1	38,7
1-82050-53 1-82250-53 1-82450-53 1-82750-53	490	360	350	480	350	295	372	285	4+2	1	49,5
1-82050-74 1-82250-74 1-82450-74 1-82750-74	360	490	400	350	480	345	242	415	4+2	2	54,2
1-82050-85 1-82250-85 1-82450-85 1-82750-85	420	550	450	410	540	395	302	475	4+2	2	69,4
1-82050-95 1-82250-95 1-82450-95 1-82750-95	490	620	450	480	610	395	372	545	4+2	2	84,5
1-82751-34	360	240	300	350	230	245	242	165	2	1	27,2
1-82751-74	360	490	400	350	480	345	242	415	4+2	2	52,4
1-A0L01-01	430	190	350	427	185	295	131	365	1		11,6
1-A0L01-31	430	190	350	427	185	295	131	365	1		11,6
1-A0L02-01	430	190	350	427	185	295	131	365	1		11,6
1-A0L02-31	430	190	350	427	185	295	131	365	1		11,6

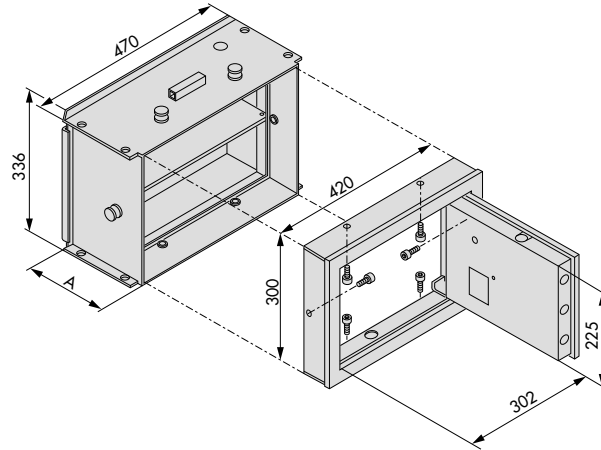

	DIMENSIONS (mm)								Dentbolt	Shelves	Weight Kg	
	Esterne			Inside			Outside					Rear outside
	L	H	P	L	H	P	A	B				
SAFES COMPARTMENT												
1-83000-40	470	336	200	420	300	200	-	-	450	320	-	15,2
1-83000-41	"	"	250	"	"	250	-	-	"	"	-	16,3
FRONTAL												
1-83010-40	420	300	-	-	-	-	302	225	-	-	2+2	19,4
1-83710-40	"	"	-	-	-	-	"	"	-	-	2+2	19,7



Keying kits



Keying components for cylinders and padlocks 540
Keying components for double-bit key locks..... 548

Assembling tools for cylinders and padlocks 553

Cylinders and padlocks are available in **SEMI-ASSEMBLED** or **UNASSEMBLED** versions :

- "SEMI - ASSEMBLED"(ready for keying)
- "UNASSEMBLED" (completely unassembled)









In both cases, keys, pins, drivers, springs, pin hole plugs, circlips, are to be ordered separately.








CYLINDERS	SEMI-ASSEMBLED 90			UNASSEMBLED 91				
	STD	C2000	SP	STD	C2000	SP	Astral Astral-S	Astral Tekno
<ul style="list-style-type: none"> • Euro profile double cylinders • Euro profile single cylinders..... • Euro profile thumb turn cylinders • Rim cylinders, cam locks, furniture cylinders • Rim cylinder set • Hardened steel padlock cylinders 	TO BE DISCONTINUED	• • • • • •	TO BE DISCONTINUED	• • • • • •	• • • • • •	TO BE DISCONTINUED	• • • • • •	• • • • • •
BRASS PADLOCKS	SEMI-ASSEMBLED 90							
	STANDARD		LIM					
<ul style="list-style-type: none"> • 22010-30/40 • 22010-50/60 	• •		See PP					
<p>HARDENED STEEL PADLOCKS in "UNASSEMBLED" version 91</p> <ul style="list-style-type: none"> - Hardened steel padlocks in UNASSEMBLED version are supplied without cylinder and without the cylinder and padlock drill resistant plate When ordering the padlock cylinder you must specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard). 								
HARDENED STEEL PADLOCKS								
<ul style="list-style-type: none"> • 28050-55/56/57, 28350-62 • 28050-70/71/72, 28350-73, 28550-66/67/75/84/85 							• •	

In addition to the code and characteristics, the order should specify:

- For items with 01070 type key: the key profile hand
Es: **0G300-05-1-00-90** (semi-assembled cylinder with right-hand keyway)
- When ordering specify profile number (see first 3 digit of key-code) for "SP" products.
Es: **8815-05-1-00-90** key code **102** (semi-assembled "SP" cylinder with keyway 102)


Type	Description	Bitting	H	Kg Unit weight	Pieces	ITEM			
						Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Bronze pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330 • Key differ: 0.65 mm. 	1	5,20	0,305	1000	1	07551	01	0
		2	5,85	0,340	1000	1	07551	02	0
		3	6,50	0,370	1000	1	07551	03	0
		4	7,15	0,384	1000	1	07551	04	0
		5	7,80	0,430	1000	1	07551	05	0
		6	8,45	0,480	1000	1	07551	06	0
		7	9,10	0,530	1000	1	07551	07	0
	<ul style="list-style-type: none"> • Bronze pin for cylinders and padlocks with key item 00500 and 00450 • Key differ: 0.5 mm. 		4,00	0,235	1000	1	07551	11	0
		1	4,50	0,250	1000	1	07551	12	0
		2	5,00	0,250	1000	1	07551	13	0
		3	5,50	0,315	1000	1	07551	14	0
		4	6,00	0,330	1000	1	07551	15	0
		5	6,50	0,365	1000	1	07551	16	0
		6	7,00	0,400	1000	1	07551	17	0
		7	7,50	0,480	1000	1	07551	18	0
	<ul style="list-style-type: none"> • Bronze pin for C2000 cylinders with key item 01070 • Key differ: 0.44 mm. 	1	5,20	0,305	1000	1	07551	01	0
		2	5,64	0,285	1000	1	07551	41	0
		3	6,07	0,330	1000	1	07551	42	0
		4	6,50	0,370	1000	1	07551	03	0
		5	6,94	0,365	1000	1	07551	43	0
		6	7,37	0,400	1000	1	07551	44	0
		7	7,80	0,430	1000	1	07551	05	0
		8	8,25	0,460	1000	1	07551	45	0
		9	8,70	0,490	1000	1	07551	46	0
	<ul style="list-style-type: none"> • Bronze pin for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0 • Key differ: 0.48 mm. 	1	5,05	0,255	1000	1	07551	71	0
		2	5,53	0,185	1000	1	07551	72	0
		3	6,01	0,290	1000	1	07551	73	0
		4	6,49	0,185	1000	1	07551	74	0
		5	6,97	0,185	1000	1	07551	75	0
		6	7,45	0,185	1000	1	07551	76	0
		7	7,93	0,185	1000	1	07551	77	0
	<ul style="list-style-type: none"> • Bronze pin for padlocks with key item 01410, 01420, 01425, 01430 • Key differ: 0.65 mm. 	1	4,45	0,206	1000	1	07551	51	0
		2	5,10	0,250	1000	1	07551	52	0
		3	5,75	0,260	1000	1	07551	53	0
		4	6,40	0,300	1000	1	07551	54	0
		5	7,05	0,322	1000	1	07551	55	0
		6	7,70	0,350	1000	1	07551	56	0
		7	8,35	0,375	1000	1	07551	57	0
	<ul style="list-style-type: none"> • Hardened steel upper passive pin 		5,80	0,241	1000	1	07551	79	0
	<ul style="list-style-type: none"> • Brass driver for cylinders and padlocks with key item 00401, 00450, 00500, 01310, 01320, 01330, 01070 		3,00	0,295	1000	1	07552	01	0
			4,00	0,226	1000	1	07552	02	0
			5,00	0,305	1000	1	07552	03	0


Type	Description	Bitting	H	Unit weight Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Brass driver for cylinders and padlocks with key item 01410, 01420, 01425, 01430 • Brass driver for padlocks item 1.22010.30.0 	3,85	0,215	1000	1	07552	51	0	
		3,4	0,215	1000	1	07552	04	0	
	<ul style="list-style-type: none"> • Mushroom brass driver for ASTRAL cylinders with key item 1.00620.01.0, 1.00620.90.0 	1	8,00	0,410	1000	1	07552	71	0
		2	7,50	0,410	1000	1	07552	72	0
		3	7,00	0,410	1000	1	07552	73	0
		4	6,50	0,410	1000	1	07552	74	0
		5	6,00	0,410	1000	1	07552	75	0
	<ul style="list-style-type: none"> • Brass driver for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0 	6	5,50	0,410	1000	1	07552	76	0
	<ul style="list-style-type: none"> • Brass driver for ASTRAL and ASIX rim cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0 	1	5,50	0,410	1000	1	07552	81	0
		2	0,00	0,410	1000	1	07552	82	0
		3	4,50	0,410	1000	1	07552	83	0
		4	3,95	0,410	1000	1	07552	84	0
		5	3,30	0,410	1000	1	07552	85	0
		6	2,65	0,410	1000	1	07552	86	0
	<ul style="list-style-type: none"> • Mushroom brass driver for cylinders and padlocks with key item 00401, 00450, 00500, 01310, 01320, 01330, 01070 	3,00	0,255	1000	1	07553	01	0	
		4,00	0,212	1000	1	07553	02	0	
		5,00	0,228	1000	1	07553	03	0	
	<ul style="list-style-type: none"> • Mushroom brass driver for cylinders and padlocks with key item 01410, 01420, 01425, 01430 • Mushroom brass driver for padlocks item 1.22010.30.0 	3,85	0,170	1000	1	07553	51	0	
		3,4	0,170	1000	1	07553	04	0	
	<ul style="list-style-type: none"> • Brass spring for cylinders series 02500 and 06500 • Brass spring for cylinders series 02550, 02552 and 06200 • Brass spring for: Cylinders series C2000, 08300, 08700, 08800 Padlocks item 1.22010.50/60 and 1.26010.50/60 • Brass spring for cylinders series 07573 	13,50	0,095	1000	1	07554	01	0	
		10,50	0,080	1000	1	07554	02	0	
		15,50	0,094	1000	1	07554	03	0	
		10,70	0,102	1000	1	07554	05	0	
	<ul style="list-style-type: none"> • Brass spring for padlocks item 1.22010.30/40 	9,00	0,080	1000	1	07554	51	0	

Type	Description	Bitting	H	Kg Unit weight	Pieces	ITEM			
						Type	Dim. Hand	Fin.	Pers. Spec.
	• Bronze spring for ASTRAL SIGILLO cylinders	9,50	0,078	1000	1	07554	71	0	
	• Bronze spring for ASTRAL ASIX cylinders	12,00	0,065	1000	1	07554	72	0	
	• Bronze spring for ASTRAL and ASIX rim cylinders	10,00	0,102	1000	1	07554	73	0	
	• Steel spring for snap resistant cylinders SIGILLO	9,50	0,078	1000	1	07554	91	0	
	• Steel spring for mortice cylinders	12,00	0,065	1000	1	07554	92	0	
	• Brass master pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330, 01070	1	0,55	0,070	1000	1	07555	01	0
	• Key differ: 0.65 mm.	2	1,20	0,100	1000	1	07555	02	0
		3	1,85	0,145	1000	1	07555	03	0
		4	2,50	0,177	1000	1	07555	04	0
		5	3,15	0,213	1000	1	07555	05	0
	• Additional brass master pin for complex systems with key item 00401, 01310, 01320, 01330, 01070	1	0,65	0,078	1000	1	07555	11	0
	• Key differ: 0.65 mm.	2	1,30	0,100	1000	1	07555	12	0
		3	1,95	0,145	1000	1	07555	13	0
		4	2,65	0,175	1000	1	07555	14	0
	• Brass master pin for cylinders and padlocks with key item 00450, 00500	2	1,00	0,095	1000	1	07555	21	0
	• Key differ: 0.5 mm.	3	1,50	0,120	1000	1	07555	22	0
		4	2,00	0,130	1000	1	07555	23	0
		5	2,50	0,185	1000	1	07555	24	0
		6	3,00	0,170	1000	1	07555	25	0
		7	3,50	0,230	1000	1	07555	26	0
		• Additional brass master pin for complex systems with ASTRAL and ASIX cylinders	2	0,96	0,078	1000	1	07555	31
• Key differ 0.48		3	1,44	0,078	1000	1	07555	32	0
	• Brass master pin for ASTRAL and ASIX cylinders	2	0,88	0,213	1000	1	07555	33	0
	• Key differ 0.48	3	1,36	0,213	1000	1	07555	34	0
		4	1,84	0,213	1000	1	07555	35	0
		5	2,32	0,213	1000	1	07555	36	0
		• Brass master pin for cylinders and padlocks with key item 01410, 01420, 01425, 01430	1	0,55	0,067	1000	1	07555	51
• Key differ: 0.65 mm.		2	1,20	0,095	1000	1	07555	52	0
		3	1,85	0,125	1000	1	07555	53	0
		4	2,50	0,153	1000	1	07555	54	0
		5	3,15	0,170	1000	1	07555	55	0
• Additional brass master pin for complex systems with key item 01410, 01420, 01425, 01430		1	0,65	0,073	1000	1	07555	61	0
• Key differ: 0.65 mm.		2	1,30	0,097	1000	1	07555	62	0
		3	1,95	0,121	1000	1	07555	63	0
		4	2,60	0,154	1000	1	07555	64	0

Type	Description	Bitting	H	Unit weight 	Pieces 	ITEM			
						Type	Dim.	Hand	Fin.
	• Brass plug retaining pin for padlocks art. 1.22010.30.0	11,6	0,165	250	1	07556	03	0	
	• Brass plug retaining pin for padlocks art. 1.22010.40.0	16,8	0,270	250	1	07556	04	0	
	• Brass plug retaining pin for padlocks art. 1.22010.50.0	21,2	0,313	250	1	07556	05	0	
	• Brass plug retaining pin for padlocks art. 1.22010.60.0	26,1	0,360	250	1	07556	06	0	
	• Brass pin hole plug for padlocks item 1.22010.50.0	4,50	0,323	1000	1	07557	01	0	
	• Brass pin hole plug for padlocks item 1.22010.60.0	9,50	0,630	1000	1	07557	02	0	
	• Brass pin hole plug for cylinders series C2000, 08300, 08700, 08800	4,10	0,295	1000	1	07557	11	0	
	• Pin hole plug for padlocks item 1.22010.40.0	5,50	0,322	1000	1	07557	52	0	
	• Pin hole plug for padlocks item 1.22010.30.0	2,6	0,322	1000	1	07557	03	0	
	• Brass plug retaining circlip for rim cylinders	0,195		250	1	07558	01	0	
	• Brass circlip for rim cylinders	0,275		250	1	07558	02	0	
	• Brass plug retaining circlip for cylinders series 07573	0,275		250	1	07558	03	0	
	• Steel circlip for rim cylinders	0,275		250	1	07558	05	0	
	• Hardened steel pin for cylinders and padlock with key item 00401- 01310 - 01320 - 01330	1	5,20	0,220	1000	1	07571	01	0
		2	5,85	0,265	1000	1	07571	02	0
		3	6,50	0,300	1000	1	07571	03	0
		4	7,15	0,335	1000	1	07571	04	0
		5	7,80	0,370	1000	1	07571	05	0
		6	8,45	0,400	1000	1	07571	06	0
	• Hardened steel pin for cylinders and padlocks with key item 00450 and 00500	4,00	0,400	1000	1	07571	11	0	
		1	4,50	0,400	1000	1	07571	12	0
		2	5,00	0,400	1000	1	07571	13	0
		3	5,50	0,295	1000	1	07571	14	0
		4	6,00	0,400	1000	1	07571	15	0
		5	6,50	0,400	1000	1	07571	16	0
		6	7,00	0,400	1000	1	07571	17	0
		7	7,50	0,400	1000	1	07571	18	0

Type	Description	Bitting	H	Kg Unit weight	Pieces	ITEM			
						Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Hardened steel pin for C2000 cylinders a with key item 01070 Key differ: 0.44 mm. 	1	5,20	0,220	1000	1	07571	01	0
		2	5,64	0,220	1000	1	07571	41	0
		3	6,07	0,265	1000	1	07571	42	0
		4	6,50	0,300	1000	1	07571	03	0
		5	6,94	0,300	1000	1	07571	43	0
		6	7,37	0,335	1000	1	07571	44	0
		7	7,80	0,370	1000	1	07571	05	0
		8	8,25	0,435	1000	1	07571	45	0
	<ul style="list-style-type: none"> Hardened steel pin for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0 1.00670.01.0 Key differ: 0.48 mm. 	1	5,05	0,155	1000	1	07571	71	0
		2	5,53	0,155	1000	1	07571	72	0
		3	6,01	0,155	1000	1	07571	73	0
		4	6,49	0,155	1000	1	07571	74	0
		5	6,97	0,155	1000	1	07571	75	0
		6	7,45	0,155	1000	1	07571	76	0
	<ul style="list-style-type: none"> Hardened steel driver for cylinders and padlocks with key item 00401, 00450, 00500, 01313, 01320, 01330 	2,50	0,235	1000	1	07572	01	0	
		3,50	0,235	1000	1	07572	02	0	
		5,00	0,272	1000	1	07572	03	0	
	<ul style="list-style-type: none"> Steel driver for rim and various cylinders from the ASTRAL and ASIX series 	1	5,50	0,380	1000	1	07572	71	0
		2	5,00	0,380	1000	1	07572	72	0
		3	4,50	0,380	1000	1	07572	73	0
		4	3,95	0,380	1000	1	07572	74	0
		5	3,30	0,380	1000	1	07572	75	0
		6	2,65	0,380	1000	1	07572	76	0
	<ul style="list-style-type: none"> Steel driver for mortice-single cylinders 	7,00	0,380	1000	1	07572	81	0	
		7,00	0,380	1000	1	07572	82	0	
		7,00	0,380	1000	1	07572	83	0	
		6,50	0,380	1000	1	07572	84	0	
	<ul style="list-style-type: none"> Steel driver for mortice-single cylinders 	5-6	5,50	0,380	1000	1	07572	87	0
	<ul style="list-style-type: none"> Hardened steel driver for key notch detection for European profile ASTRAL TEKNO cylinders 	1	7,00	0,410	1000	1	07572	83	0
		2	6,50	0,410	1000	1	07572	84	0
		3	6,00	0,410	1000	1	07572	85	0
		4	5,50	0,410	1000	1	07572	88	0
	<ul style="list-style-type: none"> Steel driver for snap resistant cylinders 	5-6	4,50	0,410	1000	1	07572	89	0
	<ul style="list-style-type: none"> Hardened steel upper passive pin 	5,80	0,241	1000	1	07551	79	0	

Type	Description	Bitting	H	Unit weight 	Pieces 	ITEM				
						Type	Dim.	Hand	Fin.	Pers.









- BKP steel driver assembly
- CISA patented system

1	7,00	0,155	1000	1	07572 91 0
2-3	6,50	0,155	1000	1	07572 92 0




Type	Description	Bitting	H	Kg Unit weight	Pieces	ITEM			
						Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Hardened steel pin for ASTRAL TEKNO • Key differ: 0.48 mm. 	1	5,05	0,155	1000	1	07571	71	0
		2	5,53	0,155	1000	1	07571	72	0
		3	6,01	0,155	1000	1	07571	73	0
		4	6,49	0,155	1000	1	07571	74	0
		5	6,97	0,155	1000	1	07571	77	0
		6	7,45	0,155	1000	1	07571	78	0
	<ul style="list-style-type: none"> • Hardened steel driver for European profile ASTRAL TEKNO cylinders 	8.00	0,380	1000	1	07572	93	0	
		7.50	0,380	1000	1	07572	94	0	
		7.00	0,380	1000	1	07572	95	0	
		6.50	0,380	1000	1	07572	96	0	
	<ul style="list-style-type: none"> • Hardened steel pin driver for European profile ASTRAL TEKNO cylinders 	5.50	0,380	1000	1	07572	87	0	
	<ul style="list-style-type: none"> • Hardened steel pin driver for cylinders notch position detection for European profile ASTRAL TEKNO cylinders 	5.50	0,380	1000	1	07572	88	0	
	<ul style="list-style-type: none"> • Steel driver for rim and various cylinders from ASTRAL TEKNO 	1.44	0,380	1000	1	07572	71	0	
		5.50	0,380	1000	1	07572	72	0	
		5.00	0,380	1000	1	07572	73	0	
		4.50	0,380	1000	1	07572	77	0	
		4.00	0,380	1000	1	07572	78	0	
	<ul style="list-style-type: none"> • Hardened steel pin driver for cylinders notch position detection for rim and various ASTRAL TEKNO cylinders 	5/6	0,380	1000	1	07572	75	0	
	<ul style="list-style-type: none"> • Hardened steel pin for key notch detection for Astral Tekno cylinders 	-	5,30	0,241	1000	1	07571	93	0
	<ul style="list-style-type: none"> • Hardened steel pin for key back detection for Astral Tekno cylinders 	-	4,70	0,241	1000	1	07571	94	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57010, 57014, 57015, 57019, 57028, 57033	0,180	1	1	07590	01	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57020, 57024	0,255	1	1	07590	05	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00110.00.1 	57060	0,245	1	1	07590	10	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57210, 57211, 57215, 57217, 57800	0,120	1	1	07590	12	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	1 57410 30 1, 1 57415 30 1, 57220, 57223, 57225, 57226	0,120	1	1	07590	15	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57230	0,170	1	1	07590	18	0













Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57250, 57251, 57254, 57255, 57256, 57259, 57260, 57265	0,160	1	1	07590	21	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	17352, 17353, 17357, 17358, 57013, 57016, 57030, 57035, 57312, 57313, 57317, 57318, 57320, 57325, 57330, 57333, 57335, 57336, 57352, 57353, 57357, 57358, 57360, 57365, 57370, 57375	0,142	1	1	07590	23	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00121.00.2 	57121	0,170	1	1	07590	24	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.1 	1 57115 60 1, 1 57125 60 1, 1 57135 60 1, 57500, 57502, 57505, 57507, 57510, 57512, 57515, 57517, 57520, 57525, 57530, 57535	0,185	1	1	07590	25	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.1 	1 57110 60 1, 1 57120 60 1, 1 57130 60 1	0,185	1	1	07590	26	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.2 	1 57110 60 2, 1 57120 60 2, 1 57130 60 2	0,195	1	1	07590	27	0

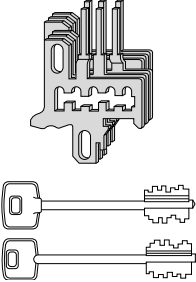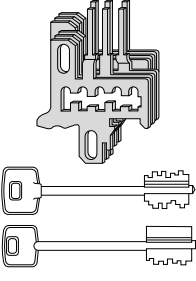Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.2 	1 57115 60 2, 1 57125 60 2, 1 57135 60 2	0,170	1	1	07590	28	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00123.00.1 • 1 service key item 1.00120.00.1 	57501, 57506, 57511, 57516, 57518, 57521, 57526, 57536	0,213	1	1	07590	29	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00123.00.1 • 1 construction key item 1.00120.00.1 	57501, 57506, 57511, 57516, 57518, 57520, 57521, 57526, 57536	0,210	1	1	07590	30	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.1 	1 57155 60 1, 1 57165 60 1, 1 57175 60 1, 1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,210	1	1	07590	35	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.1 	1 57150 60 1, 1 57160 60 1, 1 57170 60 1	0,200	1	1	07590	36	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.2 	1 57150 60 2, 1 57160 60 2, 1 57170 60 2	0,233	1	1	07590	37	0	

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.2 	1 57155 60 2, 1 57165 60 2, 1 57175 60 2	0,212	1	1 07590 38 0			
	<ul style="list-style-type: none"> • Set of steel levers • 2 keys item 1.00101.00.2 	1 57409 30 1, 1 57411 30 1, 1 57416 30 1	0,100	1	1 07590 45 0			
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57010, 57015	0,152	1	1 07591 01 0			
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57020	0,246	1	1 07591 05 0			
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57210, 57211, 57215, 57800	0,100	1	1 07591 12 0			
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	1 57410 30 1, 1 57415 30 1, 57220, 57223, 57225, 57226	0,100	1	1 07591 15 0			

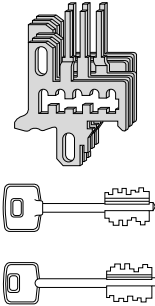Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57250, 57255,	0,154	1	1	07591	21	0	
		57260, 57265							
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00122.00.1 	57500, 57505,	0,202	1	1	07591	29	0	
		57510, 57515, 57517, 57520, 57525, 57535							
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00122.00.1 • 1 service key item 1.00121.00.1 	57501, 57506,	0,100	1	1	07591	39	0	
		57511, 57516, 57518, 57521, 57526, 57536							

Type	Description	For series/item	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Assembly kit for: European profile cylinders Rim cylinders Padlocks item 1.22010.50/60 and 1.26020.50/60 Pins diameter 2.8 mm. 	0G300, 08300, 08700	3,370	1	1	07550	01	0	
	<ul style="list-style-type: none"> Assembly kit for: Padlocks item 1.22010.30/40 Pins diameter 2.8 mm. 	1 22010 30 0, 1 22010 40 0	2,400	1	1	07550	02	0	
	<ul style="list-style-type: none"> Assembly kit for: Steel padlocks series 28050, 28350, 28550 Brass padlocks item 1.22010.50/60 and 1.26020.50/60 Pins diameter 2.8 mm. 	1 22010 50 0, 1 22010 60 0, 1 26020 50 0, 1 26020 60 0, 28050, 28350, 28550	2,500	1	1	07550	04	0	
	<ul style="list-style-type: none"> Assembly kit for: SP and TSP cylinders Pins diameter 2.8 mm. 	08810, 08815	2,900	1	1	07550	05	0	
	<ul style="list-style-type: none"> Assembly kit for: ASTRAL and ASIX cylinders 	0A310, 0E300,	3,170	1	1	07550	08	0	
	<ul style="list-style-type: none"> Assembly kit for Astral Tekno cylinders 	0M300	3,170	1	1	07550	10	0	
	<ul style="list-style-type: none"> Dummy plug Holes spacing: 4 mm. 	0G300, 02500, 08310, 08710	0,660	1	1	07559	01	0	
	<ul style="list-style-type: none"> Spring retaining shoe 	0G300, 08310, 08710	0,030	1	1	07559	02	0	
		0A300, 0E300, 0M300	0,015	1	1	07559	62	0	

Type	Description	For series/item	Kg		Pieces		ITEM						
			Unit weight				Type	Dim.	Hand	Fin.	Pers.	Spec.	
	• Spring pressing blade		0,050		1	1	07559	03	0				
		0A300, 0E300, 0M300	0,018		1	1	07559	63	0				
	• Circlip pliers • Circlip pliers Astral Tekno cylinders		0,190		1	1	07559	04	0				
			0,190		1	1	07559	42	0				
	• Tweezers		0,010		1	1	07559	05	0				
	• Spring retaining bar for rim cylinders		0,105		1	1	07559	06	0				
	• Testing tool	1 22010 50 0	0,025		1	1	07559	07	0				
	• Set of depth keys item 01310 (6 pieces)		0,061		1	1	07559	09	0				
	• Testing tool	1 22010 40 0	0,025		1	1	07559	11	0				
	• Set of depth keys item 01410 (6 pieces)		0,046		1	1	07559	12	0				
	• Pin gauge (increment 0.65 mm.)	01310, 01410	0,035		1	1	07559	13	0				
	• Pin gauge (increment 0,44 mm.)	01070	0,035		1	1	07559	48	0				
	• Dummy plug • Holes spacing: 3.5 mm.	08810, 08815	0,660		1	1	07559	19	0				
	• Pin gauge (increment 0.5 mm.)	08810, 08815	0,015		1	1	07559	22	0				
	• Set of depth keys item 00450 (8 pieces)	08810, 08815	0,150		1	1	07559	23	0				

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	• Butterfly-type spring retaining shoe for cylinders with knob		0,050 1	1	07559	24	0
	• Ball assembling tool for cylinders with knob		0,050 1	1	07559	25	0
	• Knob assembling tool for cylinders with knob		0,050 1	1	07559	26	0
	• Set of depth keys item 01070 (8 pieces)	0G300	0,081 1	1	07559	28	0
	• Spring positioning tool	0A300, 0E300, 0M300	0,055 1	1	07559	80	0
	• Dummy plug	0A300, 0E300, 0M300	2,750 1	1	07559	81	0
	• Set of depth keys Astral item 00620	0A300	0,061 1	1	07559	83	0
	• Key biting check kit, for Astral cylinder keys	0A300	0,015 1	1	07559	84	0
	• Spring positioning tool	0G300, 08310, 08710	0,080 1	1	07559	85	0



ALLEGION™

C3000

Cylinders
with traditional
protected keys.



Education




Residential



Commercial



Healthcare



Hospitality

C3000 S and C3000 cylinders.



CYLINDER SECURITY

The technical features below refer to cylinders C3000 and C3000 S where specified.

Attack Resistance

- High resistance to pulling and tearing for the **C3000 S** cylinder, thanks to the Snap Resistant feature, a dual-material steel core visible when the cylinder is installed on the door.
- High resistance to bumping or percussion, thanks to the BKP (Bump Key Power) device.
- High resistance to forced entry using the wax impression technique, thanks to the BKP device and the special configuration of the springs.
- High drill resistance, thanks to the hardened steel key biting system and inserts for the **C3000 S** cylinder.
- Push resistance due to the projecting cam.

KEY SECURITY

Key Related Security

- Key protected by 3D Trade Mark for effective protection against illegal key duplication.
- Security Card for authorised key duplication by CISA and CISA authorised centres.
- Over 240,000 possible combinations or different keys.

Master Keying Potential

The 6-pin key biting system offers excellent access management potential. E.g.: 15,000 different cylinders with one master key.

RELIABILITY

Durability

- Tested for over 100,000 cycles.

PATENTS AND CERTIFICATIONS

- **C3000 S** In compliance with EN 1303:2015 160B0C6D

Attack Resistance: **D**

0	A	B	C	D
---	---	---	---	---

Key Related Security: **6**

1	2	3	4	5	6
---	---	---	---	---	---

Durability: **6**

1	2	3	4	5	6
---	---	---	---	---	---



- **C3000** In compliance with EN 1303: 2015 160B0C6A

Attack Resistance: **A**

0	A	B	C	D
---	---	---	---	---

Key Related Security: **6**

1	2	3	4	5	6
---	---	---	---	---	---

Durability: **6**

1	2	3	4	5	6
---	---	---	---	---	---



- Key protected by 3D Trade Mark no. 1 236 248 and Community Design registered at no. 2669630
- BKP device: patent no. PCT/WO 2007/074163 A1
- **C3000 S** Snap Resistant patent no. EP1583878



APPLICATIONS

C3000 cylinders are the perfect solution for average security applications for apartment buildings. They also offer excellent master keying potential for companies, shopping centres, universities and hospitals, combining access management with protected key duplication.

TECHNICAL FEATURES

Cylinder

- 6-pin key biting system.
- Brass body.
- Brass plugs.
- Self-lubricating sintered DIN steel cam, clutch-type for the **C3000 S**.
- Hardened steel pins.
- Variable shape hardened steel drivers.
- Phosphor bronze and steel springs.

Key

- Paracentral keyway.
- In nickel silver alloy.
- Ergonomic key bow.
- Key blade 12 mm long.
- Numerical code on key bow.
- Key thickness 2..4 mm.
- Depth 0.48 mm.

Finishes

- Standard: nickel-plated brass (fin.12).
- On request: sanded brass (fin.00).

Options on request

- KA, MK, GMK, CE, CA, PP.

Supplied as standard

- 3 keys.
- Security Card.
- Fixing screw.



C3000 S cylinders



TYPE	DESCRIPTION	COMM. DIM.	L	A	B	PINS	KEY ITEM	kg		ITEM						
								UNIT WEIGHT	No. PIECES	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> Double cylinder 	30/30	59.0	29.5	29.5	6	100430 001	0.235	12	1	w	07	0	12		
		30/35	64.0	29.5	34.5	6	100430 001	0.243	12	1	ON3SI	26	0	12		
		35/35	69.0	34.5	34.5	6	100430 001	0.258	12	1	ON3SI	13	0	12		
		40/30	69.0	39.5	39.5	6	100430 001	0.272	12	1	ON3SI	12	0	12		
		30/45	74.0	29.5	44.5	6	100430 001	0.272	12	1	ON3SI	27	0	12		
		35/40	74.0	34.5	39.5	6	100430 001	0.274	12	1	ON3SI	28	0	12		
		30/50	79.0	29.5	49.5	6	100430 001	0.274	12	1	ON3SI	17	0	12		
		35/45	79.0	34.5	44.5	6	100430 001	0.301	12	1	ON3SI	19	0	12		
		40/40	79.0	39.5	39.5	6	100430 001	0.289	12	1	ON3SI	18	0	12		
		30/55	84.0	29.5	54.5	6	100430 001	0.289	12	1	ON3SI	33	0	12		
		35/50	84.0	34.5	49.5	6	100430 001	0.304	12	1	ON3SI	31	0	12		
		40/45	84.0	39.5	44.5	6	100430 001	0.360	12	1	ON3SI	30	0	12		
		30/60	89.0	29.5	59.5	6	100430 001	0.360	12	1	ON3SI	20	0	12		
		35/55	89.0	34.5	54.5	6	100430 001	0.320	12	1	ON3SI	32	0	12		
		40/50	89.0	39.5	49.5	6	100430 001	0.332	12	1	ON3SI	21	0	12		
		45/45	89.0	44.5	44.5	6	100430 001	0.320	12	1	ON3SI	29	0	12		
		30/65	94.0	29.5	64.5	6	100430 001	0.333	12	1	ON3SI	41	0	12		
		35/60	94.0	34.5	59.5	6	100430 001	0.334	6	1	ON3SI	38	0	12		
		40/55	94.0	39.5	54.5	6	100430 001	0.390	6	1	ON3SI	42	0	12		
		45/50	94.0	44.5	49.5	6	100430 001	0.355	6	1	ON3SI	39	0	12		
		30/70	99.0	29.5	69.5	6	100430 001	0.334	6	1	ON3SI	24	0	12		
		35/65	99.0	34.5	64.5	6	100430 001	0.349	6	1	ON3SI	22	0	12		
		40/60	99.0	39.5	59.5	6	100430 001	0.349	6	1	ON3SI	25	0	12		
		45/55	99.0	44.5	54.5	6	100430 001	0.349	6	1	ON3SI	43	0	12		
		50/50	99.0	49.5	49.5	6	100430 001	0.349	6	1	ON3SI	23	0	12		
		40/65	104.0	39.5	64.5	6	100430 001	0.349	6	1	ON3SI	44	0	12		
		45/60	104.0	44.5	59.5	6	100430 001	0.349	6	1	ON3SI	54	0	12		
		30/75	104.0	29.5	74.5	6	100430 001	0.349	6	1	ON3SI	56	0	12		
		55/50	104.0	54.5	49.5	6	100430 001	0.400	6	1	ON3SI	64	0	12		
		35/70	104.0	34.5	69.5	6	100430 001	0.378	6	1	ON3SI	49	0	12		
		35/75	109.0	34.5	74.5	6	100430 001	0.349	6	1	ON3SI	57	0	12		
		30/80	109.0	29.5	79.5	6	100430 001	0.402	6	1	ON3SI	37	0	12		
		40/70	109.0	39.5	69.5	6	100430 001	0.378	6	1	ON3SI	35	0	12		
		50/60	109.0	49.5	59.5	6	100430 001	0.378	6	1	ON3SI	36	0	12		
		55/55	109.0	54.5	54.5	6	100430 001	0.420	6	1	ON3SI	70	0	12		
		30/85	114.0	29.5	84.5	6	100430 001	0.420	6	1	ON3SI	77	0	12		
50/65	114.0	49.5	64.5	6	100430 001	0.410	6	1	ON3SI	65	0	12				
55/60	114.0	54.5	59.5	6	100430 001	0.378	6	1	ON3SI	71	0	12				
40/75	114.0	39.5	74.5	6	100430 001	0.410	6	1	ON3SI	59	0	12				
45/70	114.0	44.5	69.5	6	100430 001	0.410	6	1	ON3SI	61	0	12				
45/75	119.0	44.5	74.5	6	100430 001	0.450	6	1	ON3SI	62	0	12				
30/90	119.0	29.5	89.5	6	100430 001	0.450	6	1	ON3SI	52	0	12				
40/80	119.0	39.5	79.5	6	100430 001	0.450	6	1	ON3SI	60	0	12				
60/60	119.0	59.5	59.5	6	100430 001	0.450	6	1	ON3SI	40	0	12				
50/70	119.0	49.5	69.5	6	100430 001	0.450	6	1	ON3SI	66	0	12				
30/100	129.0	29.5	99.5	6	100430 001	0.460	6	1	ON3SI	53	0	12				

	<ul style="list-style-type: none"> Single cylinder with 14 position adjustable cam 	30/10	39.5	29.5	10.0	6	100430 001	0.185	12	1	ON324	02	0	12		
		33/10	32.5	29.5	10.0	6	100430 001	0.185	12	1	ON324	09	0	12		
		35/10	44.5	34.5	10.0	6	100430 001	0.195	12	1	ON324	07	0	12		
		40/10	49.5	39.5	10.0	6	100430 001	0.215	12	1	ON324	03	0	12		
		45/10	54.5	44.5	10.0	6	100430 001	0.225	12	1	ON324	08	0	12		
		50/10	59.5	49.5	10.0	6	100430 001	0.245	12	1	ON324	04	0	12		
		60/10	69.5	59.5	10.0	6	100430 001	0.275	12	1	ON324	05	0	12		
		70/10	79.5	69.5	10.0	6	100430 001	0.305	12	1	ON324	06	0	12		

C3000 S cylinders



TYPE	DESCRIPTION	COMM. DIM.	L	A	B	PINS	KEY ITEM	kg		ITEM						
								UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> Double cylinder pre-set for thumb turn installation On request: thumb turn knobs series 06353, 06355, 06356, 06357 	30/30	59.0	29.5	29.5	6	100430 001	0.244	12	1	ON3S2	07	0	12		
		30/35	64.0	29.5	34.5	6	100430 001	0.264	12	1	ON3S2	26	0	12		
		35/30	64.0	34.5	29.5	6	100430 001	0.259	12	1	ON3S2	81	0	12		
		33/33	65.0	32.5	32.5	6	100430 001	0.267	12	1	ON3S2	10	0	12		
		30/40	69.0	29.5	39.5	6	100430 001	0.279	12	1	ON3S2	82	0	12		
		35/35	69.0	34.5	34.5	6	100430 001	0.279	12	1	ON3S2	13	0	12		
		40/30	69.0	39.5	29.5	6	100430 001	0.279	12	1	ON3S2	12	0	12		
		35/40	74.0	34.5	39.5	6	100430 001	0.294	12	1	ON3S2	28	0	12		
		30/45	74.0	29.5	44.5	6	100430 001	0.294	12	1	ON3S2	27	0	12		
		40/35	74.0	39.5	34.5	6	100430 001	0.294	12	1	ON3S2	83	0	12		
		45/30	74.0	44.5	29.5	6	100430 001	0.294	12	1	ON3S2	91	0	12		
		30/50	79.0	29.5	49.5	6	100430 001	0.318	6	1	ON3S2	17	0	12		
		35/45	79.0	34.5	44.5	6	100430 001	0.309	6	1	ON3S2	19	0	12		
		40/40	79.0	39.5	39.5	6	100430 001	0.309	6	1	ON3S2	18	0	12		
		45/35	79.0	44.5	34.5	6	100430 001	0.309	6	1	ON3S2	85	0	12		
		40/45	84.0	39.5	44.5	6	100430 001	0.324	6	1	ON3S2	30	0	12		
		45/40	84.0	44.5	39.5	6	100430 001	0.324	6	1	ON3S2	84	0	12		
		50/35	84.0	49.5	34.5	6	100430 001	0.324	6	1	ON3S2	94	0	12		
		30/60	89.0	29.5	59.5	6	100430 001	0.353	6	1	ON3S2	20	0	12		
		40/50	89.0	39.5	49.5	6	100430 001	0.350	6	1	ON3S2	21	0	12		
		45/45	89.0	44.5	44.5	6	100430 001	0.347	6	1	ON3S2	29	0	12		
		40/55	94.0	39.5	54.5	6	100430 001	0.355	6	1	ON3S2	42	0	12		
		55/40	94.0	54.5	39.5	6	100430 001	0.367	6	1	ON3S2	98	0	12		
		45/50	94.0	44.5	49.5	6	100430 001	0.367	6	1	ON3S2	39	0	12		
		40/60	99.0	39.5	59.5	6	100430 001	0.367	6	1	ON3S2	25	0	12		
		45/55	99.0	44.5	54.5	6	100430 001	0.370	6	1	ON3S2	43	0	12		
		50/50	99.0	49.5	49.5	6	100430 001	0.370	6	1	ON3S2	23	0	12		
		50/55	104.0	49.5	54.5	6	100430 001	0.398	6	1	ON3S2	70	0	12		
		40/65	104.0	39.5	64.5	6	100430 001	0.384	6	1	ON3S2	44	0	12		
		45/60	104.0	44.5	59.5	6	100430 001	0.400	6	1	ON3S2	54	0	12		
		55/50	104.0	54.5	49.5	6	100430 001	0.400	6	1	ON3S2	64	0	12		
		30/80	109.0	29.5	79.5	6	100430 001	0.400	6	1	ON3S2	37	0	12		
		40/70	109.0	39.5	69.5	6	100430 001	0.400	6	1	ON3S2	35	0	12		
50/60	109.0	49.5	59.5	6	100430 001	0.400	6	1	ON3S2	36	0	12				
60/50	109.0	59.5	49.5	6	100430 001	0.400	6	1	ON3S2	89	0	12				
35/80	114.0	34.5	79.5	6	100430 001	0.400	6	1	ON3S2	58	0	12				
55/60	114.0	54.5	59.5	6	100430 001	0.400	6	1	ON3S2	71	0	12				
45/70	114.0	44.5	69.5	6	100430 001	0.400	6	1	ON3S2	61	0	12				
50/65	114.0	49.5	64.5	6	100430 001	0.400	6	1	ON3S2	65	0	12				
55/65	119.0	54.5	64.5	6	100430 001	0.410	6	1	ON3S2	72	0	12				
65/55	119.0	64.5	54.5	6	100430 001	0.410	6	1	ON3S2	86	0	12				
60/60	119.0	59.5	59.5	6	100430 001	0.410	6	1	ON3S2	40	0	12				

	<ul style="list-style-type: none"> Double cylinder pre-set for thumb turn installation with adjustable shaft To install with protective rose item 1.06458.20 On request: thumb turn knobs series 06353, 06355, 06356, 06357 	30/30	59.0	29.5	29.5	6	100430 001	0.284	6	1	ON3S7	07	0	12		
		35/30	64.0	34.5	29.5	6	100430 001	0.294	6	1	ON3S7	81	0	12		
		40/30	69.0	39.5	29.5	6	100430 001	0.312	6	1	ON3S7	12	0	12		
		45/30	74.0	44.5	29.5	6	100430 001	0.320	6	1	ON3S7	91	0	12		
		50/30	79.0	49.5	29.5	6	100430 001	0.329	6	1	ON3S7	90	0	12		
		55/30	84.0	54.5	29.5	6	100430 001	0.345	6	1	ON3S7	92	0	12		
		60/30	89.0	59.5	29.5	6	100430 001	0.359	6	1	ON3S7	87	0	12		
		65/30	94.0	64.5	29.5	6	100430 001	0.359	6	1	ON3S7	A3	0	12		
		70/30	99.0	69.5	29.5	6	100430 001	0.370	6	1	ON3S7	88	0	12		
		80/30	110.0	79.5	29.5	6	100430 001	0.359	1	1	ON3S7	93	0	12		
		90/30	120.0	89.5	29.5	6	100430 001	0.392	1	1	ON3S7	C6	0	12		
		100/30	130.0	99.5	29.5	6	100430 001	0.398	1	1	ON3S7	C7	0	12		

TYPE	DESCRIPTION	COMM. DIM.	L	A	B	PINS	KEY ITEM	kg		ITEM		Type	Dim.	Hand	Fin.	Pers.	Spec.
								UNIT WEIGHT	NO. PIECES								
	<ul style="list-style-type: none"> Double cylinder 	30/30	59.0	29.5	29.5	6	100430 001	0.235	12	1	ON310	07	0	12			
		30/35	64.0	29.5	34.5	6	100430 001	0.243	12	1	ON310	26	0	12			
		33/33	65.0	32.5	32.5	6	100430 001	0.258	12	1	ON310	10	0	12			
		35/35	69.0	34.5	34.5	6	100430 001	0.272	12	1	ON310	13	0	12			
		40/30	69.0	39.5	29.5	6	100430 001	0.272	12	1	ON310	12	0	12			
		30/45	74.0	29.5	44.5	6	100430 001	0.274	12	1	ON310	27	0	12			
		35/40	74.0	34.5	39.5	6	100430 001	0.274	12	1	ON310	28	0	12			
		30/50	79.0	29.5	49.5	6	100430 001	0.301	12	1	ON310	17	0	12			
		35/45	79.0	34.5	44.5	6	100430 001	0.289	12	1	ON310	19	0	12			
		40/40	79.0	39.5	39.5	6	100430 001	0.289	12	1	ON310	18	0	12			
		30/55	84.0	29.5	54.5	6	100430 001	0.304	12	1	ON310	33	0	12			
		35/50	84.0	34.5	49.5	6	100430 001	0.360	12	1	ON310	31	0	12			
		40/45	84.0	39.5	44.5	6	100430 001	0.360	12	1	ON310	30	0	12			
		30/60	89.0	29.5	59.5	6	100430 001	0.320	12	1	ON310	20	0	12			
		35/55	89.0	34.5	54.5	6	100430 001	0.332	12	1	ON310	32	0	12			
		40/50	89.0	39.5	49.5	6	100430 001	0.320	12	1	ON310	21	0	12			
		45/45	89.0	44.5	44.5	6	100430 001	0.333	12	1	ON310	29	0	12			
		30/65	94.0	29.5	64.5	6	100430 001	0.334	6	1	ON310	41	0	12			
		35/60	94.0	34.5	59.5	6	100430 001	0.390	6	1	ON310	38	0	12			
		40/55	94.0	39.5	54.5	6	100430 001	0.355	6	1	ON310	42	0	12			
		45/50	94.0	44.5	49.5	6	100430 001	0.334	6	1	ON310	39	0	12			
		30/70	99.0	29.5	69.5	6	100430 001	0.349	6	1	ON310	24	0	12			
		35/65	99.0	34.5	64.5	6	100430 001	0.349	6	1	ON310	22	0	12			
		40/60	99.0	39.5	59.5	6	100430 001	0.349	6	1	ON310	25	0	12			
		45/55	99.0	44.5	54.5	6	100430 001	0.349	6	1	ON310	43	0	12			
		50/50	99.0	49.5	49.5	6	100430 001	0.349	6	1	ON310	23	0	12			
		30/75	104.0	29.5	74.5	6	100430 001	0.349	6	1	ON310	56	0	12			
		35/70	104.0	34.5	69.5	6	100430 001	0.349	6	1	ON310	49	0	12			
		40/65	104.0	39.5	64.5	6	100430 001	0.349	6	1	ON310	44	0	12			
		45/60	104.0	44.5	59.5	6	100430 001	0.349	6	1	ON310	54	0	12			
		55/50	104.0	54.5	49.5	6	100430 001	0.349	6	1	ON310	64	0	12			
		30/80	109.0	29.5	79.5	6	100430 001	0.378	6	1	ON310	37	0	12			
		35/75	109.0	34.5	74.5	6	100430 001	0.400	6	1	ON310	57	0	12			
40/70	109.0	39.5	69.5	6	100430 001	0.400	6	1	ON310	35	0	12					
50/60	109.0	49.5	59.5	6	100430 001	0.402	6	1	ON310	36	0	12					
55/55	109.0	54.5	54.5	6	100430 001	0.378	6	1	ON310	70	0	12					
50/65	114.0	49.5	64.5	6	100430 001	0.378	6	1	ON310	65	0	12					
55/60	114.0	54.5	59.5	6	100430 001	0.420	6	1	ON310	71	0	12					
30/85	114.0	29.5	84.5	6	100430 001	0.400	6	1	ON310	77	0	12					
40/75	114.0	39.5	74.5	6	100430 001	0.420	6	1	ON310	59	0	12					
30/90	119.0	29.5	89.5	6	100430 001	0.410	6	1	ON310	52	0	12					
40/80	119.0	39.5	79.5	6	100430 001	0.378	6	1	ON310	60	0	12					
45/75	119.0	44.5	74.5	6	100430 001	0.410	6	1	ON310	62	0	12					
60/60	119.0	59.5	59.5	6	100430 001	0.410	6	1	ON310	40	0	12					








	<ul style="list-style-type: none"> Single cylinder with 14 position adjustable cam 	30/10	39.5	29.5	10.0	6	100430 001	0.185	12	1	ON314	02	0	12			
		33/10	32.5	29.5	10.0	6	100430 001	0.185	12	1	ON314	09	0	12			
		35/10	44.5	34.5	10.0	6	100430 001	0.195	12	1	ON314	07	0	12			
		40/10	49.5	39.5	10.0	6	100430 001	0.215	12	1	ON314	03	0	12			
		45/10	54.5	44.5	10.0	6	100430 001	0.225	12	1	ON314	08	0	12			
		50/10	59.5	49.5	10.0	6	100430 001	0.245	12	1	ON314	04	0	12			
		60/10	69.5	59.5	10.0	6	100430 001	0.275	12	1	ON314	05	0	12			
		70/10	79.5	69.5	10.0	6	100430 001	0.305	12	1	ON314	06	0	12			

TYPE	DESCRIPTION	COMM. DIM.	L	A	B	PINS	CHIAVE ART.	kg		ITEM				
								UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Double cylinder pre-set for thumb turn installation On request: thumb turn knobs series 06353, 06355, 06356, 06357 	30/30	59.0	29.5	29.5	6	100430 001	0.244	12	1	ON312	07	0	12
		30/35	64.0	29.5	34.5	6	100430 001	0.264	12	1	ON312	26	0	12
		35/30	64.0	34.5	29.5	6	100430 001	0.259	12	1	ON312	81	0	12
		33/33	65.0	32.5	32.5	6	100430 001	0.267	12	1	ON312	10	0	12
		30/40	69.0	29.5	39.5	6	100430 001	0.279	12	1	ON312	82	0	12
		35/35	69.0	34.5	34.5	6	100430 001	0.279	12	1	ON312	13	0	12
		40/30	69.0	39.5	29.5	6	100430 001	0.279	12	1	ON312	12	0	12
		35/40	74.0	34.5	39.5	6	100430 001	0.294	12	1	ON312	28	0	12
		30/45	74.0	29.5	44.5	6	100430 001	0.294	12	1	ON312	27	0	12
		40/35	74.0	39.5	34.5	6	100430 001	0.294	12	1	ON312	83	0	12
		45/30	74.0	44.5	29.5	6	100430 001	0.294	12	1	ON312	91	0	12
		30/50	79.0	29.5	49.5	6	100430 001	0.318	6	1	ON312	17	0	12
		35/45	79.0	34.5	44.5	6	100430 001	0.309	6	1	ON312	19	0	12
		40/40	79.0	39.5	39.5	6	100430 001	0.309	6	1	ON312	18	0	12
		45/35	79.0	44.5	34.5	6	100430 001	0.309	6	1	ON312	85	0	12
		40/45	84.0	39.5	44.5	6	100430 001	0.324	6	1	ON312	30	0	12
		45/40	84.0	44.5	39.5	6	100430 001	0.324	6	1	ON312	84	0	12
		30/60	89.0	29.5	59.5	6	100430 001	0.353	6	1	ON312	20	0	12
		40/50	89.0	39.5	49.5	6	100430 001	0.350	6	1	ON312	21	0	12
		45/45	89.0	44.5	44.5	6	100430 001	0.347	6	1	ON312	29	0	12
		40/55	94.0	39.5	54.5	6	100430 001	0.355	6	1	ON312	42	0	12
		55/40	94.0	54.5	39.5	6	100430 001	0.367	6	1	ON312	98	0	12
		45/50	94.0	44.5	49.5	6	100430 001	0.367	6	1	ON312	39	0	12
		40/60	99.0	39.5	59.5	6	100430 001	0.367	6	1	ON312	25	0	12
		45/55	99.0	44.5	54.5	6	100430 001	0.370	6	1	ON312	43	0	12
		50/50	99.0	49.5	49.5	6	100430 001	0.370	6	1	ON312	23	0	12
		45/60	104.0	44.5	59.5	6	100430 001	0.398	6	1	ON312	54	0	12
		55/50	104.0	54.5	49.5	6	100430 001	0.384	6	1	ON312	64	0	12
		30/80	109.0	29.5	79.5	6	100430 001	0.400	6	1	ON312	37	0	12
		40/70	109.0	39.5	69.5	6	100430 001	0.400	6	1	ON312	35	0	12
50/60	109.0	49.5	59.5	6	100430 001	0.400	6	1	ON312	36	0	12		


	<ul style="list-style-type: none"> Double cylinder pre-set for thumb turn installation with adjustable shaft To install with protective rose item 1.06458.20 On request: thumb turn knobs series 06353, 06355, 06356, 06357 	30/30	59.0	29.5	29.5	6	100430 001	0.284	6	1	ON317	07	0	12
		35/30	64.0	34.5	29.5	6	100430 001	0.294	6	1	ON317	81	0	12
		40/30	69.0	39.5	29.5	6	100430 001	0.312	6	1	ON317	12	0	12
		45/30	74.0	44.5	29.5	6	100430 001	0.320	6	1	ON317	91	0	12
		50/30	79.0	49.5	29.5	6	100430 001	0.329	6	1	ON317	90	0	12
		55/30	84.0	54.5	29.5	6	100430 001	0.345	6	1	ON317	92	0	12
		60/30	89.0	59.5	29.5	6	100430 001	0.359	6	1	ON317	87	0	12
		65/30	94.0	64.5	29.5	6	100430 001	0.359	6	1	ON317	A3	0	12
		70/30	99.0	69.5	29.5	6	100430 001	0.370	6	1	ON317	88	0	12
		80/30	110.0	79.5	29.5	6	100430 001	0.359	1	1	ON317	93	0	12

C3000 cylinders




TYPE	DESCRIPTION	FOR LOCKS SERIES	L	PINS	KEY ITEM	kg	NO. PIECES	ITEM					
						UNIT WEIGHT		Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> Cylinder 	1A610, 11610, 50010, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	6	6	100430 001	0.204	6	1	0N510	00	0	12	
	<ul style="list-style-type: none"> Tubular cylinder 	1A611, 11611, 50111, 50131, 50181, 50481, 54316, 54341	55	6	100430 001	0.204	6	1	0N210	55	0	12	
	<ul style="list-style-type: none"> Pair of cylinders with external tubular cylinder 	50121, 50126, 50141, 50161, 50171, 50211, 50211, 50221, 50421, 50451, 50471, 50521, 50571	50.0	6	100430 001	0.295	6	1	0N116	00	0	12	
		11721, 11921	55.0	6	100430 001	0.295	6	1	0N149	00	0	12	
	<ul style="list-style-type: none"> Pair of cylinders with external tubular cylinder 	1A631, 1A721, 1A731	55.0	6	100430 001	0.295	6	1	0N150	00	0	12	
	<ul style="list-style-type: none"> Steel plug for padlocks 2 keys Pickled brass body Complete with plate item 1.07573.08.0 		6	6	100430 001	0.117	6	1	0N610	00	0		
	<ul style="list-style-type: none"> Key extraction to position (0) Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to be ordered separately) 		17	6	100430 001	0.117	6	1	0N410	00	0	12	
	<ul style="list-style-type: none"> Nickel silver alloy 3D trademark Paracentral keyway <p>KEYBLANK DISTRIBUTION IS REGULATED BY CONTRACT</p>		6	6		0.117	50	1	00430	00	1		


Drawings and dimensions.




ON310 - ON351




ON314 - ON324

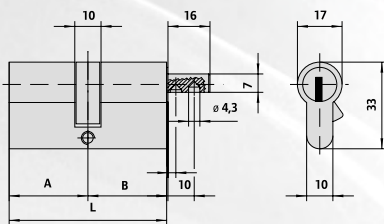


ON312 - ON352

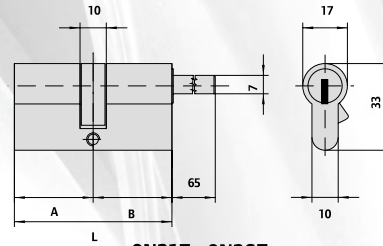


ON317 - ON357

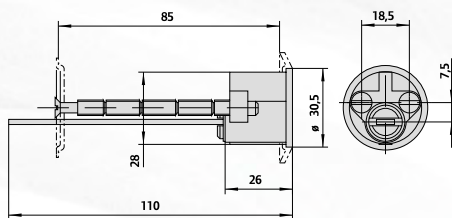


ON510



ON210



ON610

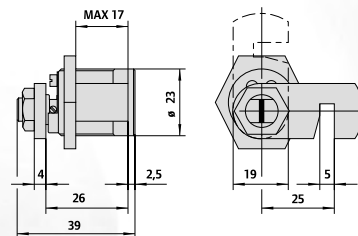

ON410

SPECIFICATIONS

C3000 CYLINDERS

- Controlled duplication system: traditional key in nickel silver alloy protected by Trade Mark and can only be duplicated at CISA C3000 Centres or CISA.
- Certified protection against pulling and tearing thanks to SNAP RESISTANT patented technology (**C3000 S**): bi-material segment pack in hardened steel and stainless steel central segment visible from the outside on both sides of the cylinder.
- Certified protection against bumping, thanks to BKP patented technology.
- Certified drill resistance, thanks to the key biting system in hardened steel and the additional inserts of **C3000 S**.

Standards

- C3000 S**: in compliance with EN 1305:2015

Key Related Security: 6
Attack Resistance: D
Durability: 6

- C3000**: in compliance with EN 1305:2015

Key Related Security: 6
Attack Resistance: A
Durability: 6

Technical features

Cylinder:

- 6-pin key biting system
- Brass body with segment pack along the whole length of the cylinder **C3000 S**
- Brass plugs
- Hardened steel pins and drivers
- Phosphor bronze and steel springs

Keys:

- Paracentral keyway protected by 3D Trade Mark
- In nickel silver alloy with ergonomic grip
- Key blade 12 mm long
- Numerical code on key bow

Supplied as standard

- 3 keys
- Security Card
- Fixing screw

Finishes

- Nickel-plated satin brass
- Sanded brass



Patents

- Key protected by 3D Trade Mark no. 1 236 248 and Community Design registered at no. 2669630
- Snap Resistance: Europe EP1583878, Russia RU2361989
- BKP device: patent no. PCT/WO 2007/074163 A1



AP4S  TM
SYSTEM

AP4 S cylinder

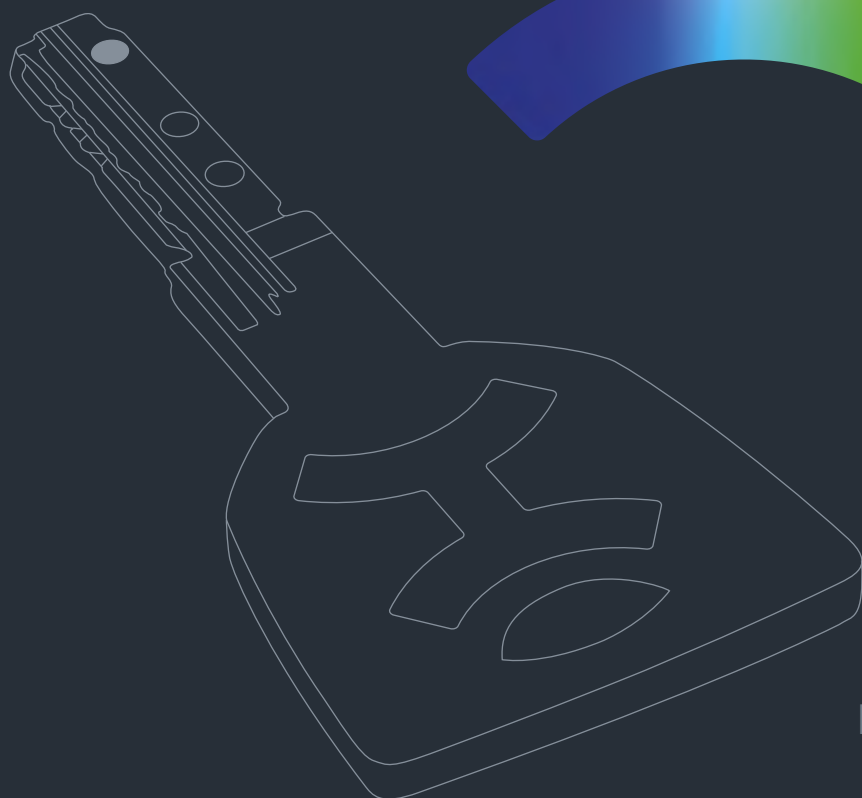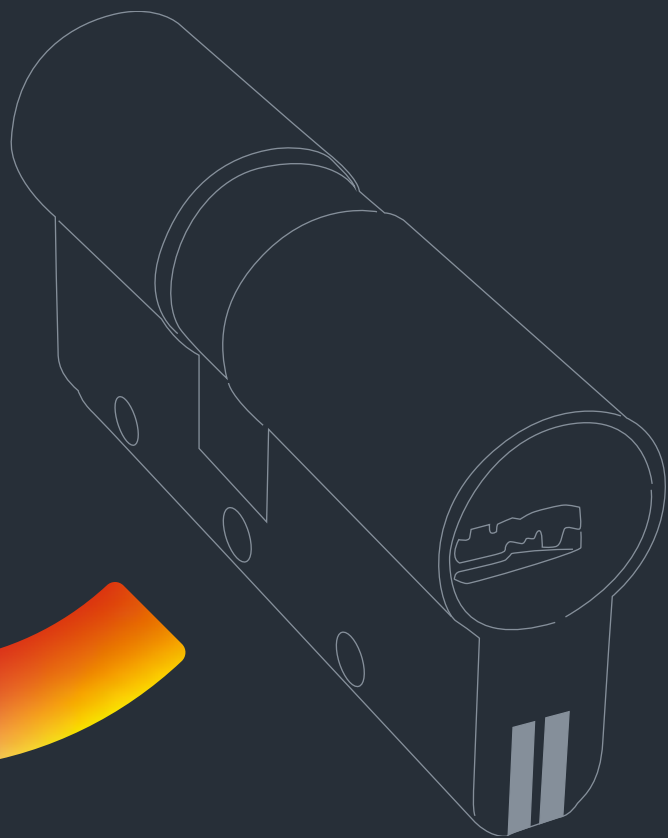

Patented System
Protected Duplication by 3D[®]
Made in Italy



Key

SECURITY

Key Related Security

- **PATENT PCT/IT2013/000297-AP4**
Protected key duplication thanks to **AP4 System technology**, keys can only be duplicated at CISA Solution Partners or CISA
- **3D TRADE MARK NO. 1276648**
Greater control over key cloning, **thanks to the protected mobile element**, providing **unlimited** protection over time.
- **Security Card** for authorised key duplication only at CISA Solution Partners and CISA.
- **11-pin key bitting system on 3 rows.**
Offers excellent access management potential.
E.g. 132,000 different cylinders with one master key
- Up to 80 million possible combinations or **different keys** (mechanical profiles included).

TECHNICAL FEATURES


- Flat reversible.
- In nickel silver alloy.
- Numerical code on key bow.
- Key thickness 2.9 mm.
- Depth 0.48 mm.
- Compatible with protective roses.
- Key bow can be personalised with an insert available in 15 different colours.



In compliance with EN 1303:2015 160B0C6D♦1.

Key Related Security: 6					Attack Resistance: D					Durability: 6			
1	2	3	4	5	6	0	A	B	C	D	4	5	6



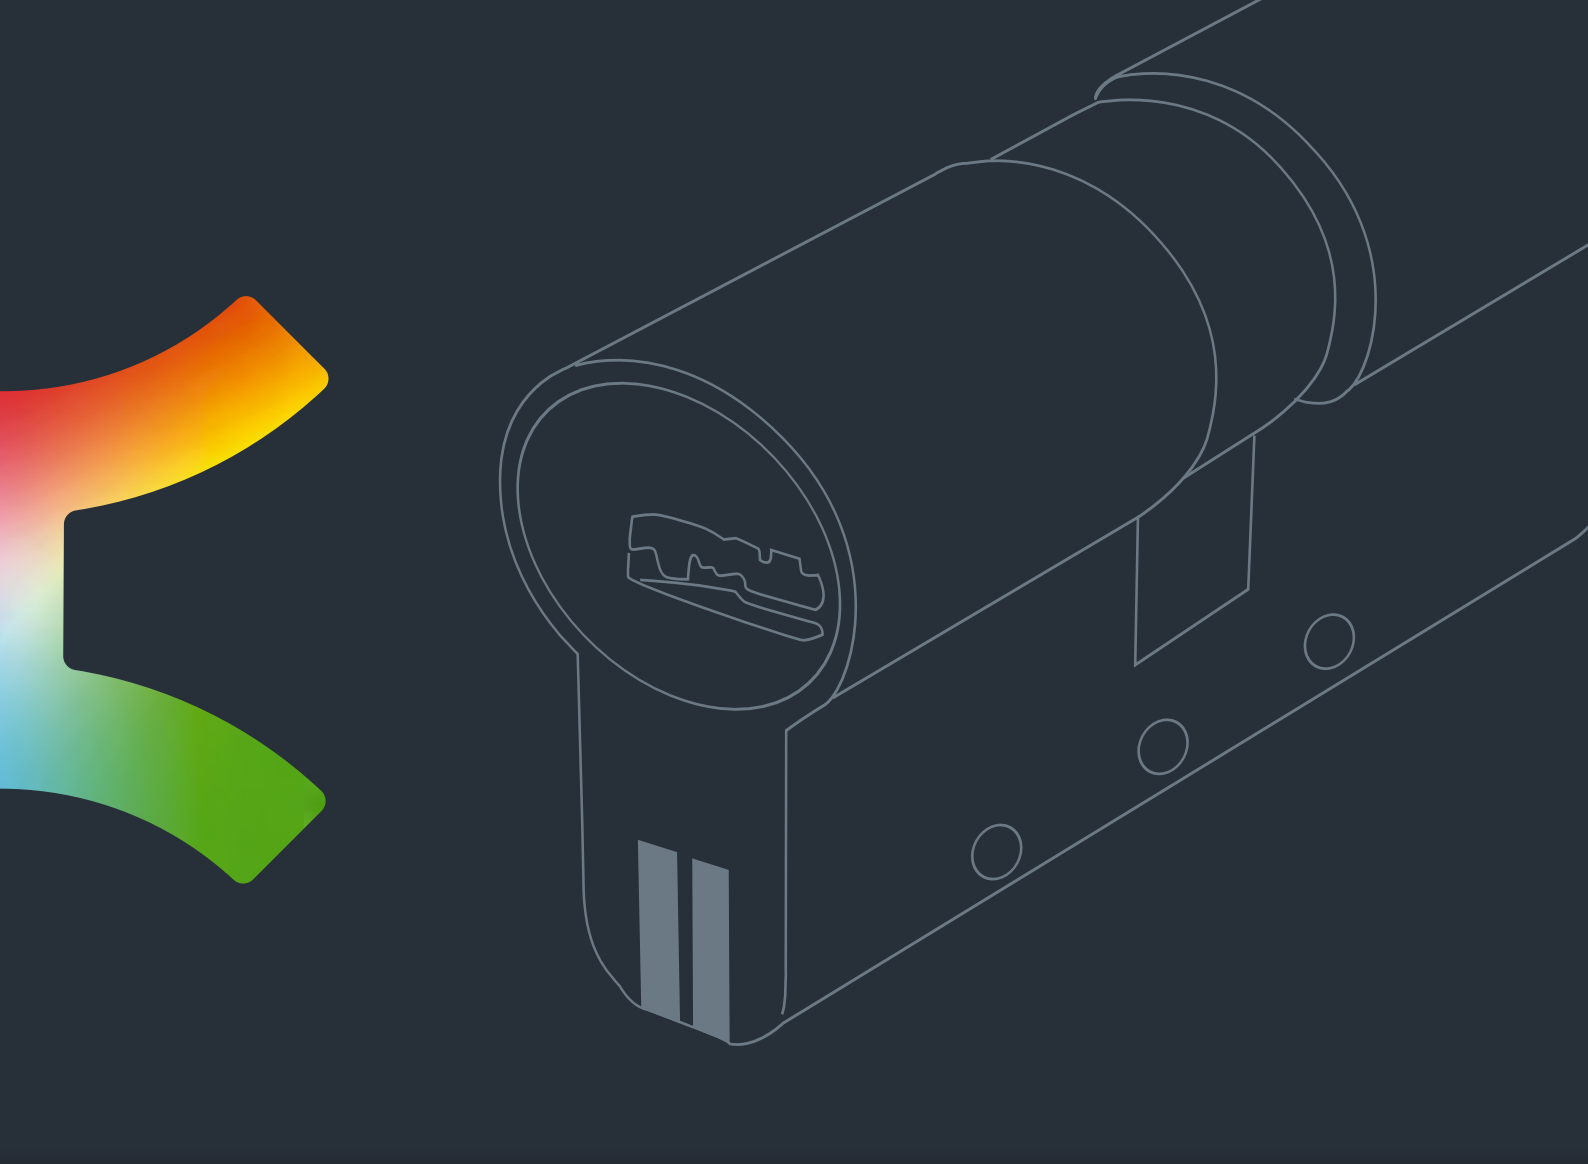

Cylinder

SECURITY

Attack resistance



- **SNAP RESISTANT PATENT EP1583878**
Certified resistance against breaking and pulling, thanks to **patented SNAP RESISTANT technology**: bi-material segment pack in hardened steel and stainless steel central segment visible from the outside on both sides of the cylinder



- **BKP PATENT PCT/WO2007/074163A1.**
Certified protection against bumping, thanks to **BKP patented technology** (Bump Key Power)



- **PATENT PCT/IT2016/000093**
High resistance to **picking**, thanks to the **system** with new special drivers.
- Certified drill resistance, thanks to the **key biting system in hardened steel**.
- High resistance to forced entry using the impression or wax technique, thanks to the special configuration of the springs.

TECHNICAL FEATURES

- 12-pin key-biting system (6 active, 5 passive, 1 patented pin).
- Brass body with segment pack along the whole length of the cylinder (excluding single cylinders, various cylinders and rim cylinders).
- Brass plugs.
- Clutch-type cam in self-lubricating sintered DIN steel.
- Hardened steel pins and drivers.
- Phosphor bronze and steel springs.
- 100,000 cycles (in compliance with EN 1303: 2015 Durability: 6).

Finishes

- Standard: nickel-plated satin brass (fin. 12).
- On request: polished brass (fin. 66).

In compliance with EN 1303:2015 160B0C6D♦1.









Key Related Security: 6						Attack Resistance: D				Durability: 6			
1	2	3	4	5	6	0	A	B	C	D	4	5	6










Type	Description	Comm. dim.			Plns	Key item	Kg	Unit W	Pieces	ITEM			
		L	A	B						Type	Dim.	Hand	Fin.
<p>• Double cylinder with clutch system</p>	30/30	59.0	29.5	29.5	12	100810 00 0	0.235	1	1	OP3SI	07	0	12
	28/34	61.2	27.7	33.5	12	100810 00 0	0.235	1	1	OP3SI	06	0	12
	30/35	64.0	29.5	34.5	12	100810 00 0	0.243	1	1	OP3SI	26	0	12
	33/33	65.0	32.5	32.5	12	100810 00 0	0.258	1	1	OP3SI	10	0	12
	35/35	69.0	34.5	34.5	12	100810 00 0	0.272	1	1	OP3SI	13	0	12
	40/30	69.0	39.5	29.5	12	100810 00 0	0.272	1	1	OP3SI	12	0	12
	30/45	74.0	29.5	44.5	12	100810 00 0	0.274	1	1	OP3SI	27	0	12
	35/40	74.0	34.5	39.5	12	100810 00 0	0.274	1	1	OP3SI	28	0	12
	30/50	79.0	29.5	49.5	12	100810 00 0	0.301	1	1	OP3SI	17	0	12
	35/45	79.0	34.5	44.5	12	100810 00 0	0.289	1	1	OP3SI	19	0	12
	40/40	79.0	39.5	39.5	12	100810 00 0	0.289	1	1	OP3SI	18	0	12
	30/55	84.0	29.5	54.5	12	100810 00 0	0.304	1	1	OP3SI	33	0	12
	35/50	84.0	34.5	49.5	12	100810 00 0	0.360	1	1	OP3SI	31	0	12
	40/45	84.0	39.5	45.5	12	100810 00 0	0.360	1	1	OP3SI	30	0	12
	30/60	89.0	29.5	59.5	12	100810 00 0	0.320	1	1	OP3SI	20	0	12
	35/55	89.0	34.5	54.5	12	100810 00 0	0.332	1	1	OP3SI	32	0	12
	40/50	89.0	39.5	49.5	12	100810 00 0	0.320	1	1	OP3SI	21	0	12
	45/45	89.0	44.5	44.5	12	100810 00 0	0.333	1	1	OP3SI	29	0	12
	30/65	94.0	29.5	64.5	12	100810 00 0	0.334	1	1	OP3SI	41	0	12
	35/60	94.0	34.5	59.5	12	100810 00 0	0.390	1	1	OP3SI	38	0	12
	40/55	94.0	39.5	54.5	12	100810 00 0	0.355	1	1	OP3SI	42	0	12
	45/50	94.0	44.5	49.5	12	100810 00 0	0.334	1	1	OP3SI	39	0	12
	30/70	99.0	29.5	69.5	12	100810 00 0	0.349	1	1	OP3SI	24	0	12
	35/65	99.0	34.5	64.5	12	100810 00 0	0.349	1	1	OP3SI	22	0	12
	40/60	99.0	39.5	59.5	12	100810 00 0	0.349	1	1	OP3SI	25	0	12
	45/55	99.0	44.5	54.5	12	100810 00 0	0.349	1	1	OP3SI	43	0	12
	50/50	99.0	49.5	49.5	12	100810 00 0	0.349	1	1	OP3SI	23	0	12
	30/75	104.00	29.5	74.5	12	100810 00 0	0.360	1	1	OP3SI	56	0	12
	35/70	104.00	34.5	69.5	12	100810 00 0	0.360	1	1	OP3SI	49	0	12
	45/60	104.00	44.5	59.5	12	100810 00 0	0.360	1	1	OP3SI	54	0	12
	55/50	104.00	54.5	49.5	12	100810 00 0	0.360	1	1	OP3SI	64	0	12
	30/80	109.0	29.5	79.5	12	100810 00 0	0.378	1	1	OP3SI	37	0	12
	35/75	109.0	34.5	74.4	12	100810 00 0	0.378	1	1	OP3SI	57	0	12
	40/70	109.0	39.5	69.5	12	100810 00 0	0.400	1	1	OP3SI	35	0	12
	50/60	109.0	49.5	59.5	12	100810 00 0	0.400	1	1	OP3SI	36	0	12
55/55	109.0	54.5	54.5	12	100810 00 0	0.400	1	1	OP3SI	70	0	12	
30/85	114.0	29.5	84.5	12	100810 00 0	0.420	1	1	OP3SI	77	0	12	
40/75	114.0	39.5	74.5	12	100810 00 0	0.420	1	1	OP3SI	59	0	12	
45/70	114.0	44.5	69.5	12	100810 00 0	0.420	1	1	OP3SI	61	0	12	
50/65	114.0	49.5	64.5	12	100810 00 0	0.420	1	1	OP3SI	65	0	12	
55/60	114.0	54.5	59.5	12	100810 00 0	0.420	1	1	OP3SI	71	0	12	
30/90	119.0	29.5	89.5	12	100810 00 0	0.450	1	1	OP3SI	52	0	12	
40/80	119.0	39.5	79.5	12	100810 00 0	0.450	1	1	OP3SI	60	0	12	
50/70	119.0	49.5	69.5	12	100810 00 0	0.450	1	1	OP3SI	66	0	12	
60/60	119.0	59.5	59.5	12	100810 00 0	0.450	1	1	OP3SI	40	0	12	
30/100	129.0	29.5	99.5	12	100810 00 0	0.450	1	1	OP3SI	53	0	12	


<p>• Single cylinder with 8-position adjustable cam</p>	30/10	39.5	29.5	10.0	12	100810 00 0	0.185	1	1	OP3I4	02	0	12
	35/10	44.5	34.5	10.0	12	100810 00 0	0.195	1	1	OP3I4	07	0	12
	40/10	49.5	39.5	10.0	12	100810 00 0	0.215	1	1	OP3I4	03	0	12
	45/10	54.5	44.5	10.0	12	100810 00 0	0.225	1	1	OP3I4	08	0	12
	50/10	59.5	49.5	10.0	12	100810 00 0	0.245	1	1	OP3I4	04	0	12
	60/10	69.5	59.5	10.0	12	100810 00 0	0.275	1	1	OP3I4	05	0	12
	65/10	74.5	64.5	10.0	12	100810 00 0	0.290	1	1	OP3I4	21	0	12
	70/10	79.5	69.5	10.0	12	100810 00 0	0.305	1	1	OP3I4	06	0	12
	80/10	89.5	79.5	10.0	12	100810 00 0	0.330	1	1	OP3I4	20	0	12
	95/10	104.5	94.5	10.0	12	100810 00 0	0.380	1	1	OP3I4	13	0	12

Type	Description	Comm. dim.	L	A	B	Plns	Key item	Kg	Unit W	Pieces	ITEM				
											Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Double cylinder pre-set for thumb turn shaft • ON REQUEST: Thumbturns item 06353, 06355, 06356, 06357 	30/30	59.0	29.5	29.5	12	100810 00 0	0.244	1	1	OP3S2 07 0 12				
		30/35	64.0	29.5	34.5	12	100810 00 0	0.264	1	1	OP3S2 26 0 12				
		35/30	64.0	34.5	29.5	12	100810 00 0	0.259	1	1	OP3S2 81 0 12				
		33/33	65.0	32.5	32.5	12	100810 00 0	0.267	1	1	OP3S2 10 0 12				
		30/40	69.0	29.5	39.5	12	100810 00 0	0.279	1	1	OP3S2 82 0 12				
		35/35	69.0	34.5	34.5	12	100810 00 0	0.279	1	1	OP3S2 13 0 12				
		40/30	69.0	39.5	29.5	12	100810 00 0	0.279	1	1	OP3S2 12 0 12				
		35/40	74.0	34.0	39.5	12	100810 00 0	0.294	1	1	OP3S2 28 0 12				
		30/45	74.0	29.0	44.5	12	100810 00 0	0.294	1	1	OP3S2 27 0 12				
		40/35	74.0	39.5	34.5	12	100810 00 0	0.294	1	1	OP3S2 83 0 12				
		45/30	74.0	44.5	29.5	12	100810 00 0	0.294	1	1	OP3S2 91 0 12				
		30/50	79.0	29.5	49.5	12	100810 00 0	0.318	1	1	OP3S2 17 0 12				
		35/45	79.0	34.5	44.5	12	100810 00 0	0.309	1	1	OP3S2 19 0 12				
		40/40	79.0	39.5	39.5	12	100810 00 0	0.309	1	1	OP3S2 18 0 12				
		45/35	79.0	44.5	34.5	12	100810 00 0	0.309	1	1	OP3S2 85 0 12				
		40/45	84.0	39.5	44.5	12	100810 00 0	0.324	1	1	OP3S2 30 0 12				
		45/40	84.0	44.5	39.5	12	100810 00 0	0.324	1	1	OP3S2 84 0 12				
		30/60	89.0	29.5	59.5	12	100810 00 0	0.353	1	1	OP3S2 20 0 12				
		40/50	89.0	39.5	49.5	12	100810 00 0	0.350	1	1	OP3S2 21 0 12				
		45/45	89.0	44.5	44.5	12	100810 00 0	0.347	1	1	OP3S2 29 0 12				
		40/55	94.0	39.5	54.5	12	100810 00 0	0.355	1	1	OP3S2 42 0 12				
		55/40	94.0	54.5	39.5	12	100810 00 0	0.367	1	1	OP3S2 98 0 12				
		45/50	94.0	44.5	49.5	12	100810 00 0	0.367	1	1	OP3S2 39 0 12				
		40/60	99.0	39.5	59.5	12	100810 00 0	0.367	1	1	OP3S2 25 0 12				
		45/55	99.0	44.5	54.5	12	100810 00 0	0.370	1	1	OP3S2 43 0 12				
		50/50	99.0	49.5	49.5	12	100810 00 0	0.370	1	1	OP3S2 23 0 12				
		40/65	104.0	39.5	64.5	12	100810 00 0	0.384	1	1	OP3S2 44 0 12				
		45/60	104.0	44.5	59.5	12	100810 00 0	0.384	1	1	OP3S2 54 0 12				
		55/50	104.0	54.5	49.5	12	100810 00 0	0.384	1	1	OP3S2 64 0 12				
		30/80	109.0	29.5	79.5	12	100810 00 0	0.400	1	1	OP3S2 37 0 12				
35/75	109.0	34.5	74.5	12	100810 00 0	0.400	1	1	OP3S2 57 0 12						
40/70	109.0	39.5	69.5	12	100810 00 0	0.400	1	1	OP3S2 35 0 12						
50/60	109.0	49.5	59.5	12	100810 00 0	0.400	1	1	OP3S2 36 0 12						
45/70	114.0	44.5	69.5	12	100810 00 0	0.400	1	1	OP3S2 61 0 12						
50/65	114.0	49.5	64.5	12	100810 00 0	0.400	1	1	OP3S2 65 0 12						
	<ul style="list-style-type: none"> • Double cylinder pre-set for thumb turn adjustable shaft • To install with protective rose item 1.06458.20 • ON REQUEST: Thumbturns item 06353, 06355, 06356, 06357 	30/30	59.0	29.5	29.5	12	100810 00 0	0.284	1	1	OP3S7 07 0 12				
		35/30	64.0	34.5	29.5	12	100810 00 0	0.294	1	1	OP3S7 81 0 12				
		40/30	69.0	39.5	29.5	12	100810 00 0	0.312	1	1	OP3S7 12 0 12				
		45/30	74.0	44.5	29.5	12	100810 00 0	0.320	1	1	OP3S7 91 0 12				
		50/30	79.0	49.5	29.5	12	100810 00 0	0.329	1	1	OP3S7 90 0 12				
		55/30	84.0	54.5	29.5	12	100810 00 0	0.345	1	1	OP3S7 92 0 12				
		60/30	89.0	59.5	29.5	12	100810 00 0	0.359	1	1	OP3S7 87 0 12				
		65/30	94.0	64.5	29.5	12	100810 00 0	0.359	1	1	OP3S7 A3 0 12				
		70/30	99.0	69.5	29.5	12	100810 00 0	0.370	1	1	OP3S7 88 0 12				
		80/30	110.0	79.5	29.5	12	100810 00 0	0.380	1	1	OP3S7 93 0 12				
		90/30	120	89.5	29.5	12	100810 00 0	0.392	1	1	OP3S7 C6 0 12				
		100/30	130	99.5	29.5	12	100810 00 0	0.398	1	1	OP3S7 C7 0 12				
Type	Description						Key item	Pieces	ITEM						
	• AP4 key blank, PG profile						100810 00 0	50	1	00810 00 0					
	• AP4 key blank, pre-drilled PE profile						100815 00 0	50	1	00815 00 0 PP					

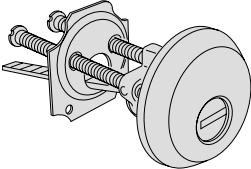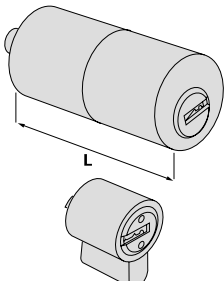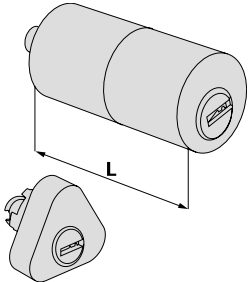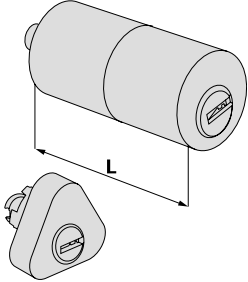
Type	Description	For locks series	L	Plins	Key item	Kg	Unit W	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	12	12	100810 00 0	0.204	1	1	1	OP510	00	0	12
	• Cylinder with nickel-plated anti-pulling and drill resistant protective rose		12	12	100810 00 0	0.325	1	1	1	OP510	10	0	12
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50.0	12	100810 00 0	0.215	1	1	1	OP210	55	0	12
	• Cylinder set with tubular external cylinder	1A631, 1A721, 1A731	50.0	12	100810 00 0	0.295	1	1	1	OP150	00	0	12
	• Cylinder set with tubular external cylinder	50121, 50126, 50141, 50161, 50171, 50421, 50461, 50471, 50521, 50561, 50571	12	12	100810 00 0	0.295	1	1	1	OP116	00	0	12
		11631, 11731, 11931	12	12	100810 00 0	0.295	1	1	1	OP120	00	0	12
	• Cylinder set	11670	12	12	100810 00 0	0.295	1	1	1	OP156	00	0	12
	• Cylinder set with tubular external cylinder	11721, 11921	50.0	12	100810 00 0	0.295	1	1	1	OP149	00	0	12

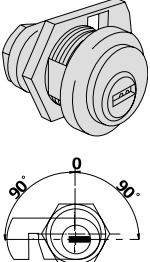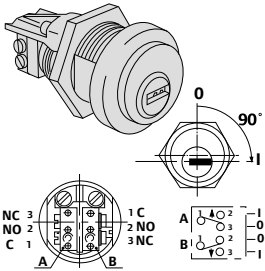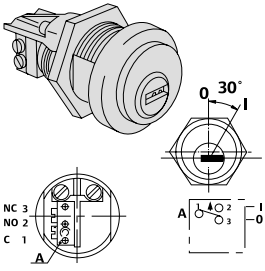Type	Description	Door thickness Plms	Key item	Kg Unit W	Pieces	ITEM					
						Type	Dim.	Hand	Fin.	Per. Spec.	
	<ul style="list-style-type: none"> Plug for steel padlocks 2 keys Pickled brass body Complete with coupling plate item 1.07573.08.0 	12	100810 00 0	0.117	1	1	OP610	00	0	00	
	<ul style="list-style-type: none"> Cylinder for outside access device item 1.07078.28.0 	12	100810 00 0	0.117	1	1	OP610	10	0	12	
	<ul style="list-style-type: none"> Cylinder for outside access device item 1.07078.29.0 	12	100810 00 0	0.117	1	1	OP610	11	0	12	
	<ul style="list-style-type: none"> Cylinder for push-to-open Meroni locks 	12	100810 00 0	0.117	1	1	OP610	12	0	12	
	<ul style="list-style-type: none"> Key extraction pin position (0) Ring item 1.06021.10.0 Deadbolt item 1.06414.20.0 or 1.06414.30.0 to order separately 	17	12	100810 00 0	0.117	1	1	OP410	00	0	12
	<ul style="list-style-type: none"> Microswitch (7 A, 250 V) with welding terminals Automatic return to key extraction position (0) Ring item 1.06021.10.0 	17	12	100810 00 0	0.117	1	1	OP415	01	0	12
	<ul style="list-style-type: none"> Microswitch (7 A, 250 V) with welding terminals Automatic return to key extraction position (0) Ring item 1.06021.10.0 	17	12	100810 00 0	0.117	1	1	OP415	03	0	12


Drawings and dimensions




OP351




OP314

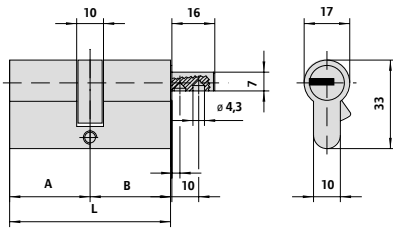


OP352

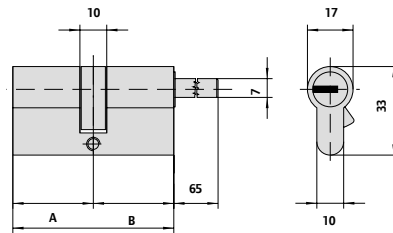


OP357

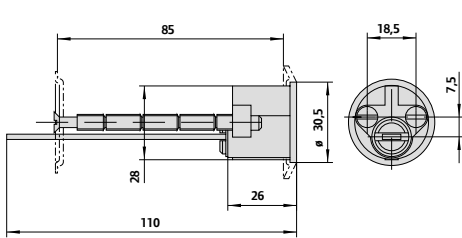


OP510

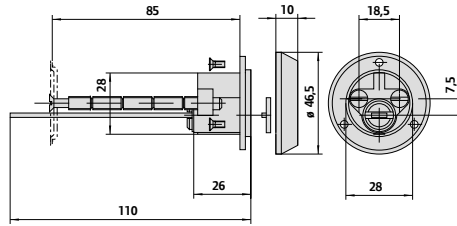


1.OP510.10.0

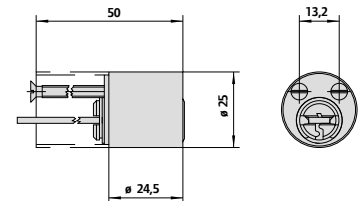


OP210



OP610

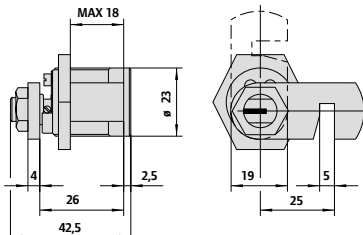

OP410

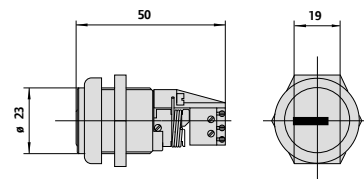

OP415



ONE KEY FOR MULTIPLE ACCESSSES



ALLEGION™



CISA®

CISA Safe Home



Locks for shutters
and security grates




CYLINDER LOCKS FOR SHUTTERS

for metal frames


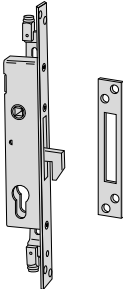


TYPE	DESCRIPTION	Throws	Centre distance	Faceplate	Backset	ITEM					
						UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> Nickel-plated hook bolt, 7.5 mm Inside steel escutcheon item 1.06092.00.0 Zinc-plated steel striking plate item 1.06232.21.0 Pre-arranged for additional locking points with threaded bushings item M8 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Extended bolts item 1.07088.03.0 Cross-key cylinder item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1	85	25	25	0.650	12	1 46865	25	0		
	1	85	25	30	0.670	12	1 46865	30	0		
	1	85	25	35	0.690	12	1 46865	35	0		
 <ul style="list-style-type: none"> Top and bottom locking Inside steel escutcheon item 1.06092.00.0 Pre-arranged for additional locking points with threaded bushings M8 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Extended bolts item 1.07088.03.0 Cross-key cylinder item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 		85	25	25	0.570	12	1 46875	25	0		
		85	25	30	0.590	12	1 46875	30	0		
		85	25	35	0.620	12	1 46875	35	0		


Dimensional drawings

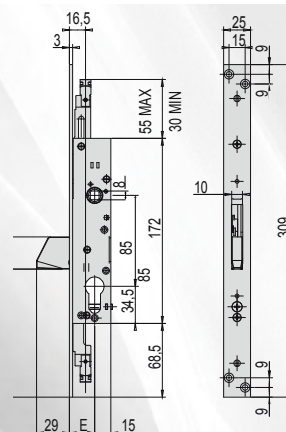

46800, 46802, 46820, 46822 (M8)
46803, 46823 (aggancio rapido)
 E = 25 - 30 - 35

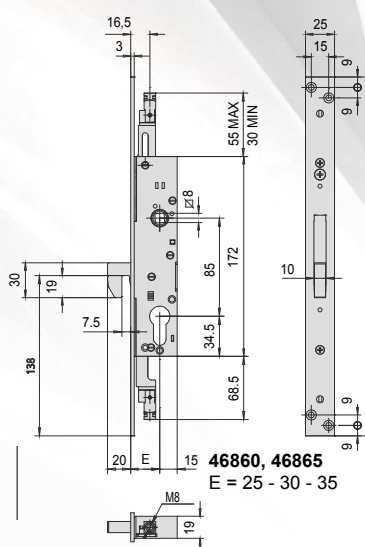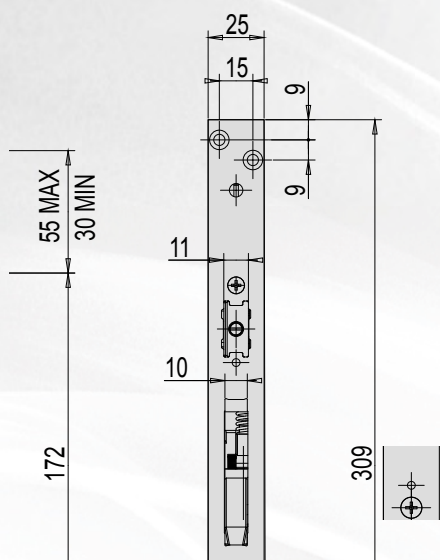

46860, 46865
 E = 25 - 30 - 35

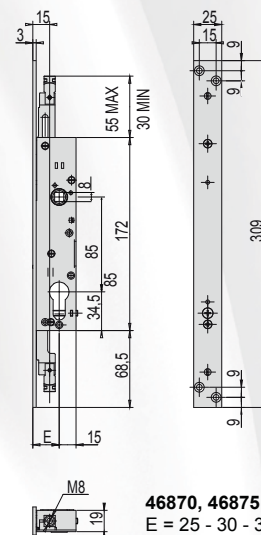


46870, 46875
 E = 25 - 30 - 35

CYLINDER LOCKS FOR SECURITY GRATES

for metal frames





Technical features:
25 mm driving gears stroke
Zinc-plated steel case
STAINLESS steel faceplate
Chamfered dead-bolt to facilitate bolt engagement

Supplied as standard:

- Cylinder fixing screw
- Instruction sheet


On request:



- Cylinder protective rose item 1.06460.00.0

Hand:
0 = non-handed

Certification

- This lock series is certified according to the European Standard EN 12209:03 grade 3 Security (500 Kg lateral force resistance, 400 Kg resistance to blows from below)
- Suitable for doors certified to EN 1627:2011 up to resistance class WK/RC 2

Cylinder to be ordered separately 

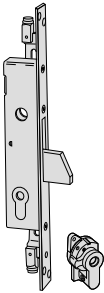TYPE	DESCRIPTION	Throws	Centre distance	Faceplate	Backset	ITEM		Type	Dim.	Hand	Fin.		
						UNIT WEIGHT	NO. PIECES						
 <ul style="list-style-type: none"> ▪ Nickel-plated dead-bolt ▪ Inside steel escutcheon item 1.06092.00.0 ▪ Pre-arranged for additional locking points with threaded bushings M8 <p>ON REQUEST:</p> <ul style="list-style-type: none"> ▪ Extended bolts item 1.07088.03.0 ▪ Cross-key cylinder item 1.02400.10.0 ▪ Floor striker item. 1.06086.00.0 ▪ Floor striker with dust cover item 1.06086.02.0 ▪ Striking plate item 1.06232.21.0 		1		25	25	0,618	12	1	46820	25	0		
		1		25	30	0,673	12	1	46820	30	0		
		1		25	35	0,687	12	1	46820	35	0		
			1		25	25	0,550	12	1	46823	25	0	
			1		25	30	0,570	12	1	46823	30	0	
			1		25	35	0,590	12	1	46823	35	0	
		<p>ON REQUEST:</p> <ul style="list-style-type: none"> ▪ Quick-lock extended bolts item 1.07088.04.0.00.CG (without tips) ▪ Cross-key cylinder item 1.02400.10.0 ▪ Floor striker item 1.06086.00.0 ▪ Floor striker with dust cover item 1.06086.02.0 ▪ Striking plate item 1.06232.21.0 											
	 <ul style="list-style-type: none"> ▪ Nickel-plated dead-bolt ▪ Cross-key cylinder with 3 keys ▪ Pre-arranged for additional locking points with threaded bushings M8 ▪ Pair of nylon roses item 1.06002.00.0 <p>ON REQUEST:</p> <ul style="list-style-type: none"> ▪ Extended bolts item 1.07088.03.0 ▪ Floor striker item 1.06086.00.0 ▪ Floor striker with dust cover item 1.06086.02.0 ▪ Striking plate item 1.06232.21.0 		1	85	25	25	0,670	12	1	46822	25	0	
			1	85	25	30	0,690	12	1	46822	30	0	
		1	85	25	35	0,710	12	1	46822	35	0		

INCREASE YOUR SECURITY






CISA recommends using cylinders that provide high resistance to tearing, bumping and drilling in addition to key duplication protection (keys can only be duplicated by CISA or CISA authorized centres).



CYLINDER LOCKS FOR SECURITY GRATES

for metal frames

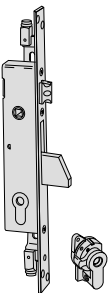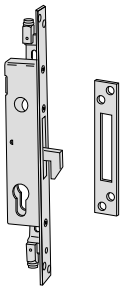

TYPE	DESCRIPTION	Throws	Centre distance	Faceplate	Backset	kg	NO. PIECES	ITEM			
						UNIT WEIGHT		Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> Nickel-plated dead-bolt and latch, 11 to 17 mm adjustable reversible latch Pair of steel roses item 1.06092.00.0 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Striking plate item 1.06232.20.0 Cross-key cylinder item 1.02400.10.0 	1	85	25	25	0,630	12	1 46815	25	0		
	1	85	25	30	0,650	12	1 46815	30	0		
	1	85	25	35	0,670	12	1 46815	35	0		
 <ul style="list-style-type: none"> Nickel-plated dead-bolt and latch, 11 to 17 mm adjustable reversible latch Pair of steel roses item 1.06092.00.0 Pre-arranged for additional locking points with threaded bushings M8 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Extended bolts item 1.07088.03.0 Cross-key cylinder item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striking plate item 1.06232.20.0 	1	85	25	25	0,650	12	1 46825	25	0		
	1	85	25	30	0,670	12	1 46825	30	0		
	1	85	25	35	0,690	12	1 46825	35	0		
 <ul style="list-style-type: none"> Nickel-plated dead-bolt and latch, 11 to 17 mm adjustable reversible latch Cross-key cylinder with 3 keys Pair of nylon roses item 1.06002.00.0 Pre-arranged for additional locking points with threaded bushings M8 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striking plate item 1.06232.20.0 	1	85	25	25	0,770	12	1 46827	25	0		
	1	85	25	30	0,790	12	1 46827	30	0		
	1	85	25	35	0,810	12	1 46827	35	0		
 <ul style="list-style-type: none"> Nickel-plated laminated steel hook bolt, 7,5 mm Inside steel escutcheon item 1.06092.00.0 Pre-arranged for additional locking points with threaded bushings M8 Striking plate item 1.06232.21.0 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Extended bolts item 1.07088.03.0 Cross-key cylinder item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02. 	1	85	25	25	0,610	12	1 46860	25	0		
	1	85	25	30	0,630	12	1 46860	30	0		
	1	85	25	35	0,650	12	1 46860	35	0		
 <ul style="list-style-type: none"> Top and bottom locking Inside steel escutcheon item 1.06092.00.0 Pre-arranged for additional locking points with threaded bushings M8 <p>ON REQUEST:</p> <ul style="list-style-type: none"> Extended bolts item 1.07088.03.0 Cross-key cylinder item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1	85	25	25	0,530	12	1 46870	25	0		
	1	85	25	30	0,550	12	1 46870	30	0		
	1	85	25	35	0,570	12	1 46870	35	0		



Multitop MAX

4 times more secure.



Education




Residential



Commercial



Healthcare



Hospitality

Multitop MAX


Multipoint lock with 4 hook deadbolts for unbeatable security.

HIGH SECURITY

- Locking system with 4 hooks which are independent of the central lock mechanism and each other. If the central deadbolt or one of the hooks is forced, the other hooks remain securely engaged. CISA patented system.

CORRECTS HEAT DISTORTION OF THE DOOR

The rack mechanism, which makes it easier to turn the key, and the hooks with their more rounded design, effectively correct distortion of the door due to sudden changes in temperature.

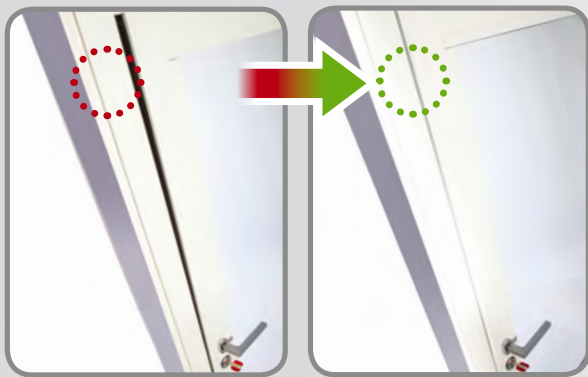

APPLICATIONS

- Entrance doors
- Secondary entrance doors
- Railings and shutters on French windows
- Sliding doors

BENEFITS



For end users

- High resistance to forced entry (2,000 kg for lateral thrust and 1,000 kg for forced entry by widening the profile).
- Energy savings and better noise insulation.



For locksmiths

- Cuts maintenance times and costs.
- Can be installed on different types of doors, including railings.



For designers and architects

- Certified According to European Standard prEN15685 and is suitable for EN1627 certified doors up to resistance class WK/RC4.
- Operates with a Euro profile cylinder and can be integrated into master key systems to manage access.



MULTITOP MAX




INTERCHANGEABILITY

- Multitop MAX is completely interchangeable with all Multitop locks.
- The strikes for the central lock and the divertors with hooks are the same as for Multitop PRO.

Benefits:

- No additional work is needed on the door to install the lock.
- Uses the same current range of strikes. When installing, the position on the profile has to be adjusted only.





ELECTRIC VERSION

Multitop MAX is also available in the electric version with a 15.5 mm thick case and a dead-locking device on the latchbolt.

Benefits:

- Fewer holes are needed on the profile and the lock is correctly installed on thermal cut and European groove profiles
- Increases security for doors which are locked with the latchbolt only.



SECURITY

- Locking system with four 10 mm thick hooks, protected by a hardened steel plate that is 4 mm thick. CISA patent registered.

Benefit:

- High resistance to forced entry (2,000 kg for lateral thrust and 1,000 kg for forced entry by widening the profile).

CERTIFICATIONS

- Grade 6 Security according to European Standard pr EN15685
- Grade 7 Security according to European Standard pr EN 15685 using protective plates for the lock and divertors series 06436
- Suitable for EN 1627 certified doors up to resistance class WK/RC4



VERSATILE LATCHBOLT


Multitop MAX is supplied standard in the latchbolt version. The following functions are also possible:

- Change from latchbolt to roller directly from the lock faceplate (CISA patent registered).
- Insert the latchbolt backwards for the deadbolt only version.

Benefits:

- Reduced stock.
- More flexible adjustments.
- The roller can be replaced even when the lock is installed.
- No need for additional accessories for the deadbolt only function.

TYPE	DESCRIPTION	No. LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	No. PIECES	ITEM		
									TYPE	DIM.	HAND



CENTRE DISTANCE 85 MM

- Stainless steel 'U'-shaped adjustable faceplate. 24 x 5 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt.
- 4 hooks with hardened steel inserts.
- CE 12V AC voltage
- Absorbed current 3.1 A

3	2	85	24	25	3.520	1	1	19656	25	0
3	2	85	24	30	3.580	1	1	19656	30	0
3	2	85	24	35	3.640	1	1	19656	35	0
3	2	85	24	40	3.700	1	1	19656	40	0

MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

CENTRE DISTANCE 85 MM

- Stainless steel 'U'-shaped adjustable faceplate. 24 x 5 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened steel inserts.

3	2	85	24	25	3.310	1	1	49656	25	0
3	2	85	24	30	3.370	1	1	49656	30	0
3	2	85	24	35	3.430	1	1	49656	35	0
3	2	85	24	40	3.490	1	1	49656	40	0

CENTRE DISTANCE 92 MM

- Stainless steel 'U'-shaped adjustable faceplate. 24 x 5 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened steel inserts.

3	2	92	24	25	3.310	1	1	49658	25	0
3	2	92	24	30	3.370	1	1	49658	30	0
3	2	92	24	35	3.430	1	1	49658	35	0
3	2	92	24	40	3.490	1	1	49658	40	0

MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0


"MODULAR" ROLLER ASSEMBLY:
item 1.06000.00.0 (roller inserts supplied as standard)

TYPE	DESCRIPTION	No. LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	No. PIECES	ITEM		
									TYPE	DIM.	HAND



CENTRE DISTANCE 85 MM											
<ul style="list-style-type: none"> Stainless steel "flat" adjustable faceplate 24 x 3 mm. height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt. 4 hooks with hardened steel inserts. CE 12V AC voltage Absorbed current 3.1 A 	3	2	85	24	25	3.520	1	1	19746	25	0
	3	2	85	24	30	3.580	1	1	19746	30	0
	3	2	85	24	35	3.640	1	1	19746	35	0
	3	2	85	24	40	3.700	1	1	19746	40	0

MATCHING ADJUSTABLE METAL STRIKES	
Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

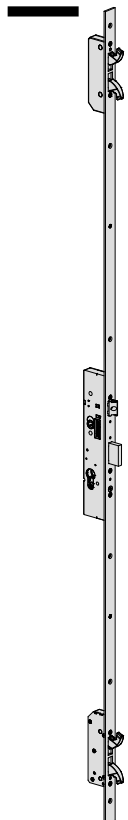

CENTRE DISTANCE 85 MM											
<ul style="list-style-type: none"> Stainless steel "flat" adjustable faceplate 24 x 3 mm height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. 11 to 17 mm adjustable latchbolt. 4 hooks with hardened steel inserts. 	3	2	85	24	25	3.310	1	1	49746	25	0
	3	2	85	24	30	3.370	1	1	49746	30	0
	3	2	85	24	35	3.430	1	1	49746	35	0
	3	2	85	24	40	3.490	1	1	49746	40	0

CENTRE DISTANCE 92 MM											
<ul style="list-style-type: none"> Stainless steel "flat" adjustable faceplate 24 x 3 mm height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. 11 to 17 mm adjustable latchbolt. 4 hooks with hardened steel inserts. 	3	2	92	24	25	3.310	1	1	49748	25	0
	3	2	92	24	30	3.370	1	1	49748	30	0
	3	2	92	24	35	3.430	1	1	49748	35	0
	3	2	92	24	40	3.490	1	1	49748	40	0

MATCHING ADJUSTABLE METAL STRIKES	
Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0


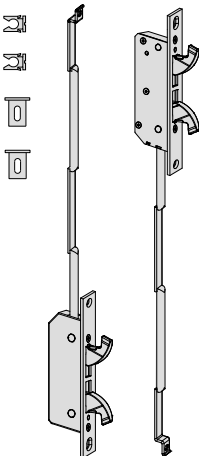
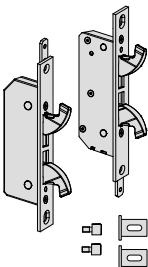
"MODULAR" ROLLER ASSEMBLY :
item 1.06000.00.0 (roller inserts supplied as standard)





TYPE	DESCRIPTION	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT	No. PIECES	ITEM			
								TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Stainless steel faceplate 22 x 3 mm Deadbolt and latchbolt 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt Pair of nylon faceplate spacers item 1.06141.65.0 Threaded pins for extended bolts CE 12V AC voltage Absorbed current 3.1 A ON REQUEST <ul style="list-style-type: none"> Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 Pair of external bolt connectors item 1.06442.00.0 Lateral locking points item 1.06443.41.0 Lateral locking points item 1.06443.46.0 	2	85	22	25	1.010	1	1	19225	25	0
		2	85	22	30	1.070	1	1	19225	30	0
		2	85	22	35	1.130	1	1	19225	35	0
		2	85	22	40	1.190	1	1	19225	40	0
	<ul style="list-style-type: none"> Stainless steel faceplate 22 x 3 mm Deadbolt and latchbolt 11 to 17 mm adjustable latchbolt Pair of nylon faceplate spacers item 1.06141.65.0 Threaded pins for extended bolts ON REQUEST <ul style="list-style-type: none"> Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 Pair of external bolt connectors item 1.06442.00.0 Lateral locking points item 1.06443.41.0 Lateral locking points item 1.06443.46.0 	2	85	22	25	0.720	12	1	49225	25	0
		2	85	22	30	0.780	12	1	49225	30	0
		2	85	22	35	0.840	12	1	49225	35	0
		2	85	22	40	0.900	12	1	49225	40	0
		2	92	22	25	0.720	12	1	49228	25	0
		2	92	22	30	0.780	12	1	49228	30	0
		2	92	22	35	0.840	12	1	49228	35	0
		2	92	22	40	0.900	12	1	49228	40	0
	<ul style="list-style-type: none"> Stainless steel faceplate 22 x 3 mm Deadbolt and roller 2.5 to 16.5 mm adjustable roller Pair of nylon faceplate spacers item 1.06141.65.0 Threaded pins for extended bolts ON REQUEST <ul style="list-style-type: none"> Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 Pair of external bolt connectors item 1.06442.00.0 Lateral locking points item 1.06443.41.0 Lateral locking points item 1.06443.46.0 Inserts for strikes for locks series 49250: <ul style="list-style-type: none"> item 1.06141.70.0 for item 1.06463.16/17/34/35.0 item 1.06141.71.0 for item 1.06463.05/31/32/33.0 item 1.06141.86.0 for item 1.06461.30/35.0 	2	-	22	25	0.720	12	1	49250	25	0
		2	-	22	30	0.780	12	1	49250	30	0
		2	-	22	35	0.840	12	1	49250	35	0
		2	-	22	40	0.900	12	1	49250	40	0
		2	-	22	25	0.720	12	1	49250	25	0



MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

“MODULAR” ROLLER ASSEMBLY FOR 49225 SERIES:
item 1.06000.00.0 (roller inserts supplied as standard)

TYPE	DESCRIPTION	FOR SERIES / ITEM	kg		ITEM			
			UNIT WEIGHT	No. PIECES	TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> “Modular” roller assembly for locks 49000 series - SUPPLIED AS STANDARD nylon insert 1.06141.70.0 nylon insert 1.06141.71.0 nylon insert 1.06141.86.0 		0.060	12	1	06000	00	0
	<ul style="list-style-type: none"> Pair of lateral locking points operated by internal rods 4 hooks with hardened steel inserts. Stainless steel faceplate 22 x 3 mm Closed case SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Pair of rods diameter 8 mm. - Pair of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2pcs) ON REQUEST: <ul style="list-style-type: none"> - Special strikes (see Vademecum) 	19225 49225 49250 49228 16200 46200 56000 57000 17000	1.000	1	1	06443	41	0
	<ul style="list-style-type: none"> pair of lateral locking points operated by external bolts 4 hooks with hardened steel inserts. Stainless steel faceplate 22 x 3 mm Closed case SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Pair of external bolt controls - Pair of faceplate spacers item 1.06141.65.0 - Pair of threaded pins ON REQUEST: <ul style="list-style-type: none"> - Special strikes (see Vademecum) 	19225 49225 49250 49228 16200 46200 56000 57000 17000	0.766	1	1	06443	46	0

TYPE	DESCRIPTION	kg	No. PIECES	ITEM			
				TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Lock protective plate to increase drill resistance (grade 7 prEN 15685:10) 	0.100	6	1	06436	10	0
	<ul style="list-style-type: none"> Protective plate for lateral locking points to increase drill resistance (grade 7 prEN 15685:10) 	0.057	6	1	06436	11	0
	<ul style="list-style-type: none"> Microswitch for hook status to be used with lateral locking points 19000 and 49000 series 	0.020	1	1	06195	08	0
	<ul style="list-style-type: none"> Protective rose for cylinders RS3, ASTRAL, AP3 (with long key CL car.), AP4 and ASIX, in chrome-plate carbonitrided steel for 19000 and 49000 series, complete with: <ul style="list-style-type: none"> - Spacers 2 mm. (19pcs), 1 mm. (2pcs) - M5 x 75mm screws - Inside escutcheon AVAILABLE FINISHES <ul style="list-style-type: none"> - Gold polished steel (fin. 15) ON REQUEST <ul style="list-style-type: none"> - Set of additional spacers for profiles 65 to 87 mm wide item 1.06141.87.0 	0.485	1	1	06460	05	0

TYPE	DESCRIPTION	FOR SERIES / ITEM	kg	No. PIECES	ITEM			
					TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height 7.5 to 10 mm) 	106463 24 0; 106463 25 0 106463 34 0; 106463 35 0	0.019	25	1	06141	79	0
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height 3 to 7.5 mm) 	106463 24 0; 106463 25 0 106463 34 0; 106463 35 0	0.019	25	1	06141	89	0

TECHNICAL FEATURES

- Case thickness 15.5 mm
- Closed case
- Backsets 25-30-35-40 mm
- Latchbolt interchangeable with roller
- Centre distance 85 and 92 mm
- Case in pressure die-cast metal
- Steel cover
- Top and bottom adjustable faceplate
- 11 to 17 mm adjustable latchbolt
- 2.5 to 15.5 mm adjustable roller
- 10.5 to 16.5 mm adjustable latchbolt and deadbolt (electric versions)
- Latchbolt with anti-burglary device (electric versions)
- 10 mm thick hooks with 25 mm protrusion
- Protective plate for grade 7 item 1.06436.10/11.0
- Microswitch can be installed on the divertor case
- 8 mm square spindle
- DIN holes to fix handle plate
- CE 12V AC voltage (electric versions)

OPERATION

- The key operates the latchbolt, central deadbolt and hooks. The remote electric control (electric locks only) and handle operate the latchbolt
- The lock is fitted with a misalignment device

FINISHES

- Zinc-plated cases and covers
- Stainless steel faceplate
- Nickel-plated latchbolt, roller, deadbolt and hooks

HAND

0 = non-handed

SUPPLIED AS STANDARD

- Pair of nylon protective roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

ON REQUEST

- Modular roller assembly item 1.06000.00.0
- Euro profile cylinder
- Adjustable metal strikes (see special vademecum)
- Cylinder protective rose item 1.06460.05.0
- Button item 1.06110.15.0 (elettroserratura)
- Pair of electric contacts item 1.06511.00.0

SPECIFICATIONS

MULTITOP MAX MECHANICAL LOCK SERIES (4965X-XX-0 and 4974X-XX-0).

Lock classified 3X9A0G6063 or 3X9A0G7073 in accordance with European Standard prEN 15685. Lock and multipoint gear electric lock (re. CISA type "Multitop Max") with resistance to lateral thrust for 2,000 kg, pulling resistance 1,000 kg and lifting resistance 600 kg.

Grade 6 Security (Grade 7 Security by protecting the lock and locking points with hardened steel plates). Grades 6 or 7 mean the lock is suitable for EN 1627:2011 certified doors up to resistance class WK/RC 4.



Lock suitable for doors for public use. Locking system with four 10 mm thick hooks, protected by a hardened steel plate that is 4 mm thick (CISA patent registered). The 4 hooks are independent of each other and of the central lock mechanism: if the central deadbolt or one of the hooks is forced, the other locking points remain securely engaged. This locking system increases resistance to lateral thrust and forced entry by widening the profile. Deadlocking latchbolt (electric version).

Gear mechanism to correct heat distortion of the door: door hermetically sealed, energy savings and better noise insulation.



Compulsory parts: CISA- type cylinder and strike. Optional: microswitch to signal door status (open or locked) which is always controlled by electric contact.

Cylinder protective rose for greater security against forced entry.


Electric strike plate for remote opening.

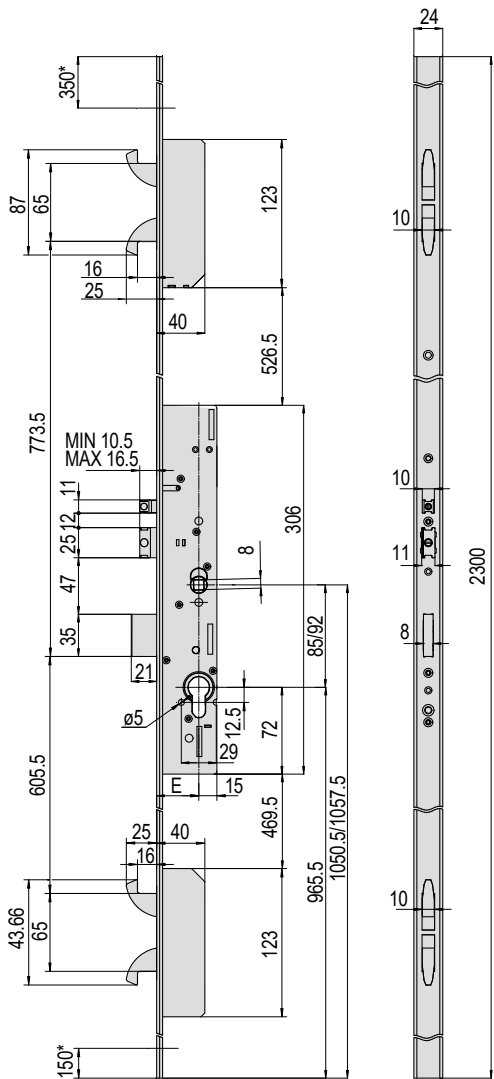


19746
19656

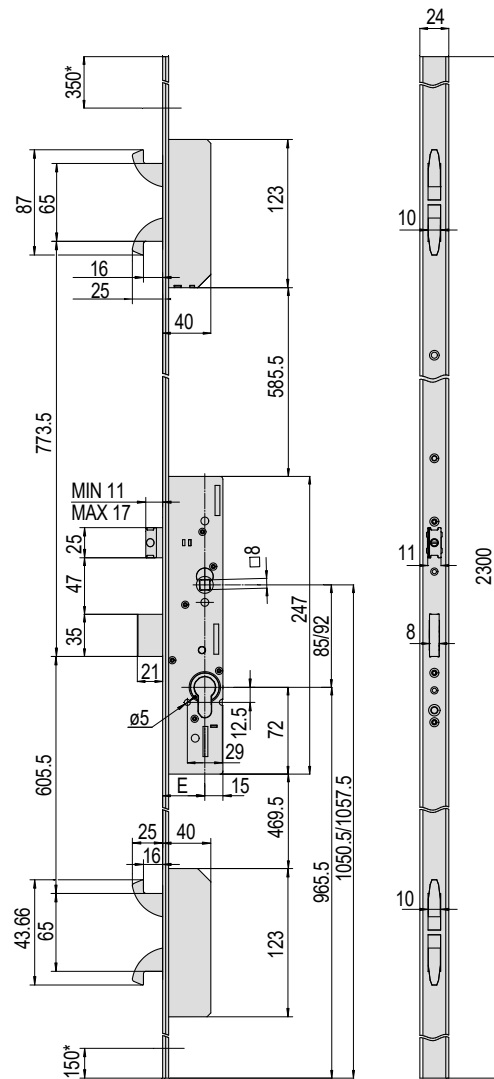


49746 - 49748
49656 - 49658




* ADJUSTMENT
E = 25 - 30 - 35 - 40




* ADJUSTMENT
E = 25 - 30 - 35 - 40

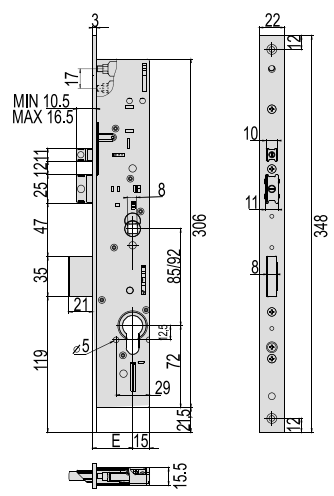

19225
E = 25-30-35-40

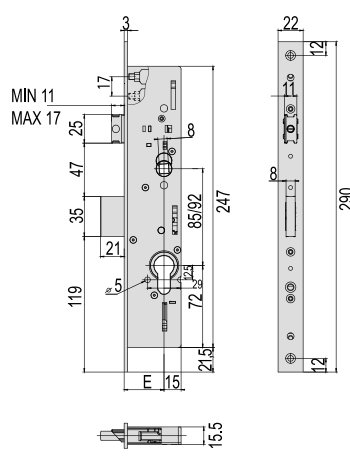

49225 - 49228
E = 25-30-35-40

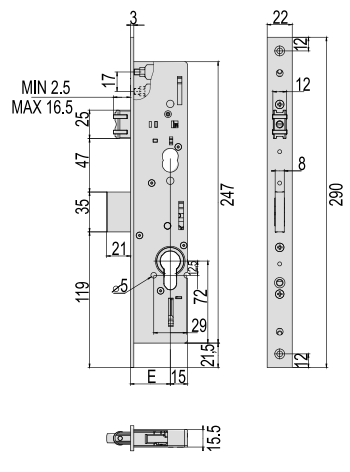

49250
E = 25-30-35-40



3 Latchbolts

Multipoint gear lock.



Education




Residential



Commercial




Healthcare




Hospitality

TYPE	DESCRIPTION	NO. LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	No. PIECES	ITEM		
									TYPE	DIM.	HAND

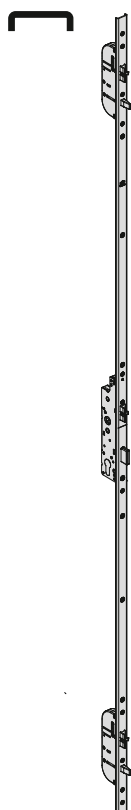

CENTRE DISTANCE 92 MM												
<ul style="list-style-type: none"> Zinc-plated steel 'U'-shaped adjustable faceplate 24 x 6 mm, height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. 		3	2	92	24	35	3.800	1	1	48816	35	0
<ul style="list-style-type: none"> 3 lateral latchbolts. 3 latchbolts, 11 mm thick. 		3	2	92	24	40	3.820	1	1	48816	40	0

MATCHING ADJUSTABLE METAL STRIKES	
Central profile (1pc)+Divertors (2pcs) item	Profile
1.06461.03.1/2	steel type
1.06461.04.1/2	door type
1.06461.27.1/2	R type (overlapping)
1.06461.23.0	European groove

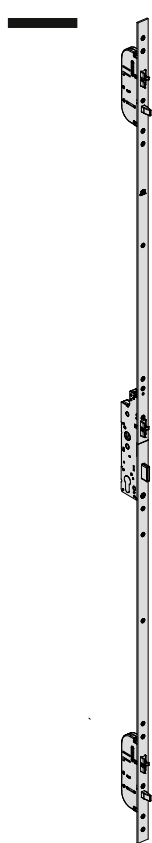

CENTRE DISTANCE 92 MM												
<ul style="list-style-type: none"> Zinc-plated steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. 		3	2	92	24	35	3.800	1	1	48916	35	0
<ul style="list-style-type: none"> 3 lateral deadbolts. 3 latchbolts, 11 mm thick. 		3	2	92	24	40	3.820	1	1	48916	40	0

MATCHING ADJUSTABLE METAL STRIKES	
central profile (1pc)+Divertors (2pcs) item.	Profile
1.06461.03.1/2	steel type
1.06461.04.1/2	door type
1.06461.27.1/2	R type (overlapping)
1.06461.23.0	European groove

TYPE	DESCRIPTION	UNIT WEIGHT	NO. PIECES	ITEM			
				TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Zinc-plated steel flat strike kit 24x3 mm RH for "steel" profile SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	03	1
	<ul style="list-style-type: none"> Zinc-plated steel flat strike kit 24x3 mm LH for "steel" profile SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	03	2
	<ul style="list-style-type: none"> Zinc-plated steel "U"-shaped strike kit 24x6 mm RH for "door" profile SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	04	1
	<ul style="list-style-type: none"> Zinc-plated steel "U"-shaped strike kit 24x6 mm LH for "door" profile SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	04	2
	<ul style="list-style-type: none"> Zinc-plated steel strike kit RH for "R type" profile (overlapping) SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	27	1
	<ul style="list-style-type: none"> Zinc-plated steel strike kit LH for "R type" profile (overlapping) SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	27	2
	<ul style="list-style-type: none"> Reversible stainless steel strike kit for "European groove" profile SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Strike for central lock 1 pc - Strike for divertors 2 pcs 	0.310	6	1	06461	23	0

TYPE	DESCRIPTION	FOR SERIES / ITEM	UNIT WEIGHT	NO. PIECES	ITEM			
					TYPE	DIM.	HAND	FIN.
	<ul style="list-style-type: none"> Nylon cover for outward opening of thermal cut aluminium profiles (lip height 7.5 - 10 mm) 	106463 24 0; 106463 25 0 106463 34 0; 106463 35 0 106465 24 0; 106465 25 0 106465 34 0; 106465 35 0	0.019	25	1	06141	79	0
	<ul style="list-style-type: none"> Nylon cover for outward opening of thermal cut aluminium profiles (lip height 3 - 7.5 mm) 	106463 24 0; 106463 25 0 106463 34 0; 106463 35 0 106465 24 0; 106465 25 0 106465 34 0; 106465 35 0	0.019	25	1	06141	89	0

3 LATCHBOLTS



TECHNICAL FEATURES

- Case thickness 15.5 mm
- Closed case
- Backsets 35-40 mm
- Centre distance 92 mm
- Steel case and cover
- Top and bottom adjustable faceplate 24x3 and 24x6
- Three 11-mm thick latchbolts
- 8 mm-thick deadbolts with 20 mm protrusion
- 8 mm square spindle
- DIN holes to fix handle plate

FINISHES

- Zinc-plated cases and covers.
- Zinc-plated steel faceplate with corrosion resistance up to 480 hours.
- Zinc-plated latchbolt and deadbolts.

HAND

- 0 = non-handed

SUPPLIED AS STANDARD

- Pair of nylon protective roses item 1.06012.01.0
- Cylinder and rose fixing screws.
- Instruction sheet.
- Nylon faceplate cover plugs.

ON REQUEST

- Euro profile cylinder.
- Adjustable metal strikes
(see special vademecum).


SPECIFICATIONS

MULTIPOINT "3 LATCHBOLTS" MECHANICAL LOCK SERIES (488XX-XX-0 and 489XX-XX-0)

Lock classified 3S900G3030 in accordance with European Standard prEN 15685.

Multipoint gear lock (ref. CISA "3 latchbolts" type) with resistance to lateral thrust of 500Kg and front thrust of 400Kg.

Grade 3 Security. Grade 3 means the lock is suitable for EN 1627 certified doors up to resistance class WK/RC 2.

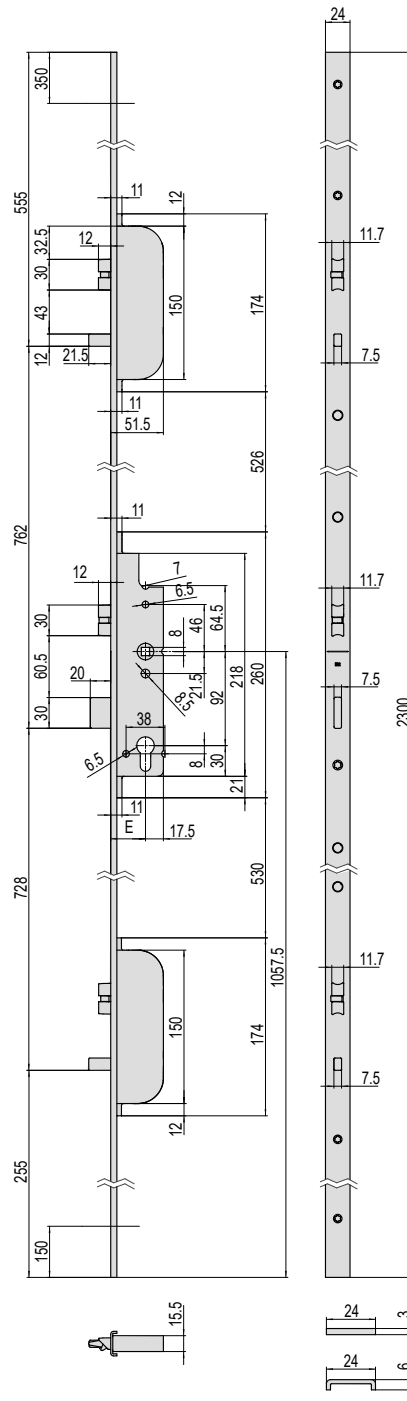

48916

48816

E = 35-40

Lock suitable for doors for public use. Locking system with 3 latchbolts, 11mm thick, locks the door securely without having to use the key. The 3 latchbolt system also keeps the door aligned at all times, correcting heat distortion. The 3 latchbolts are independent of each other: if one is forced, the other locking points remain securely engaged. Zinc-plated steel faceplate with corrosion resistance up to 480 hours. Compulsory parts: CISA- type cylinder and strike.



ALLEGION™



CISA Safe Home

Rim locks for wooden
and steel doors



CYLINDER RIM LOCKS

for wooden and steel doors



Technical features:

- Steel case and striker, painted in metallized antique bronze
- Nickel-plated steel latch
- Nickel-plated steel multiple deadbolts

Supplied as standard:

- Striker
- Outside escutcheon item 1.06043.00.0
- Inside escutcheon item 1.06458.11.0
- Fixing screws
- Instruction sheet

On request:

- Protective rose item 1.06490.02.0
- Spacers item 1.06472.40.0

Hand:

- 1 = R.H.inwards
- 2 = L.H. inwards

Cylinder to be ordered separately




TYPE	DESCRIPTION	Locking points	Throws	Backset	kg		ITEM			
					UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	
	▪ Dead-bolt only, 4 bolts	1	2	64	2,340	1	1	56152	60	1
		1	2	64	2,330	1	1	56152	60	2
	▪ Dead-bolt only, 4 bolts ON REQUEST: ▪ Extended bolts item 1.06425.07.0 ▪ Pair of diverting devices item 1.06418.00.0	3	2	64	2,650	1	1	56162	60	1
		3	2	64	2,650	1	1	56162	60	2
	▪ Dead-bolt only, 4 bolts SUPPLIED AS STANDARD: ▪ Subsidiary driving mechanism ON REQUEST: ▪ Extended bolts item 1.06426.07.0 ▪ Pair of diverting devices item 1.06418.00.0	5	2	64	3,450	1	1	56172	60	1
		5	2	64	3,450	1	1	56172	60	2
	▪ Latch and dead-bolt, 3 bolts ▪ Draw-back pull	1	2	64	2,376	1	1	56157	60	1
		1	2	64	2,379	1	1	56157	60	2
	▪ Latch and dead-bolt, 3 bolts ▪ Draw-back pull ON REQUEST: ▪ Extended bolts item 1.06425.07.0 ▪ Pair of diverting devices item 1.06418.00.0	3	2	64	2,640	1	1	56167	60	1
		3	2	64	2,640	1	1	56167	60	2
	▪ Latch and dead-bolt, 3 bolts ▪ Draw-back pull SUPPLIED AS STANDARD: ▪ Subsidiary driving mechanism ON REQUEST: ▪ Extended bolts item 1.06426.07.0 ▪ Pair of diverting devices item 1.06418.00.0	5	2	64	3,300	1	1	56177	60	1
		5	2	64	3,300	1	1	56177	60	2

DOUBLE-BIT KEY RIM LOCKS

For wooden and steel doors - New configuration





Technical features:

- Steel case and striker, painted in metallized antique bronze
- Nickel-plated steel latch
- Nickel-plated steel multiple deadbolts
- Picking resistant protection device on the latch lever
- External key guide













Supplied as standard:









- Striker
- Outside escutcheon item 1.06140.00.0
- 3 keys:
 - item 1.00125.00.1 for hand 1
 - item 1.00125.00.2 for hand 2
- Fixing screws
- Instruction sheet

Hand:


1 = R.H. inwards

2 = L.H. inwards


TYPE	DESCRIPTION	Key item	Locking points	Throws	Backset	kg		ITEM			
						UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	
	<ul style="list-style-type: none"> Dead-bolt only, 4 bolts 	 1 00125 00 1/2	1	4	64	2,340	1	1	57152	60	1
			1	4	64	2,330	1	1	57152	60	2
	<ul style="list-style-type: none"> Dead-bolt only, 4 bolts ON REQUEST: Extended bolts item 1.06425.07.0 Pair of diverting devices item 1.06418.00.0 	 1 00125 00 1/2	3	4	64	2,650	1	1	57162	60	1
			3	4	64	2,650	1	1	57162	60	2
	<ul style="list-style-type: none"> Dead-bolt only, 4 bolts SUPPLIED AS STANDARD: Subsidiary driving mechanism ON REQUEST: Extended bolts item 1.06426.07.0 Pair of diverting devices item 1.06418.00.0 	 1 00125 00 1/2	5	4	64	3,450	1	1	57172	60	1
			5	4	64	3,450	1	1	57172	60	2
	<ul style="list-style-type: none"> Latch and dead-bolt, 3 bolts Draw-back pull 	 1 00125 00 1/2	1	4	64	2,376	1	1	57157	60	1
			1	4	64	2,379	1	1	57157	60	2
	<ul style="list-style-type: none"> Latch and dead-bolt, 3 bolts Draw-back pull ON REQUEST: Extended bolts item 1.06425.07.0 Pair of diverting devices item 1.06418.00.0 	 1 00125 00 1/2	3	4	64	2,640	1	1	57167	60	1
			3	4	64	2,640	1	1	57167	60	2
	<ul style="list-style-type: none"> Latch and dead-bolt, 3 bolts Draw-back pull SUPPLIED AS STANDARD: Subsidiary driving mechanism ON REQUEST: Extended bolts item 1.06426.07.0 Pair of diverting devices item 1.06418.00.0 	 1 00125 00 1/2	5	4	64	3,300	1	1	57177	60	1
			5	4	64	3,300	1	1	57177	60	2

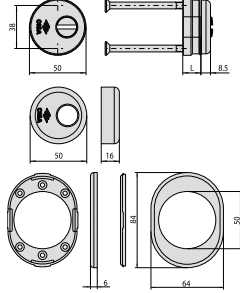TYPE	DESCRIPTION	For series / Item			ITEM			
			UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	
	<ul style="list-style-type: none"> Outside brass escutcheon <p>AVAILABLE FINISHES:</p> <ul style="list-style-type: none"> See the General Catalogue 	56152, 56162, 56172, 56157, 56167, 56177	0,024	100	1	06043	00	0
	<ul style="list-style-type: none"> Inside aluminium escutcheon painted in metallized antique bronze 	56152, 56162, 56172, 56157, 56167, 56177	0,032	12	1	06458	11	0
	<ul style="list-style-type: none"> Bronze lacquered steel top striker 	56152, 56162, 56172, 56157, 56167, 56177, 57152, 57162, 57172, 57157, 57167, 57177	0,442	2	1	07055	00	0
	<ul style="list-style-type: none"> Carbonitrided steel protective rose, polished brass finish <p>SUPPLIED AS STANDARD:</p> <ul style="list-style-type: none"> Rose body Cap Cover plate ring screws M6 x 45 mm <p>AVAILABLE FINISHES:</p> <p>See the General Catalogue</p>	56152, 56162, 56172, 56157, 56167, 56177	0,365	6	1	06490	02	0
	<ul style="list-style-type: none"> Zinc-plated 2 mm spacer for protection roses 	06490-02	0,734	6	1	06472	40	0
	<ul style="list-style-type: none"> Set of bronze lacquered steel diverting devices 	56152, 56162, 56172, 56157, 56167, 56177, 57152, 57162, 57172, 57157, 57167, 57177	0,050	12	1	06418	00	0
	<ul style="list-style-type: none"> Cranked, adjustable extended bolt in bronze lacquered steel 	56152, 56162, 56172, 56157, 56167, 56177, 57152, 57162, 57172, 57157, 57167, 57177	0,770	1	1	06423	00	0
	<ul style="list-style-type: none"> Long, adjustable extended bolt, in bronze lacquered steel 	56152, 56162, 56172, 56157, 56167, 56177, 57152, 57162, 57172, 57157, 57167, 57177	0,766	6	1	06424	00	0

TYPE	DESCRIPTION	For series / Item	ITEM					
			UNIT WEIGHT	NO. PIECES	Type	Dim.	Hand	
	<ul style="list-style-type: none"> Set of extended bolts for locks with 3 locking points SUPPLIED AS STANDARD: Set of extended bolts Top striker item 1.06236.00.0 Floor striker item 1.06237.00.0 2 guide rods item 1.06422.00.0 	56162, 56167, 57162, 57167, 57192	1,500	1	1	06425	07	0
	<ul style="list-style-type: none"> Set of extended bolts for locks with 5 locking points SUPPLIED AS STANDARD: Pair of extended bolts, top and bottom 1 connecting rod 2 top strikers item 1.06236.00.0 2 floor strikers item 1.06237.00.0 4 guide rods item 1.06422.00.0 	56172, 56177, 57172, 57177	3,300	1	1	06426	07	0
	<ul style="list-style-type: none"> Top and bottom locking point for secondary leaf Inside coin-activated piece ON REQUEST: 2 extended bolts item 1.06425.07.0 		0,735	1	1	57192	00	0

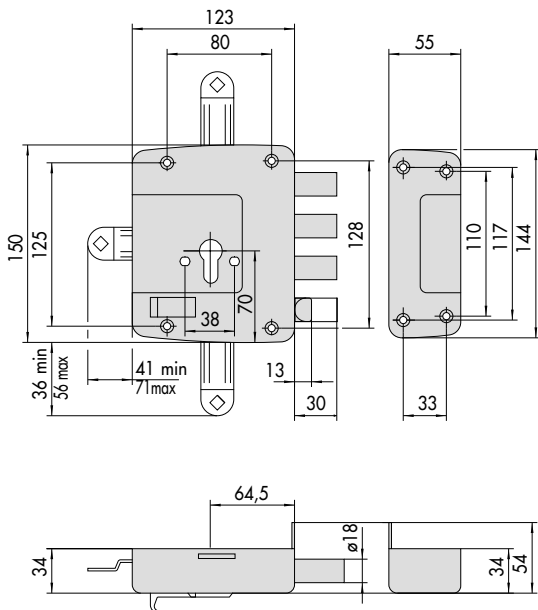

56152, 56162, 56172, 56157, 56167, 56177

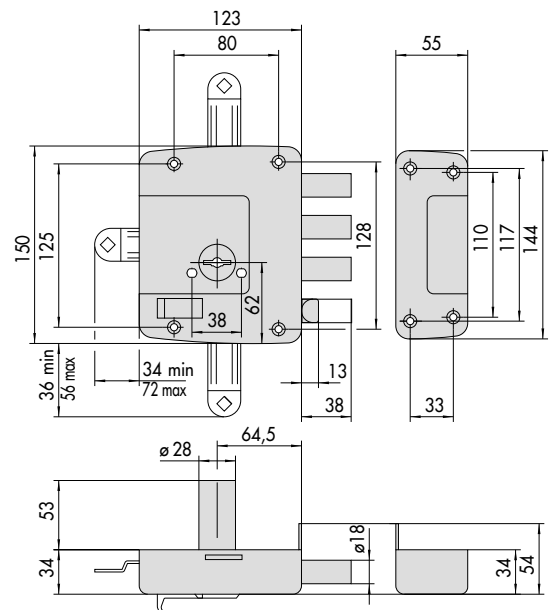

57152, 57162, 57172, 57157, 57167, 57177



MYEVO

Solutions
for armoured doors



MyEVO



SMART AUTOMATIC CLOSING

Shutting the door automatically activates the system and engages all the deadbolts until it is completely locked.



DIFFERENT OPERATING MODES WITHOUT KEYS

With MyEVO you can choose how to control opening .

- With keypad only
- With RFID credentials (transponder) only
- With the keypad and transponder



ACCESS CONTROL

Personalised codes which can be easily activated and deactivated and/or RFID credentials (transponder) allow access to different people.



3 DIFFERENT MODES FOR VERSATILE USE

- AUTOMATIC
Just push the door to and it shuts securely: the deadbolts automatically engage.
- SEMI-AUTOMATIC
When the door is shut, the deadbolts do not engage so you can open it with the handle.
- HOLD OPEN
The door is always open: the latchbolt and deadbolts never engage even when the door is pushed to.



AESTHETICS AND DESIGN

The backlit membrane keypad with its clean lines is available in a wide range of finishes which blend in perfectly with any kind of door.



ACOUSTIC AND LIGHT ALARMS

Acoustic and light alarms on the keypad, RFID reader and button indicate whether the system is working properly.



SILENT OPERATION

The operating mechanism has been designed to keep noise to an absolute minimum.



CERTIFIED LOCK

Security and operation have been tested in accordance with European standards EN 12209:03 and EN 14846:10.




ACCESS WITH TRADITIONAL KEY

The lock can always be opened using a mechanical key.



CISA CERTIFIED CYLINDERS

We recommend combining the lock with a CISA certified cylinder with protected key for greater security.

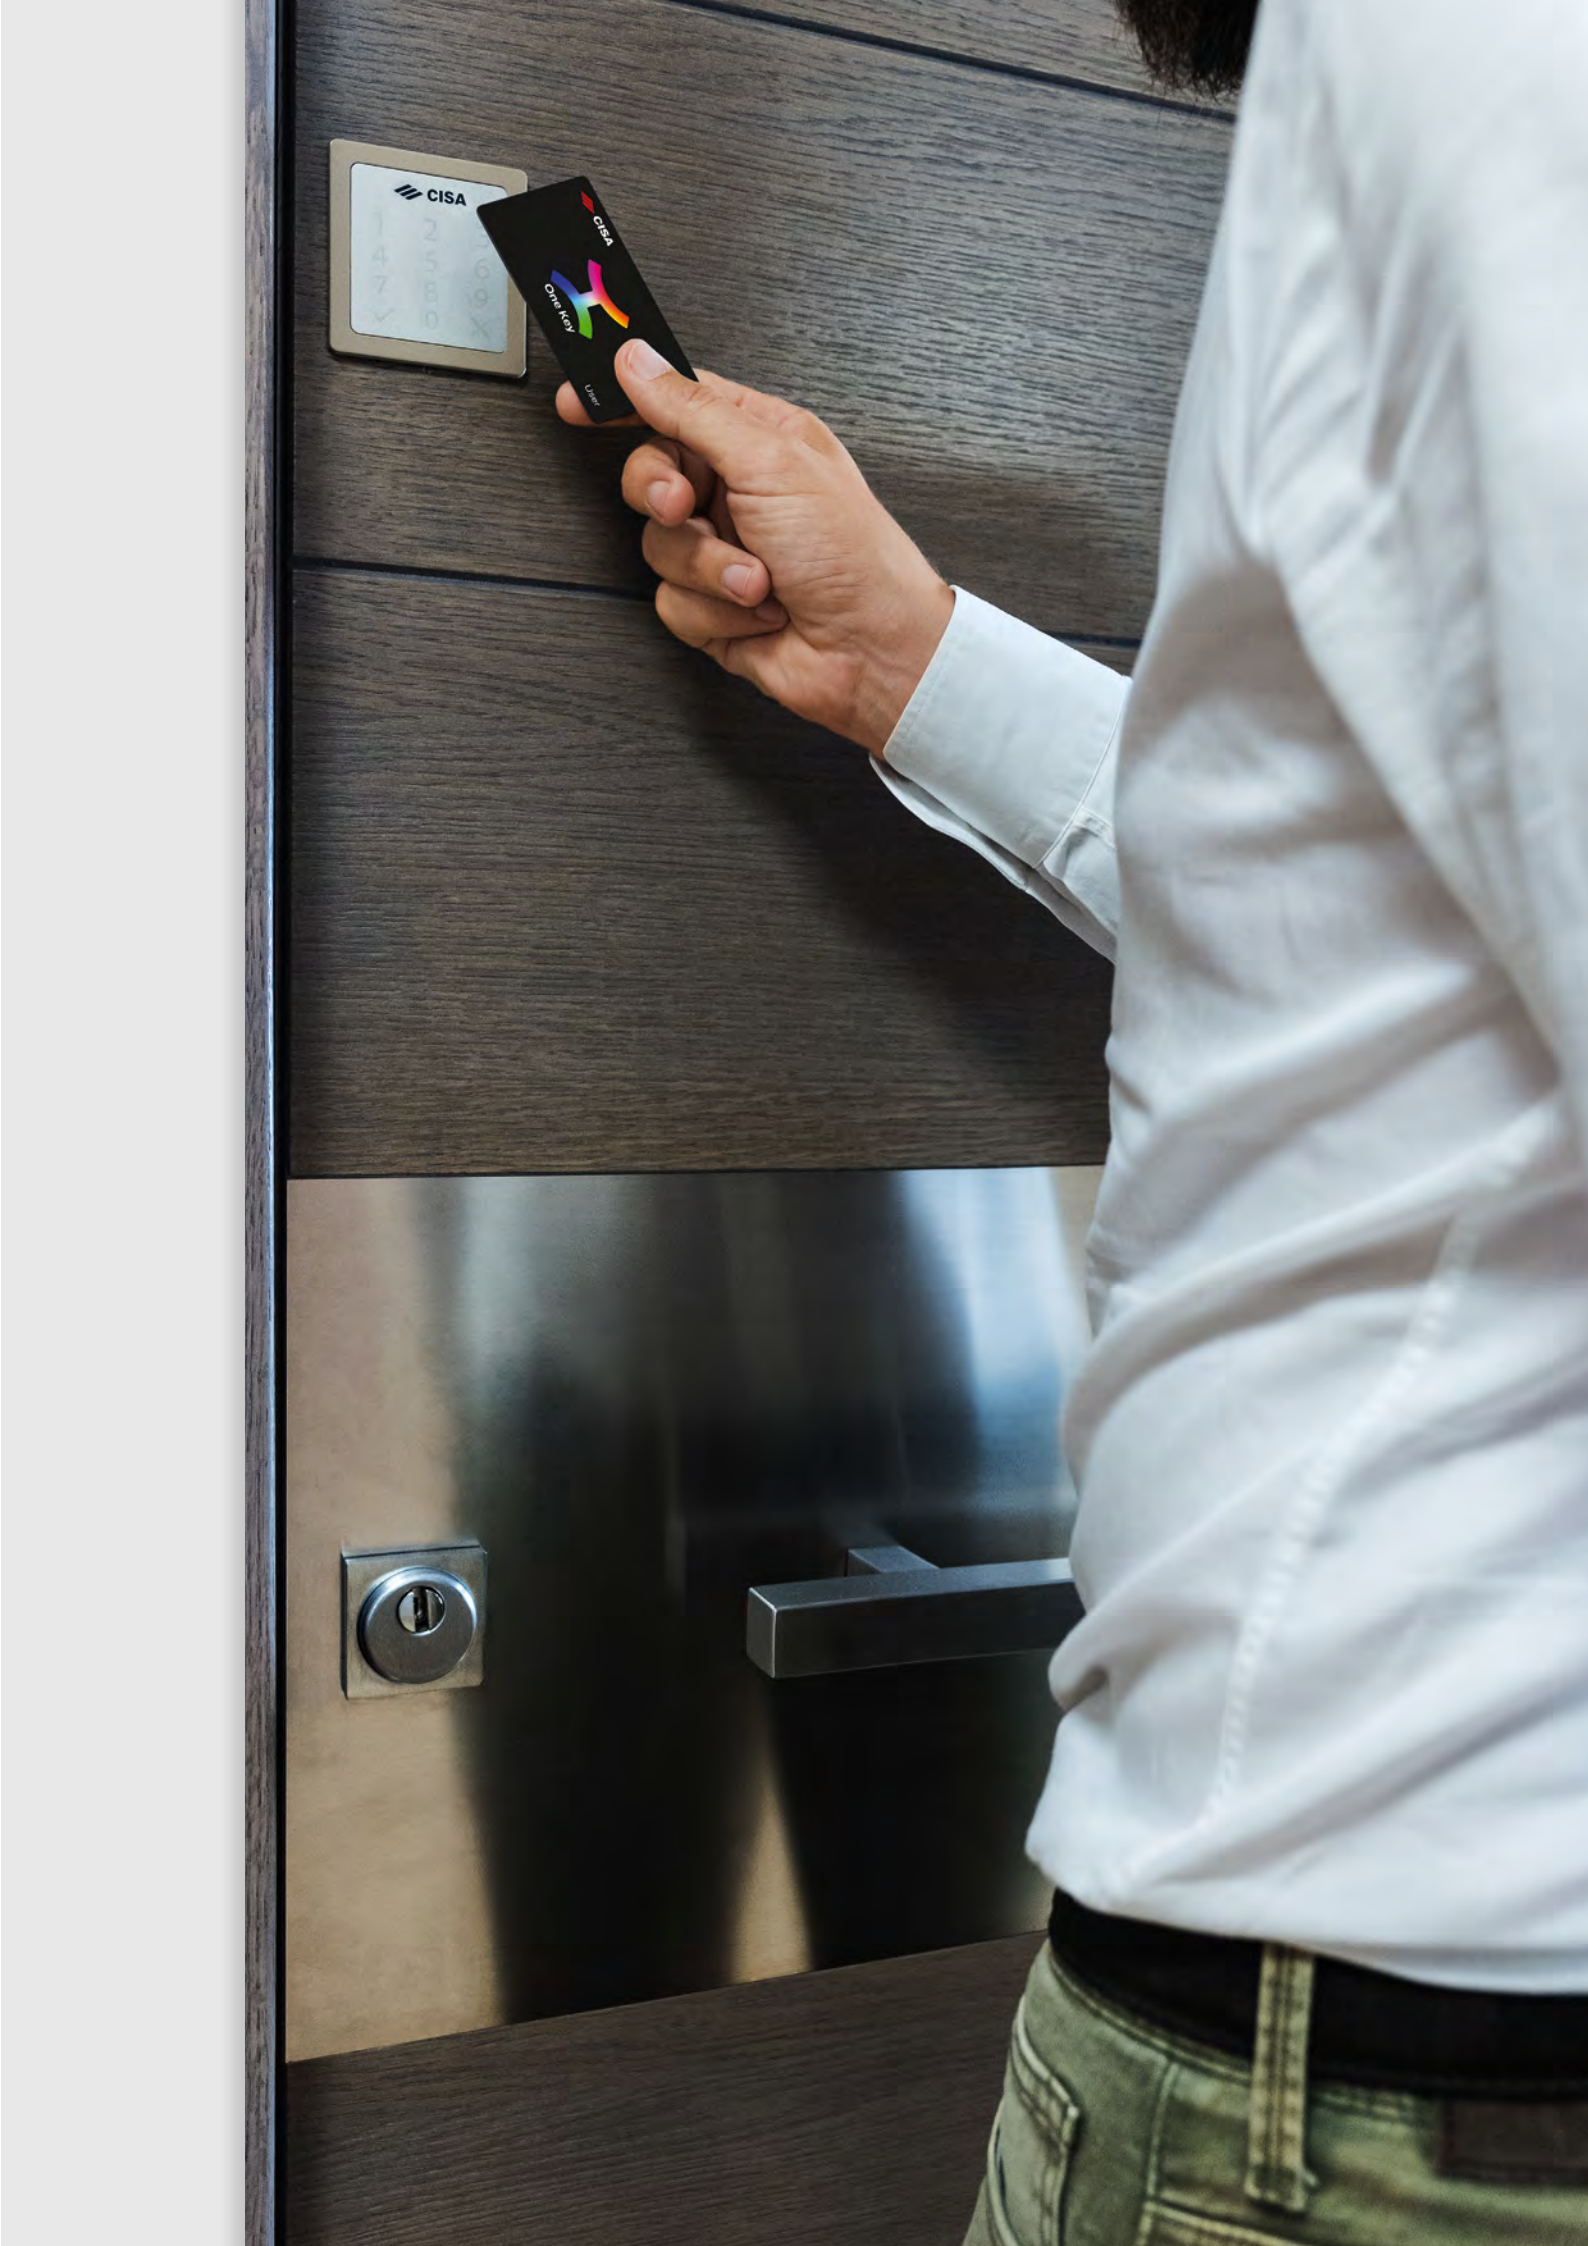

MyEVO



1. LOCK

The lock is available in the mortise and rim versions with a non-handed latchbolt.




2. KEYPAD AND BUTTON

The internal button and external keypad allow you to open the door without a key and to configure the lock.



3. DOOR STATUS DEVICE

Detects door status (if it is open or closed).

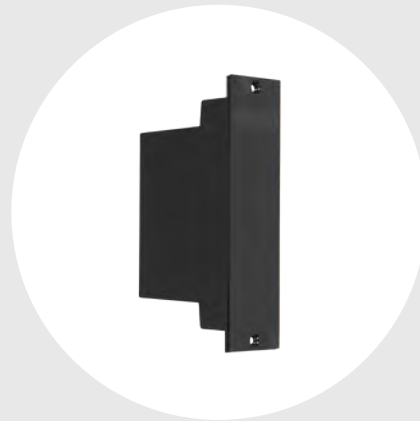

4. BATTERY COMPARTMENT

As an alternative to the electrical system, the lock can be powered by disposable or rechargeable batteries housed in a compact box.



CISA RECOMMENDS

INCREASE YOUR LEVEL OF SECURITY.
Combine **AP4 S** or **RS3 S** and protective rose with MyEVO for maximum protection against forced entry.



2



3



4


1





- JUST ONE SIMPLE ACTION AND YOU ARE SAFE
- QUICK AND EASY TO OPEN
- PERSONALISED ACCESS WITHOUT KEYS

Motorised lock

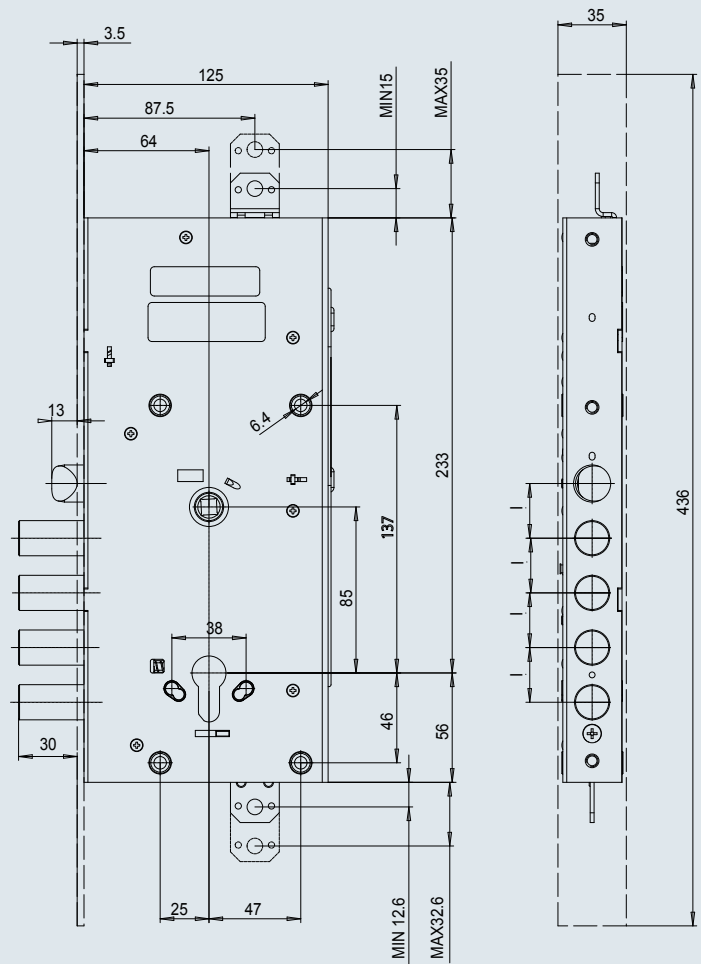

SECURITY AND PERFORMANCE

- Grade x certified high-performance motor (200,000 cycles with lateral thrust of 120N on the latchbolt).
- Anti-intrusion security certified grade 6 which rises to grade 7 if an anti-drilling protective plate is applied.
- Can be configured to operate in automatic, semiautomatic or hold open mode.
- Silent mechanics.
- Configuration chosen simply on keypad or by button or transponder.
- Mechanical opening guaranteed using a traditional key.
- Available in rim and mortice versions.




External keypad and transponder



ACCESS SELECTION AND VERSATILITY

- Quick and easy to install.
- Can be positioned where you want.
- Resistive backlit membrane keypad.
- Ergonomic and user-friendly.
- Used to configure operating modes: automatic, semi-automatic or hold open.
- Sound and light signal anomaly.
- Secure encoding system.
- Protective rose in different finishes.

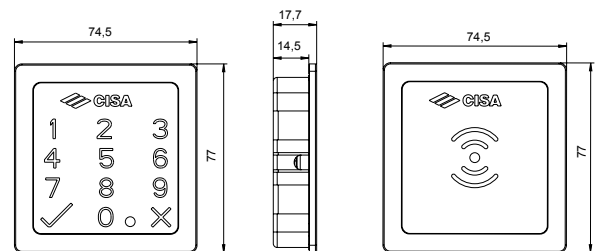

Three different operating modes:
keypad, keypad + transponder, transponder only.

KEYPAD FINISHES



L6 - graphite black



L7 - dove grey



L8 - aluminium




L9 - white pearl

Internal button



EASY TO OPEN AND CONFIGURE

- Quick and easy to install.
- Can be positioned where you want.
- Ergonomic and user-friendly.
- Used to configure operating modes: automatic, semi-automatic or hold open.
- Light signals anomaly.
- Protective rose in different finishes.



BUTTON FINISHES



L6 - graphite black



L7 - dove grey



L8 - aluminium



L9 - white pearl

POWERED BY ELECTRIC SYSTEM

Installation options



The lock can be installed and powered in three different ways.

**POWERED BY DISPOSABLE BATTERIES:
12 X 1.5 V AA BATTERIES**



**POWERED BY RECHARGEABLE BATTERIES
THROUGH THE DOOR STATUS DEVICE**




**DOOR STATUS DEVICE - FUNCTIONALITY
AND DESIGN**

- CISA patented solution.
- Self-regulating distance between contacts.
- Can be positioned where you want.
- Replaces the conventional cable guard if installed with rechargeable batteries.
- Contacts do not catch when the door is closed.
- Clean, crisp installation with no protrusions.

**BATTERY HOLDER - PRACTICAL
TO USE**

- Compact size.
- Can be positioned where you want.
- Easy to replace batteries.
- Uses off-the-shelf batteries.

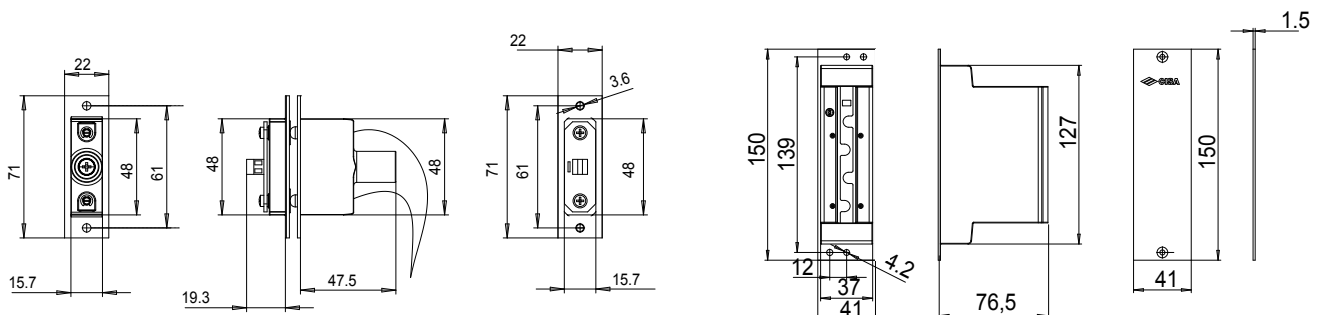

Configure your door

MyEVO is completely modular. Just choose the items you need to configure your own personalised solution.



POWERED BY ELECTRICAL SYSTEM

ITEMS NEEDED TO INSTALL THE LOCK



RIM LOCK

	no. deadbolts	deadbolts protrusion	deadbolts centre distance
1 E6516 28 0	4	3.5	28
1 E6516 38 0	3	3.5	38

MORTICE LOCK

1 E6536 28 0	4	-	28
---------------------	---	---	----



Contacts strip for Door Status device item 1 06510 50 0 supplied as standard with the lock



POWER SUPPLY

input 100-240V; 50-60Hz; output 24V CC; 1.3A



POWER SUPPLY CABLE

1 07030 70 0



CABLE GUARD WITH SPRING

1 06515 00 0

CHOICE OF OPENING CONTROL



EXTERNAL KEYPAD AND TRANSPONDER

1 06525 73 0 L6	Graphite black
1 06525 73 0 L7	Dove grey
1 06525 73 0 L8	Aluminium
1 06525 73 0 L9	White pearl



INTERNAL BUTTON

1 06525 51 0 L6	Graphite black
1 06525 51 0 L7	Dove grey
1 06525 51 0 L8	Aluminium
1 06525 51 0 L9	White pearl

OPTIONAL ITEMS



CABLE TO OPEN USING REMOTE CONTROL

1 07030 72 0

POWERED BY DISPOSABLE BATTERIES



RIM LOCK

	no. deadbolts	deadbolts protrusion	deadbolts centre distance
1 E6516 28 0	4	3.5	28
1 E6516 38 0	3	3.5	38

MORTICE LOCK

1 E6536 28 0	4	-	28
---------------------	---	---	----



Contacts strip for Door Status device item 1 06510 50 0 supplied as standard with the lock

POWERED BY RECHARGEABLE BATTERIES



RIM LOCK

	no. deadbolts	deadbolts protrusion	deadbolts centre distance
1 E6516 28 0	4	3.5	28
1 E6516 38 0	3	3.5	38

MORTICE LOCK

1 E6536 28 0	4	-	28
---------------------	---	---	----



Contacts strip for Door Status device item 1 06510 50 0 supplied as standard with the lock



BATTERY HOLDER

1 07030 80 0



24 V CC POWER SUPPLY

input 100-240V; 50-60Hz;
output 24V CC; 1.3A



BATTERY HOLDER

1 07030 80 0



EXTERNAL TRANSPONDER

1 06525 75 0 L6	Graphite black
1 06525 75 0 L7	Dove grey
1 06525 75 0 L8	Aluminium
1 06525 75 0 L9	White pearl



EXTERNAL KEYPAD

1 06525 71 0 L6	Graphite black
1 06525 71 0 L7	Dove grey
1 06525 71 0 L8	Aluminium
1 06525 71 0 L9	White pearl



USER CARD

1 06526 11 0	kit of 5 cards
---------------------	----------------



USER MINI CARD

1 06526 21 0	kit of 5 mini cards
---------------------	---------------------

Supplied as standard with Transponder series 06525 73/75



CABLE GUARD WITH SPRING

1 06515 00 0



MASTER AND RESET CARD KIT

1 06526 40 0

Supplied as standard with Transponder series 06525 73/75



CHANGE AND SAFE MODE CARD KIT

1 06526 30 0



eFAST

Panic exit
solutions



eFAST

1. PANIC EXIT DEVICE

It can be easily installed on all types of doors and is available in a variety of finishes.




2. ANTIBACTERIAL

Protection is achieved thanks to an antibacterial powder coating which prevents the spread of microorganisms.


**CISA
FAST
PLUS**
ANTIBACTERIAL
PROTECTION

3. PAIR OF LATCHBOLTS

Additional locking points can be installed with a quick-lock system.

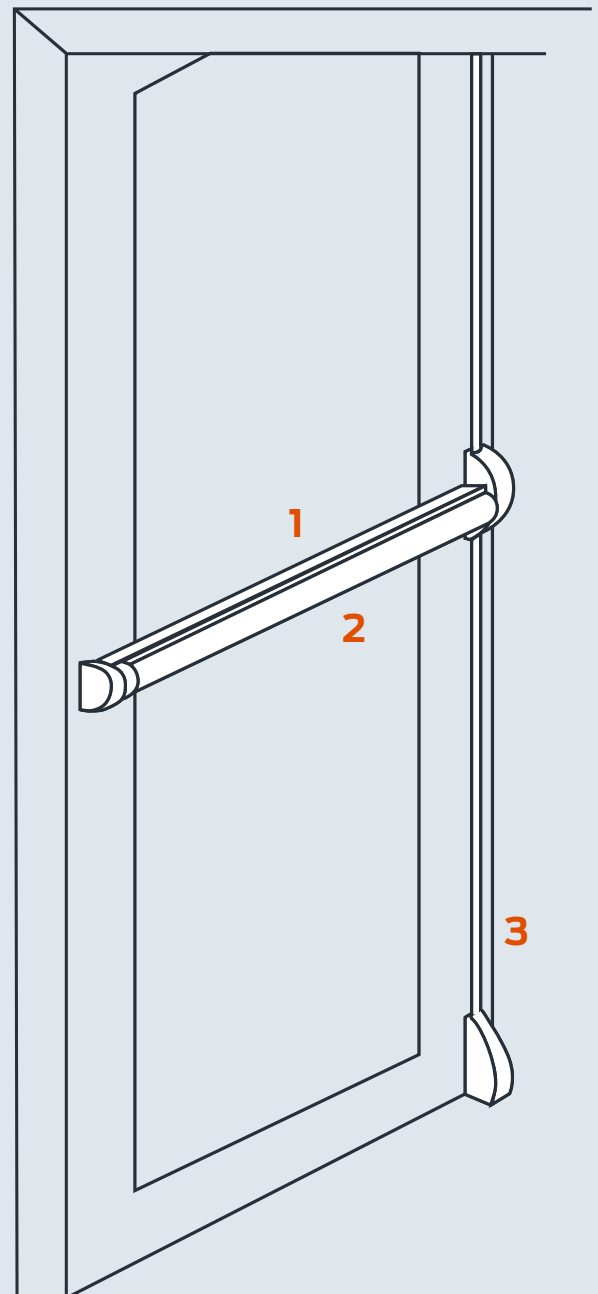

INSIDE

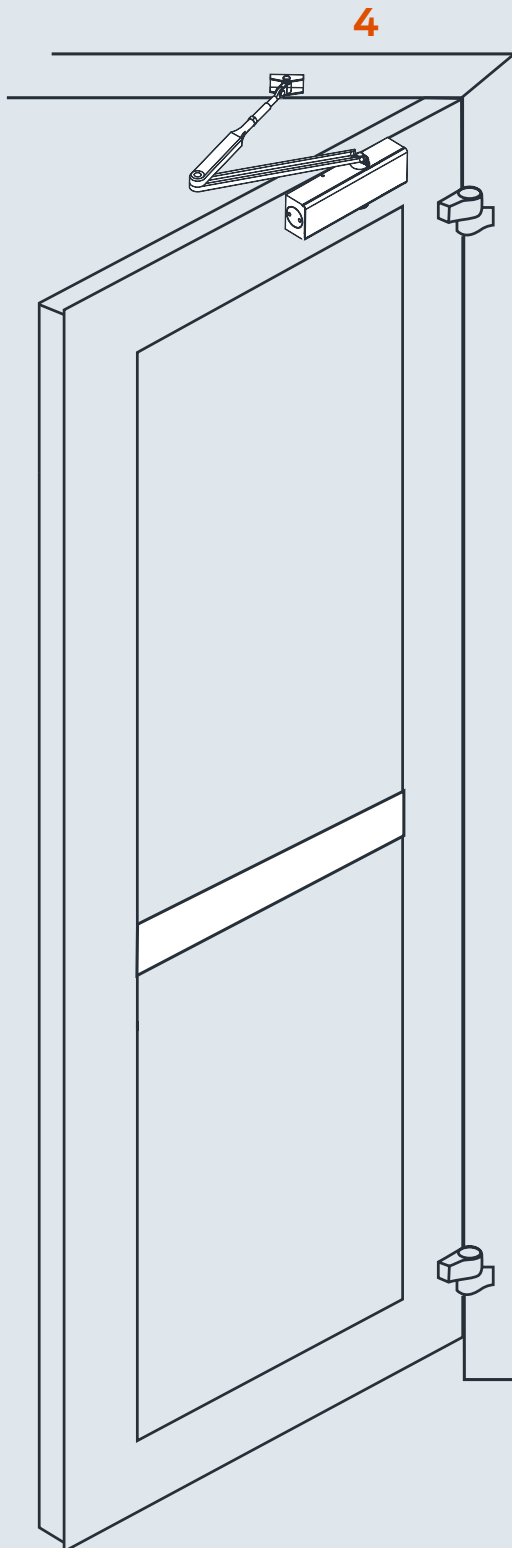

OUTSIDE

4. DOOR CLOSERS

They are designed to facilitate the initial pushing stage, making it easier to open the door. They are available in a number of versions and can be installed on different types of doors.



5



5. CISA KEY PAD

Cabled key pad to control each access. The motorised panic exit device can be integrated into an existing access control system.



SIMONSVOSS SYSTEMS

SimonsVoss systems can be installed as an alternative to the CISA key pad, choosing from a wireless key pad or a transponder.



eFAST



CISA eFAST motorised panic exit devices can increase security levels and performance wherever they are installed: schools and universities, offices and companies, hotels and B&Bs, hospitals.

CISA eFAST motorised panic exit device delivers innovative methods for opening doors and managing access control establishing hierarchical rights and timings.

The motorised solution can be installed to upgrade a mechanical version, enabling you to control access from the outside. It can be connected with existing access control systems. The key pad or transponder allow efficient management of staff and widespread entry control.



On request:

■ CISA systems:



cabled key pad to control each access
code 1 06525 75 0 B1

■ SimonsVoss systems:




Wireless key pad
code MTRAPINCODE



Transponder
code MTRAZ

Benefits and features

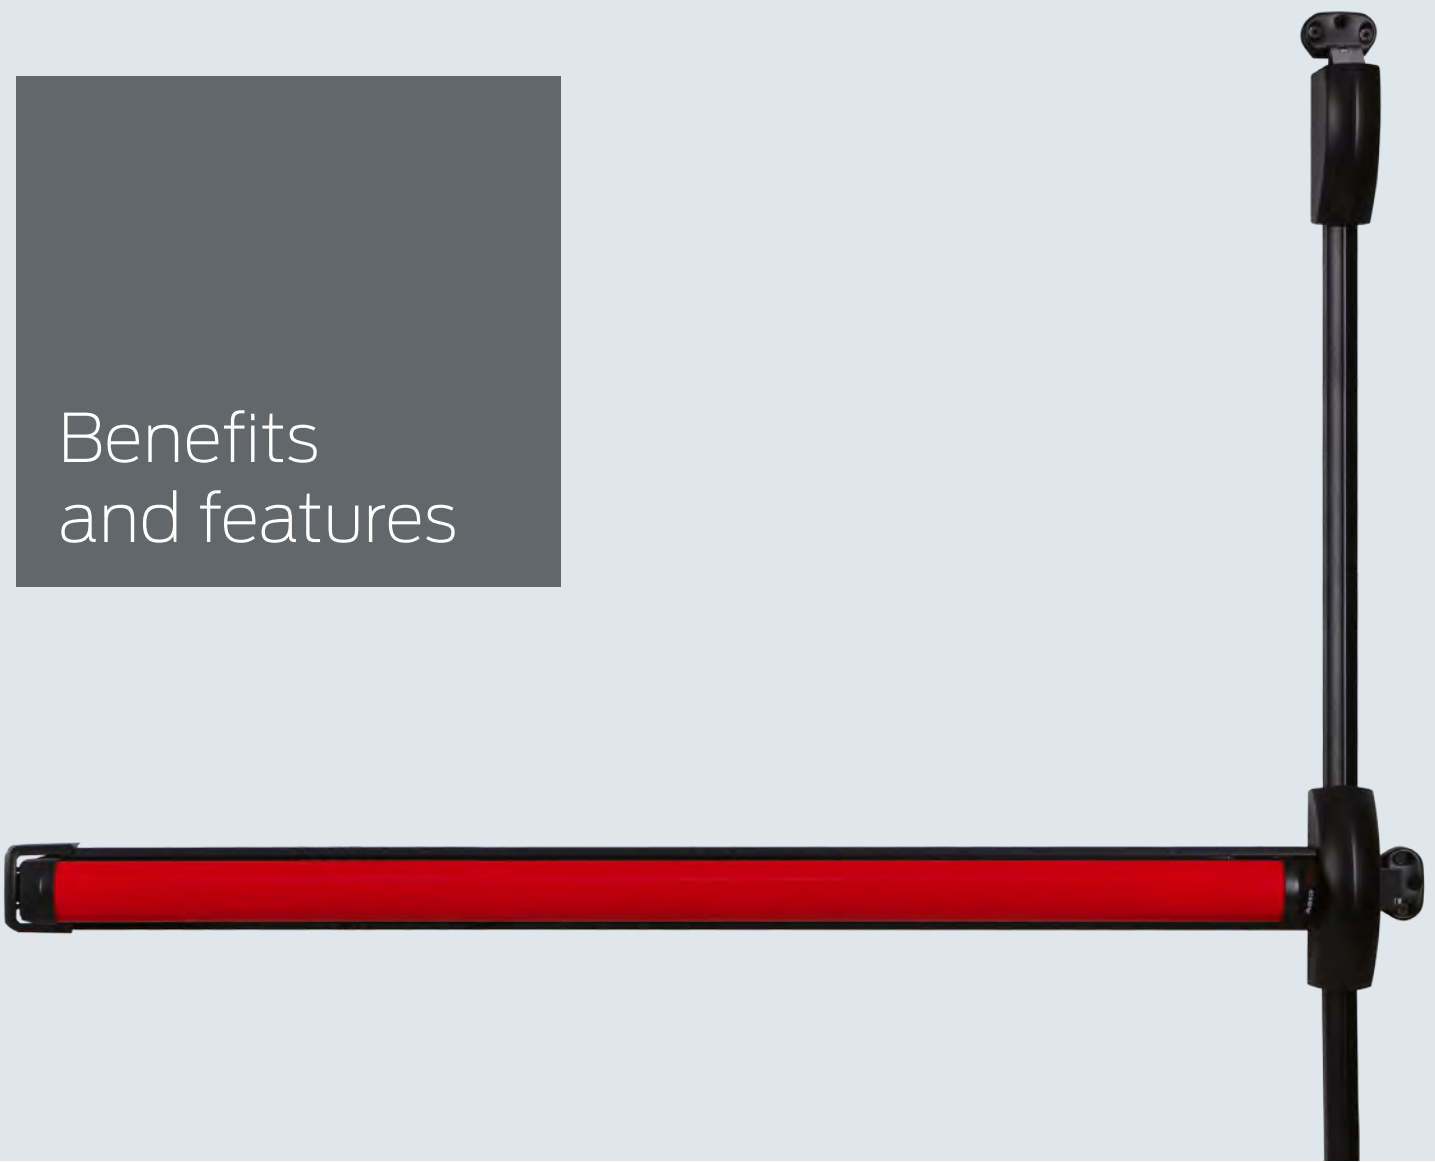

ANTIBACTERIAL PROTECTION

CISA FAST PLUS protects, thanks to an antibacterial powder coating which prevents the spread of dangerous microorganisms and the growth of fungi and bacteria.



MAXIMUM SECURITY

Thanks to the system which blocks the door in three different points, the risk of forced entry is reduced and closing becomes smooth and silent, the ideal solution for locations with heavy human traffic.

CERTIFICATIONS AND MARKINGS

The materials used and the technical solutions adopted are in compliance with the strictest regulatory requirements. This has enabled CISA to obtain the CE Marking in compliance with the Construction Products Regulation No. 305/2011.

The product is also in compliance with the Electromagnetic Compatibility (EMC) Directive 2014/30/EU for residential and industrial applications.

OPERATION

The panic exit device has the same features as the mechanical version, in compliance with EN1125, but offers an additional electronic opening function.



Panic exit devices series 59351



Pair of latchbolts for lateral locking point cod. 1 07063 51 0



Pair of latchbolts for top/bottom locking points cod. 1 07063 61 0

FEATURES

- CE-marked
- Non-handed
- Panic exit device can be shortened to 600 mm
- Rim version
- Can be integrated into an existing access control system.
Can also be controlled by a button
- Power supply 12-20V AC, 12-24V DC
- Max. current absorption 1.5A
- Current absorption in standby: 5mA
- Length of connecting cable 4 m
- Operating temperature from -10 to +50°C
- Power supply not supplied. A 12V AC transformer is available on request
- Opening acoustic alarm
- Timed latch withdrawal after opening, adjustable from 3 to 30 seconds
- Possibility of installing an electric hold open device

Power supply features: 12/24 V AC DC 30W

Finishes and accessories codes



PANIC EXIT DEVICES FINISHES

Standard

Black casing, red bar

On request

White
RAL 9010

Fin. 45

Grey
RAL 9006

Fin. 97

Stainless
steel grey

Fin. B9

PVD
Satin finished
stainless
steel

Fin. C2

KEY PAD FINISHES


Standard

Shiny black

On request

Satin finished
chrome

Fin. B1

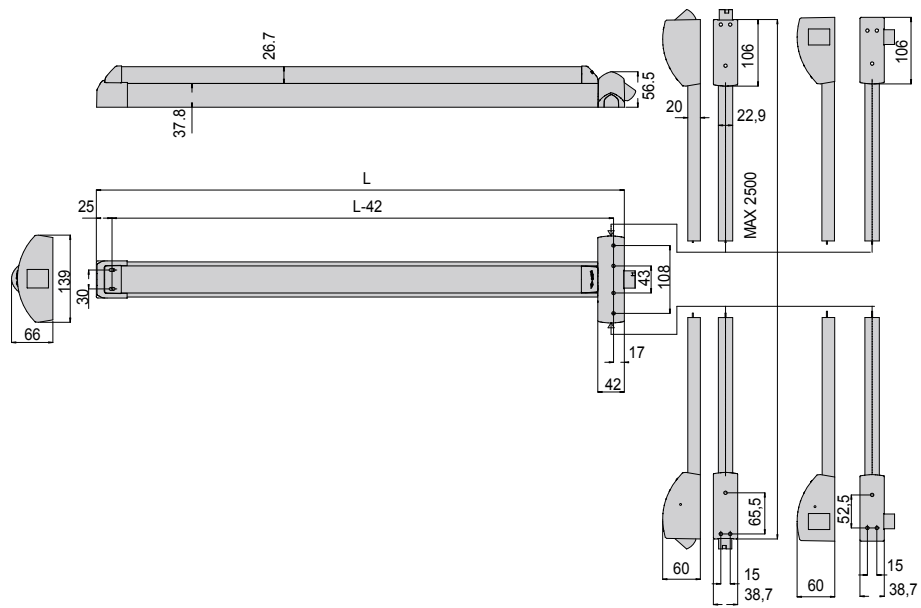

CISA eFAST

ITEM

159851 09 0	L 1.300	Motorised modular panic exit device Also available for fire doors (spec. FR)
159851 10 0	L 1.200	
159851 11 0	L 840	

ITEM

ON REQUEST

107063 51 0	Pair of latchbolts for lateral locking point
107063 61 0	Pair of latchbolts for top/bottom locking points

ITEM

ACCESSORIES

106515 00 0	Concealed cable guard
--------------------	-----------------------

ITEM

106515 15 0	Internal cable guard with spring
--------------------	----------------------------------







ITEM

106515 21 0	L 600	External cable guard with spring
106515 20 0	L 300	External cable guard with spring

ITEM

FINISH


106525 75 0	Shiny black
106525 75 0 B1	Satin-finished chrome

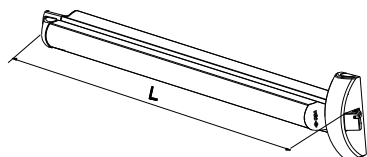



CISA POLARIS

Emergency
light system for
panic exit devices.

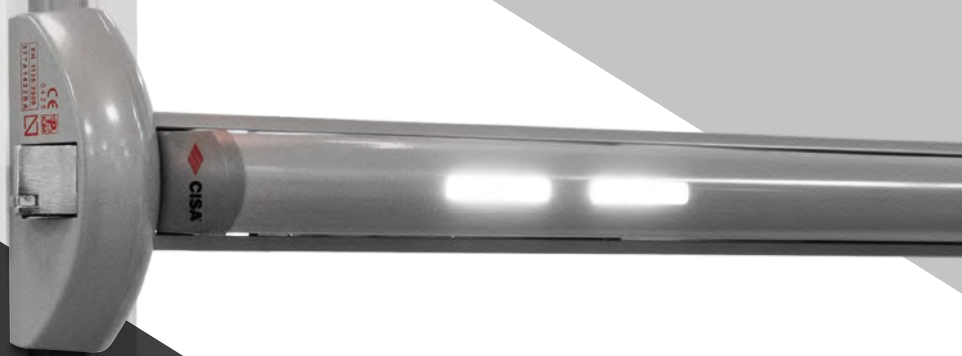

Education




Residential



Commercial



Healthcare



Hospitality

Features and finishes

TECHNICAL FEATURES

- Painted steel bar
- ABS inserts
- Can be shortened up to mm 600 (for Fast touch) and mm 720 (for eFast)
- LEDs (120 lumen)

SUPPLIED AS STANDARD


- Steel bar
- LED lights
- Wiring

FINISHES


Black Fin. 00	Red Fin. 41	White RAL 9010 Fin. 45	Grey Fin. 97
Green Fin. 43	Yellow Fin. 42	Painted stainless steel Fin. B9	PVD stainless steel Fin. C2



Technical data sheet

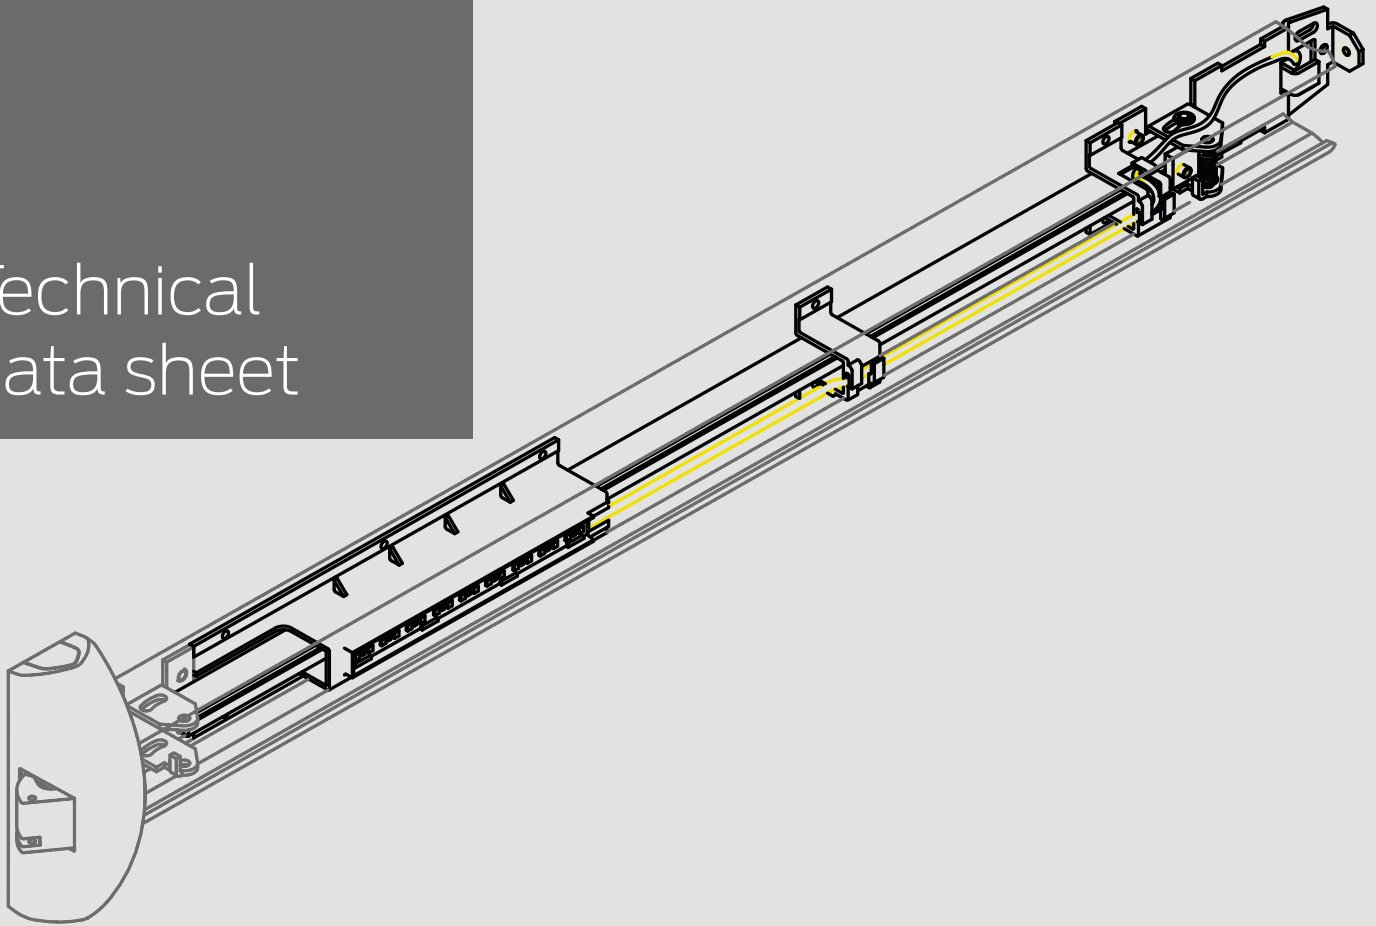

TYPE	DESCRIPTION	FOR SERIES	L	kg		ITEM		
				UNIT WEIGHT	No. PIECES	TYPE	DIM.	HAND



Polaris kit containing bar, LEDs and wiring components.

To activate the **emergency** or **light** function, CISA Polaris must be connected to a special transformer (not supplied) with the characteristics indicated on the instruction sheet.

59711
59801
59811
59816
59851

1200 1.300 1 1 06196 60 0

To achieve **emergency or lighting function**, CISA Polaris must be connected to a special power supply (not supplied) with the following features:

Configuration with Direct Network Power:

- Mains power supply, 12VDC 30W output, Class B

Emergency light configuration in the absence of mains voltage:

- Mains power supply with battery charging function, 12VDC 30W output, Class B
- Rechargeable battery (12V DC, > 1.2Ah)
- NC-NO monostable relè with main power coil

SPECIFICATIONS

Bar for FAST Touch rim and mortice panic exit devices and eFAST panic exit devices with LED lights powered by a special 12 V AC power supply.

Two possible functions: emergency (the lights come on when power fails) and light (the lights are controlled by a switch).



CISA[®]

Outside Access
Devices




CISA
FAST
R-US

CISA

Emergency exits are:

- the main entrance of a building, used frequently throughout the day
- used by people with disabilities
- part of a master key system to manage access
- kept closed, if necessary, to control access

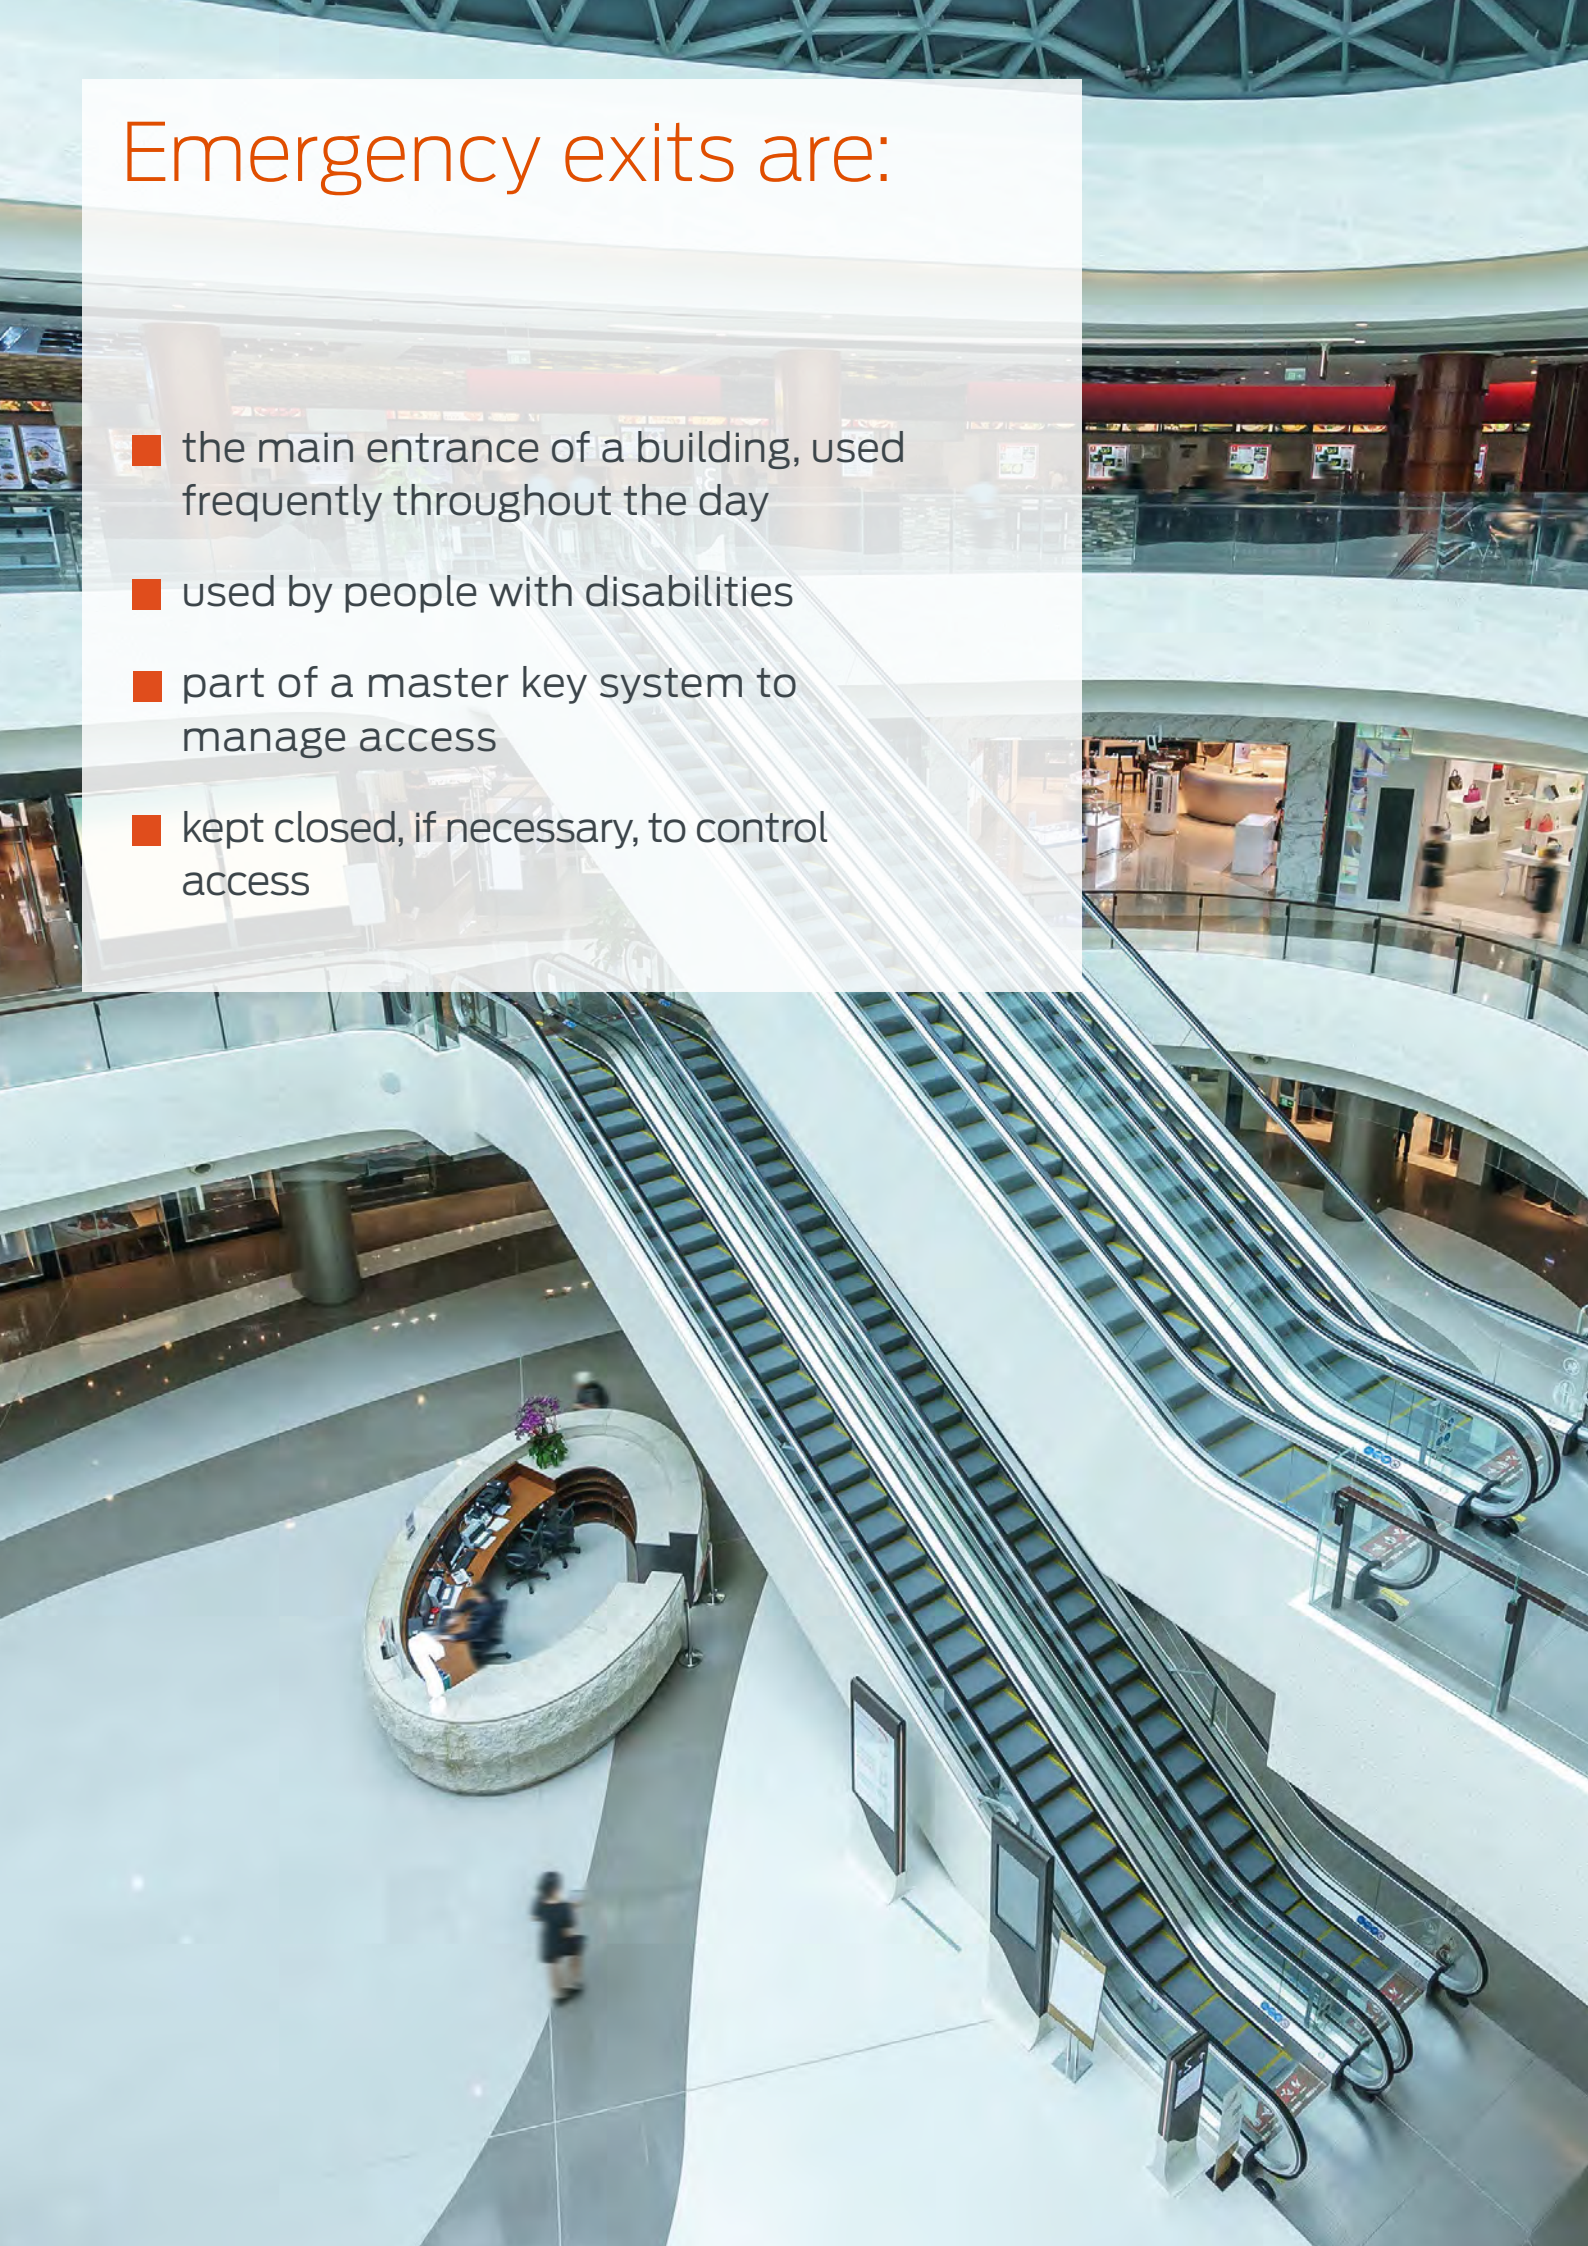

Outside access devices are used by people with different needs

**I want to
integrate the
OAD easily
into an access
management
system**

**I need to keep the
door locked for
security reasons**

**If I change
something, I want
to be able to use
the same holes**



**CISA panic exit
solutions:
outside access
devices**



Design



New lever design

- Longer lever handle available (+55 mm for item 1.07078.68) for easier grip
- Return to door lever design prevents clothing from getting caught

The ideal solution when installing in reduced spaces

- Version with lower lever (item 1.07078.36.0)
- 47mm protrusion from the door, ideal in reduced spaces

Easier to open/close without catching fingers

- Lever is positioned below the cylinder, leaving more space to rotate and reducing the risk of hitting fingers against the cylinder
- Easier to insert and turn the key


Enhanced MK potential

Master key systems are the most convenient, value-for-money solution to manage access in public or commercial settings, guaranteeing maximum security and protection for the building at all times.

One key unlocks several different doors and is managed accordingly. Only those with access rights are granted entry to certain areas.

Devices can be integrated into an access management system

- 707836/38 range with a Euro profile cylinder, the OAD can be integrated into a master key system

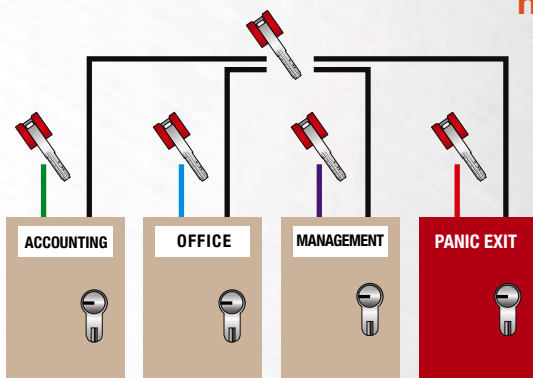

Interchangeability



Same footprint on both versions

- The new OAD is perfectly interchangeable with previous versions

Finishes

The outside access devices are available with the following finishes: painted steel grey, white and grey. A satin finished PVD-treated stainless steel finish is also available.






Lever

Item 1.07078.36

Item 1.07078.38



- **Euro profile cylinder**
Easy to integrate into existing MK systems by simply replacing the cylinder
- **Cylinder positioned above the lever**
Easier to insert the key, operate the cylinder to open/close and use the lever
- **Version with lower lever**
Can be installed when space is restricted
- **Return to door lever**
Increased safety, preventing clothing from getting caught
- **The handle lever can rotate freely when the OAD is closed**
Reduces the risk of breakage due to accidental forcing or vandalism
- **Key can be extracted only when the door is locked (selectable function)**
You can be sure the door is locked if you have the keys in your hand
- **Heavy duty**
Tested up to 200,000 cycles
- **Positioning pin**
Stops the lever body from rotating when installed

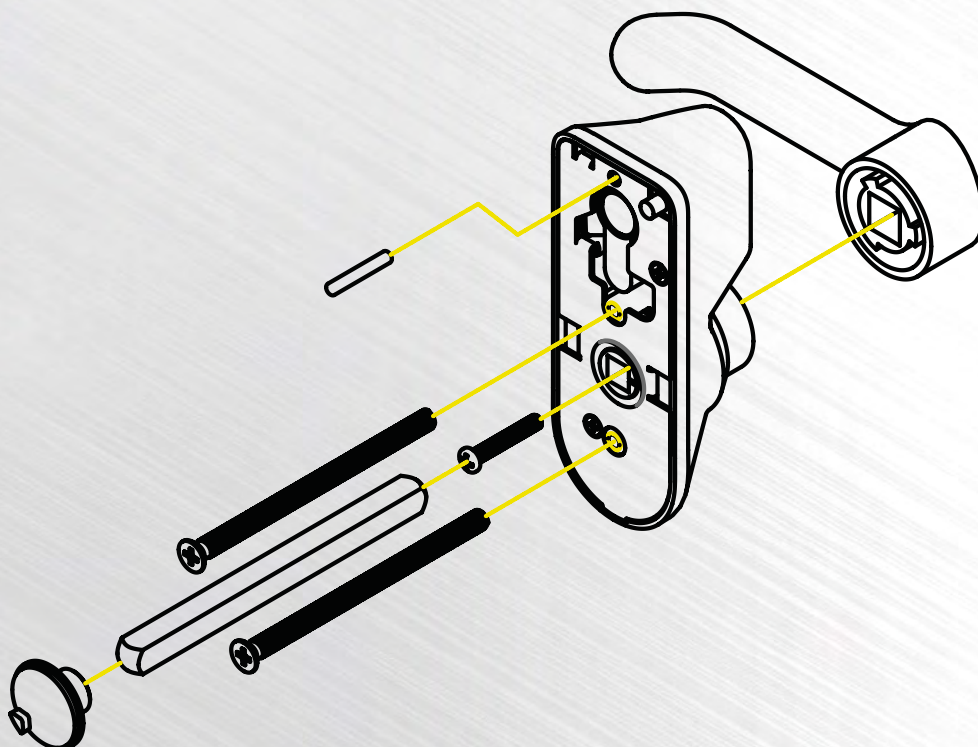

Lever

Item 1.07078.68



■ Increased lever length

Lever length increased by 55mm for better grip

■ Perfectly interchangeable with all previous versions

Adjustable fixing bar

■ Euro profile cylinder

Easy to integrate into existing MK systems by simply replacing the cylinder

■ Return to door lever

Increased safety, preventing clothing from getting caught

■ The handle lever can rotate freely when the OAD is closed

Reduces the risk of breakage due to accidental forcing or vandalism

■ Key can be extracted only when the door is locked (selectable function)

You can be sure the door is locked if you have the keys in your hand

■ Variable lever rotation with reduction gear

Door can be opened with less rotation of the handle.

■ Heavy duty


Tested up to 200,000 cycles

■ Lever opening directions

The lever can also be pushed upwards for easy access for the disabled

■ Positioning pin

Stops the lever body from rotating when installed

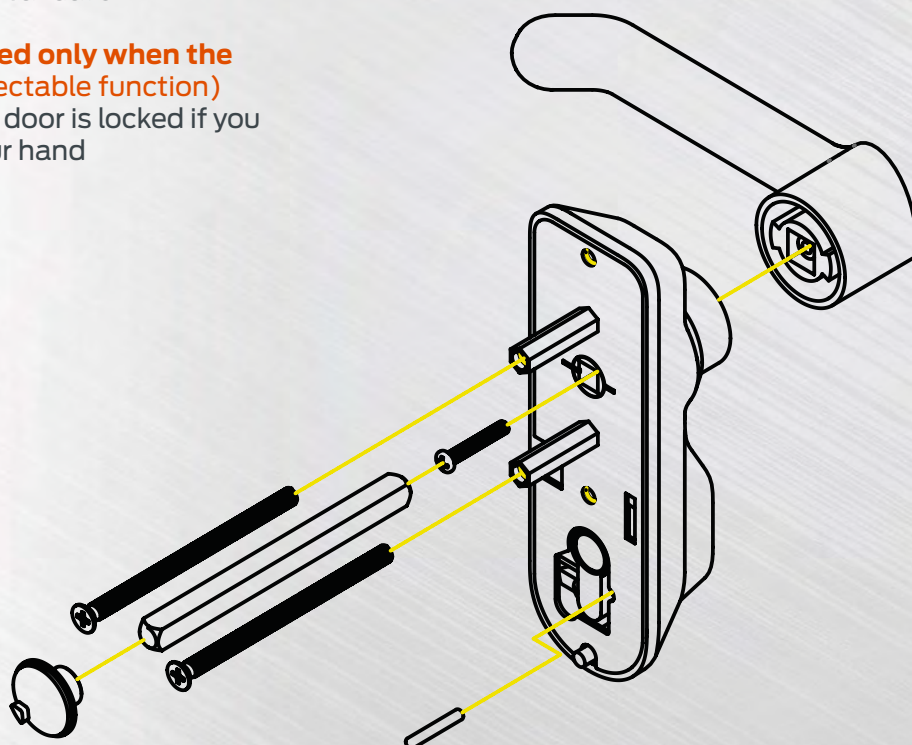

Knob

Item 1.07078.69



Rotating knob

Can be installed in reduced spaces or when a lever handle is not needed

Adjustable fixing bar

Perfectly interchangeable with all previous versions

Euro profile cylinder

Easy to integrate into existing MK systems by simply replacing the cylinder

The knob can rotate freely when the OAD is closed

Reduces the risk of breakage due to accidental forcing or vandalism

Key can be extracted only when the door is locked

You can be sure the door is locked if you have the keys in your hand (selectable function)

Variable lever rotation with reduction gear


Door can be opened with less rotation of the knob.

Heavy duty

Testato fino a 200.000 cicli

Positioning pin

Stops the knob body from rotating when installed

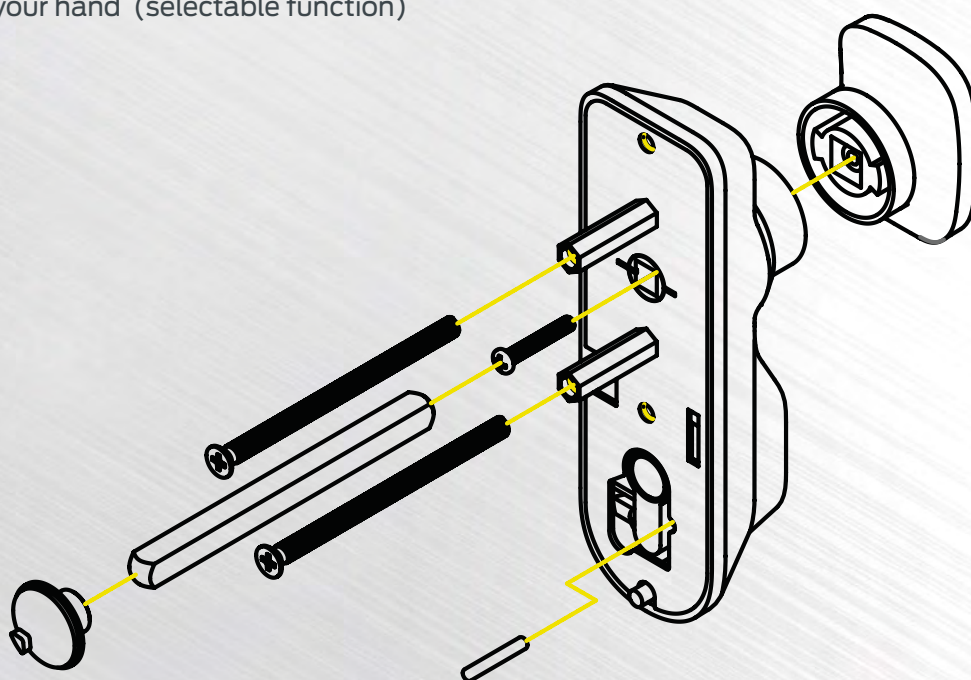

Cylinder installation only



■ Cylinder

The cylinder can only be used with panic exit devices from the CISA FAST Push and Touch series


■ Installation

Ideal for panic exit devices with a fixed handle on the outside or where an OAD is not needed


■ Easy to install

The holes on the mounting plate make cylinder installation quick and easy without having to use the internal plate


Dimensional drawings

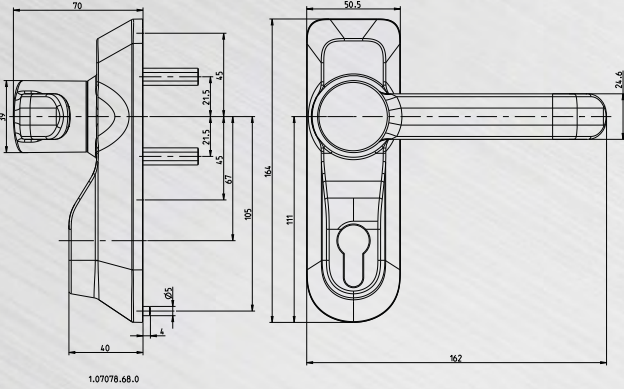


1.07078.68.0

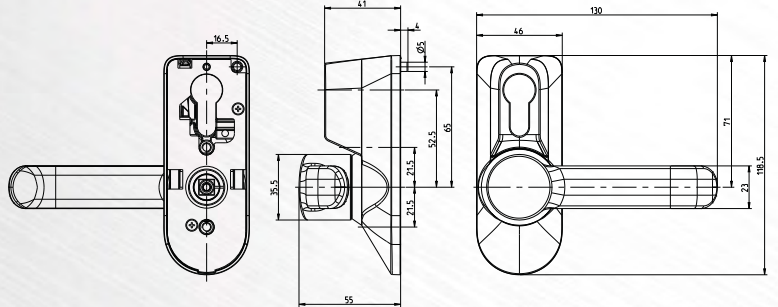



1.07078.38.0


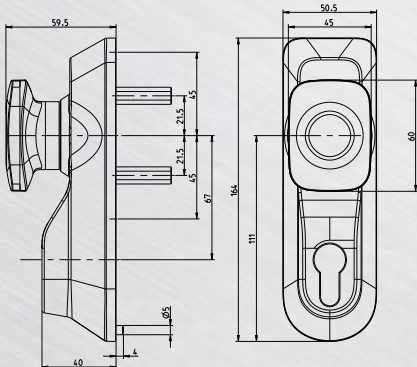


1.07078.69.0

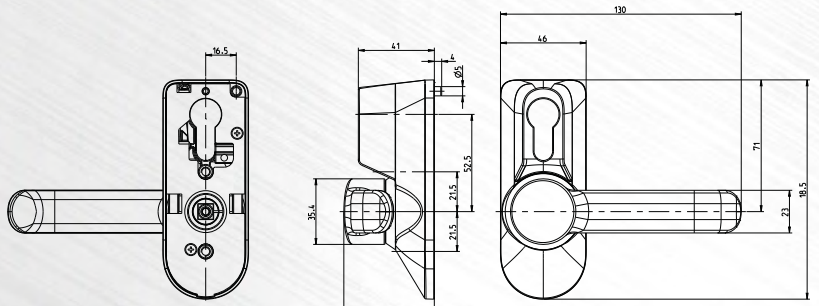






1.07078.36.0


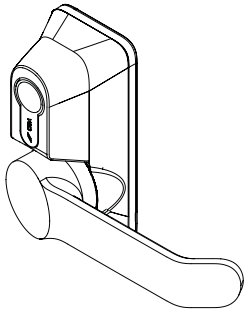
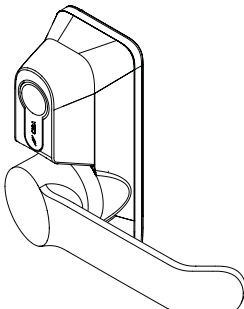
TYPE	DESCRIPTION	FOR SERIES/ITEM	kg		ITEM						
			UNIT WEIGHT	NO. PIECES	Type	Comm. Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> Plate with low profile handle Handle disabled with the key Nickel-plated cylinder Non-removable key setting (optional) <p>AVAILABLE FINISHES:</p> <ul style="list-style-type: none"> STEEL GREY painted (fin. B9) WHITE painted (fin. 45) GREY painted (fin. 97) 	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066	0,575	1	1	07078	36	0			
	<ul style="list-style-type: none"> Satin finished PVD-treated stainless steel plate and handle (fin. C2) Handle disabled with the key Nickel-plated cylinder Non-removable key setting (optional) <p>On request: version with microswitch (spec. LA)</p>	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066	0,575	1	1	07078	36	0	C2		
	<ul style="list-style-type: none"> Black painted plate and handle Handle disabled with the key Nickel-plated cylinder Non-removable key setting (optional) <p>AVAILABLE FINISHES:</p> <ul style="list-style-type: none"> STEEL GREY painted (fin. B9) White PAINTED (fin. 45) GREY painted (fin. 97) 	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066	0,595	1	1	07078	38	0			
	<ul style="list-style-type: none"> Satin finished PVD-treated stainless steel plate and handle (fin. C2) Handle disabled with the key Non-removable key setting (optional) 	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066	0,595	1	1	07078	38	0	C2		

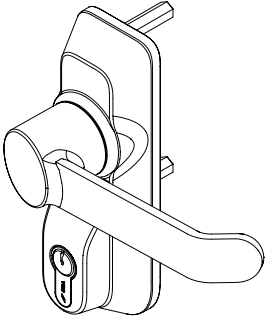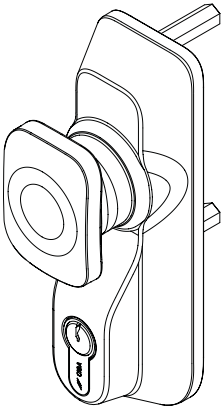TYPE	DESCRIPTION	FOR SERIES/ITEM	ITEM						
			UNIT WEIGHT	NO. PIECES	Type	Comm. Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> ▪ Black painted plate and handle ▪ Handle disabled with the key ▪ Nickel-plated cylinder ▪ Non-removable key setting (optional) <p>AVAILABLE FINISHES:</p> <ul style="list-style-type: none"> ▪ STEEL GREY painted (fin. B9) ▪ WHITE painted (fin. 45) ▪ GREY painted (fin. 97) 	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066, 59301, 59311, 59316	0,855	1	1	07078	68	0	
	<ul style="list-style-type: none"> ▪ Satin finished PVD-treated stainless steel plate and handle (fin. C2) ▪ Handle disabled with the key ▪ Nickel-plated cylinder ▪ Non-removable key setting (optional) <p>On request: version with microswitch (spec. LA)</p>	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066, 59351, 59361, 59366	0,855	1	1	07078	68	0	C2
	<ul style="list-style-type: none"> ▪ Black painted knob ▪ Knob disabled with the key ▪ Nickel-plated cylinder ▪ Non-removable key setting (optional) <p>AVAILABLE FINISHES:</p> <ul style="list-style-type: none"> ▪ STEEL GREY painted (fin. B9) ▪ WHITE painted (fin. 45) ▪ GREY painted (fin. 97) 	59311, 59316, 59801, 59811, 59816, 59051, 59061, 59066, 59301, 59001, 59011, 59016	0,775	1	1	07078	69	0	
	<ul style="list-style-type: none"> ▪ Satin finished PVD-treated stainless steel plate and handle (fin. C2) ▪ Nickel-plated cylinder <p>On request: version with microswitch (spec. LA)</p>	59001, 59011, 59016, 59801, 59811, 59816, 59051, 59061, 59066, 59351, 59361, 59366	0,775	1	1	07078	69	0	C2

CYLINDER APPLICATION ONLY

TYPE	DESCRIPTION	FOR SERIES/ITEM	kg		ITEM						
			UNIT WEIGHT	NO. PIECES	Type	Comm. Dim.	Hand	Fin.	Pers.	Spec.	
 <ul style="list-style-type: none"> ▪ C2000 cylinder ▪ C3000 cylinder ▪ ASIX cylinder ▪ ASTRAL cylinder ▪ ASTRAL TEKNO CYLINDER ▪ AP3 cylinder ▪ RS3 cylinder 			0,168	6	1	0G200	55	0	12		
			0,168	6	1	0N210	50	0	12		
			0,17	6	1	0E200	50	0	12		
			0,16	6	1	0A210	50	0	12		
			0,16	1	1	0M210	50	0	12		
			0,215	1	1	0H210	50	0	12		
			0,215	1	1	0L210	50	0	12		
 <ul style="list-style-type: none"> ▪ Outside access device key blank <p>Duplication is possible also for: 1.01336.00.1</p>			0,010	50	1	01310	05	1			
 <ul style="list-style-type: none"> ▪ Protective rose for nickel-plated tubular cylinder 			0,010	100	1	06018	25	0	12		
 <ul style="list-style-type: none"> ▪ Standard round cylinder 			0,180	6	1	02550	25	0	12		
 <ul style="list-style-type: none"> ▪ Follower and adaptor for cylinder installation only 			0,07	1	1	06198	70	0			

ACCESSORIES


TYPE	DESCRIPTION	FOR SERIES/ITEM	kg		ITEM						
			UNIT WEIGHT	NO. PIECES	Type	Comm. Dim.	Hand	Fin.	Pers.	Spec.	
 <p>Additional locking point kit for versions 1.07078.36/38 for doors 80 mm to 130 mm</p> <ul style="list-style-type: none"> ▪ For versions 1.07078.68/69 for doors 100 mm to 130 mm 			0,99	1	1	06316	04	0			
 <ul style="list-style-type: none"> ▪ Special follower for installation on SBlock Touch Bar for versions 1.07078.36/38/68/69 			0,05	1	1	06198	71	0			
 <ul style="list-style-type: none"> ▪ Microswitch for versions 1.07078.68/69 			0,20	1	1	06195	10	0			



Gate
always closed
and under control

The CISA gate closer is installed on pedestrian gates to ensure they close every time someone has gone

- Gate closes every time someone goes through
The gate closer is fitted with a spring mechanism.
- Exceptional performance at all times
The gate closer is not affected by sudden changes in temperature as it uses no liquids.
- Can be installed on gates of different weights and sizes
Suitable for gates with a width of up to 1200 mm and weighing a maximum 55 kg, thanks to the system which allows you to adjust the closing speed and intensity.
- Long life
The special anti-corrosion treatment and stainless steel adjusters have been specially designed for outdoor use, ensuring maximum durability over time.
- Environmentally friendly
No oils to dispose of.
- Does not affect the appearance of the gate

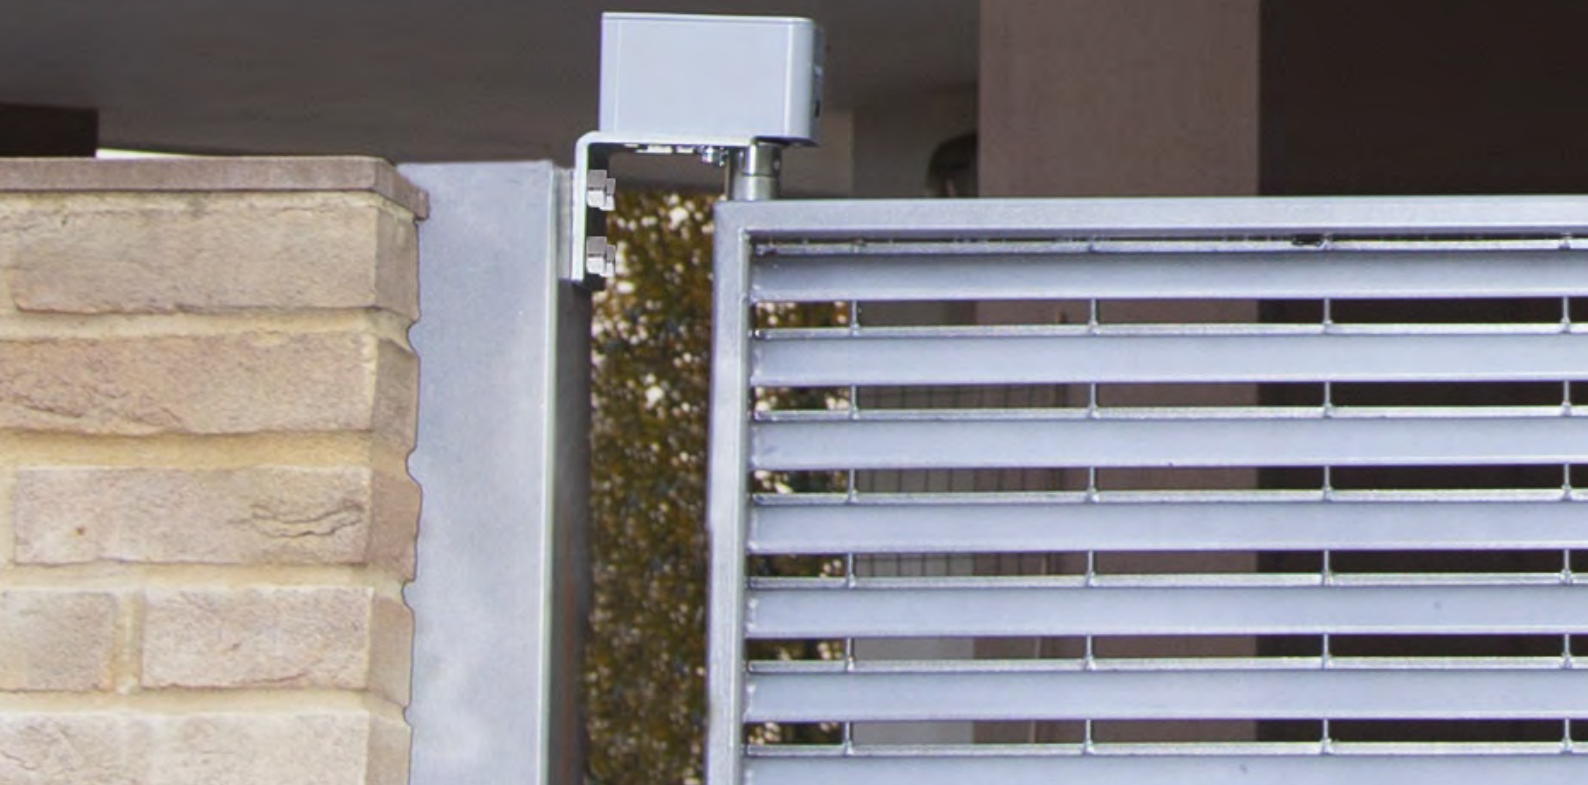

First installation

When installing the CISA gate closer for the first time, you can:

- Fit the gate closer to double up as the top hinge, using the accessories supplied.
- Use the gate closer paired with a lower hinge fitted with a bearing (not supplied).
- Save the cost of a hinge.



The CISA gate closer is welded to the gate and acts as an opening hinge.


Installation on existing gates

Installing the gate closer on existing gates is quick and easy:

- The CISA gate closer is simply lined up with the existing hinges using the special installation accessories.



Example of installation with sliding arm item 07155-06

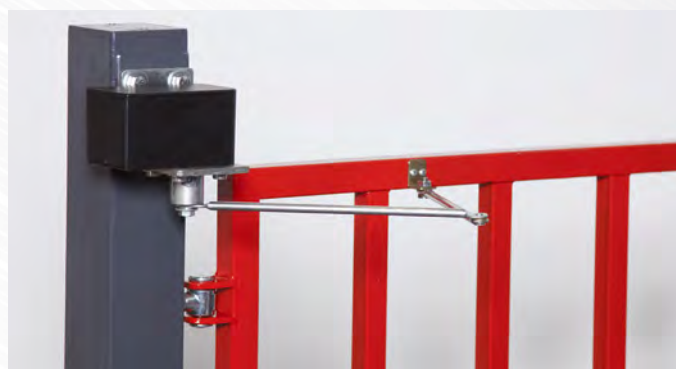

Example of installation with standard arm item 07155-05

Technical data sheet



TECHNICAL FEATURES

- Pressure die-cast aluminium case and cover, painted and anti-corrosion treatment (resists more than 500 hours in salt spray)
- Stainless steel adjusters
- Zinc-plated fixing screws
- Zinc-plated steel springs
- Tested for 200,000 opening and closing cycles

Operation

For use on gates up to 1200 mm and weighing a maximum of 55 kg

- Completely mechanical operation with no fluids (operates irrespective of outdoor temperature)
- Adjustable opening / closing force
- Adjustable closing speed
- Possibility of hold-open between 90° and 100°
- Maximum opening of gate 100°
- Courtesy opening function

- Possibility of inverting operation from “gate closer” to “gate opener”

Supplied as standard

- Zinc-plated adjustable corner mounting plate item 1.07155.01.0
- Fixing screws
- Instruction sheet









On request

- Plates for installation on different kinds of gates items 1.07155.02.0, 1.07155.03.0

Finishes

- Black
- Silver grey

SYSTEM PATENT NO. A000790, 2013

TYPE	DESCRIPTION	ITEM						
		UNIT WEIGHT kg	PIECES		Type	Dim.	Hand	Fin.
	■ BLACK gate closer	2.500	1	1	C1310	01	0	
	■ GREY gate closer	2.500	1	1	C1310	01	0	97
	■ Lower hinge	0.900	1	1	07155	04	0	
	■ Corner plate (supplied as standard)	0.450	1	1	07155	01	0	
	■ Flat plate	0.450	1	1	07155	02	0	
	■ Plate for retrofitting	0.250	1	1	07155	03	0	
	■ Standard arm	0.500	1	1	07155	05	0	
	■ Sliding arm	0.500	1	1	07155	06	0	
	■ Kit of spare springs	0.500	1	1	07156	03	0	

The gate should never be left open, a child could

The CISA gate closer gives you peace of mind, as the gate automatically closes every time someone has gone through it, thanks to its special spring mechanism.



Gate always under control.

Combine CISA Elettrika with your gate closer. If the gate is not closed properly, an indicator on CISA Elettrika immediately lights up to warn you.

printed on FSC paper

N. B.:

- The products listed have all the characteristics indicated in the technical descriptions of CISA's catalogue, and it is advised to use them only as indicated. CISA does not guarantee any characteristics or use other than indicated.
For special security needs the end-user should contact the retailer / installer of such products, or contact CISA directly to agree on specific variations to best meet the user's needs.
- The measurements are given in millimetres.
- Weights refer to unit item, not to the package.
- To download the product certifications click on **www.cisa.com**

CISA S.p.A. reserves the right to modify products here illustrated without prior notice.

About Allegion™

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries.

For more visit allegion.com

