



CISA[®]

MULTITCP
MAX

ELETTRICA

Electric lock for aluminium
and steel doors



ALLEGION[™]



Multitop MAX Elettrica


Multipoint lock with 4 hook deadbolts for unbeatable security.

HIGH SECURITY

- Locking system with 4 hooks which are independent of the central lock mechanism and each other. If the central deadbolt or one of the hooks is forced, the other hooks remain securely engaged. CISA patented system.

CORRECTS HEAT DISTORTION OF THE DOOR

The rack mechanism, which makes it easier to turn the key, and the hooks with their more rounded design, effectively correct distortion of the door due to sudden changes in temperature.

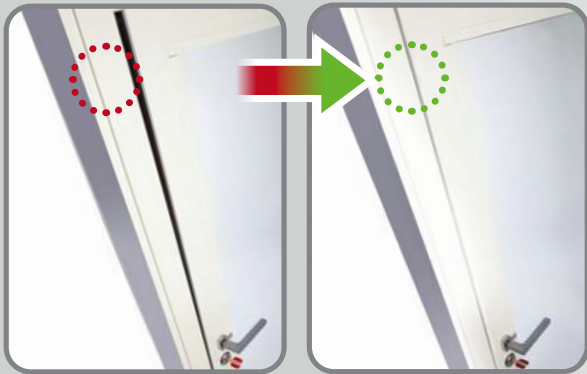

APPLICATIONS

- Entrance doors
- Secondary entrance doors
- Railings and shutters on French windows
- Sliding doors

BENEFITS



For end users

- High resistance to forced entry (2000 kg for lateral thrust and 1000 kg for forced entry by widening the profile).
- Energy savings and acoustic improvement.



For locksmiths

- Cuts maintenance times and costs.
- Can be installed on all kinds of doors, including railings.




For designers and architects

- Certified according to the European Standard prEN15685 and suitable for doors certified to EN1627 up to resistance class WK/RC 4.
- Can be built into master key systems for access management with a Euro profile cylinder.



MULTITOP MAX ELETTRICA




DEADLOCKING LATCHBOLT

When the door is closed the bolt retracts, deadlocking the latchbolt.

Benefit:

- Increased security for doors closed with latchbolt only.




COMPACT DIMENSIONS

- Thanks to its compact dimensions, Multitop MAX can replace any Multitop lock.

Benefit:

- Easily replaces previously installed Multitop locks.



SECURITY

- Locking system with four 10 mm thick hooks protected by a 4 mm thick hardened steel plate. CISA patent pending.

Benefit:

- High resistance to forced entry (2000 kg for lateral thrust and 1000 kg for forced entry by widening the profile).



CASE THICKNESS

The cases are 15.5 mm thick.


Benefit:

- Fewer holes are needed on the profile and the lock is correctly installed on thermal cut and European groove profiles.

CERTIFICATIONS

- In accordance with EN14486.
 - Grade 6 Security
 - Grade 7 Security using protective plates for the lock and divertors series 06436
- Suitable for doors certified to EN1627:1627 up to resistance class WK/RC4.


TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	kg	NO. PCS	ITEM		
									UNIT WEIGHT	NO. PCS	TYPE



CENTRE DISTANCE 85 MM

- 'U'-shaped adjustable faceplate 24 x 5 mm in **stainless** steel, 2300 mm high
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt
- 4 hooks with **hardened steel inserts**.
- Voltage 12 V AC CE.
- Absorbed current 3.1 A

3	2	85	24	25	3.520	1	1	19656	25	0
3	2	85	24	30	3.580	1	1	19656	30	0
3	2	85	24	35	3.640	1	1	19656	35	0
3	2	85	24	40	3.700	1	1	19656	40	0

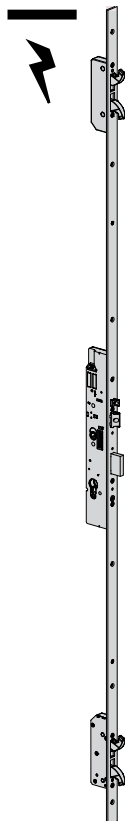

CENTRE DISTANCE 85 MM

- "Flat" adjustable faceplate 24 x 3 mm in **stainless** steel, 2300 mm high
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt
- 4 HOOKS WITH **hardened steel inserts**.
- Voltage 12 V AC CE.
- Absorbed current 3.1 A





3	2	85	24	25	3.520	1	1	19746	25	0
3	2	85	24	30	3.580	1	1	19746	30	0
3	2	85	24	35	3.640	1	1	19746	35	0
3	2	85	24	40	3.700	1	1	19746	40	0



TYPE	DESCRIPTION	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET			ITEM			
						UNIT WEIGHT	NO. PCS	TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Stainless steel faceplate 22 x 3 mm Deadbolt and latchbolt 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt Pair of nylon faceplate spacers item 1.06141.65.0 Threaded pins for fixing the extension bolts Voltage 12 V AC CE Absorbed current 3.1 A ON REQUEST <ul style="list-style-type: none"> Internal curved extension bolt rods item 1.06441.00.0 Internal straight extension bolt rods item 1.06441.10.0 Pair of external rod controls item 1.06442.00.0 Lateral locking points item 1.06443.41.0 Lateral locking points item 1.06443.46.0 	2	85	22	25	1.010	1	1	19225	25	0
		2	85	22	30	1.070	1	1	19225	30	0
		2	85	22	35	1.130	1	1	19225	35	0
		2	85	22	40	1.190	1	1	19225	40	0

TYPE	DESCRIPTION	FOR SERIES / ITEM			ITEM			
			UNIT WEIGHT	NO. PCS	TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Pair of lateral locking points operated by internal rods 4 hooks with hardened steel inserts Stainless steel faceplate 22 x 3 mm Closed case SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Pair of rods diameter 8 mm Pair of faceplate spacers item 1.06141.65.0 Rod guide item 1.06224.00.0 (2 pcs) ON REQUEST: <ul style="list-style-type: none"> Special strikers (see Vademecum) 	19225	1.000	1	1	06443	41	0
	<ul style="list-style-type: none"> Pair of lateral locking points operated by external rods 4 hooks with hardened steel inserts Stainless steel faceplate 22 x 3 mm Closed case SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Pair of external rod controls Pair of faceplate spacers item 1.06141.65.0 Pair of threaded pins ON REQUEST: <ul style="list-style-type: none"> Special strikers (see Vademecum) 	19225 49225 49250 49228 16200 46200 56000 57000 17000	0.766	1	1	06443	46	0

ADJUSTABLE METAL STRIKERS FOR USE WITH MULTITOP MAX LOCKS

Striker for locks (order 1 pc)	Striker for top/bottom locking points (order 2 pcs)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.67.0	1.06465.57.0
1.06463.68.0	1.06465.58.0
1.06463.82.0	1.06465.72.0
1.06463.83.0	1.06465.73.0
1.06463.84.0	1.06465.74.0
1.06463.85.0	1.06465.75.0
1.06461.34.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

TYPE	DESCRIPTION	UNIT WEIGHT kg	NO. PCS	ITEM			
				TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Lock protective plate to increase drill resistance (grade 7 prEN 15685 : 10) 	0.100	6	1	06436	10	0
	<ul style="list-style-type: none"> Protective plate for lateral locking points to increase drill resistance (grade 7 prEN 15685: 10) 	0.057	6	1	06436	11	0
	<ul style="list-style-type: none"> Microswitch for hooks status, to be used with lateral locking points series 19000 and 49000 	0.020	1	1	06195	08	0
	<ul style="list-style-type: none"> Protective rose for cylinders RS3, ASTRAL, AP3 (with long key, CL special execution), AP4 and ASIX, in chrome-plated carbonitrided steel for 19000 and 49000 series, complete with: <ul style="list-style-type: none"> - Spacers 2 mm (19 pcs), 1 mm (2 pcs) - M5 x 75mm screws - Inside escutcheon FINISHES <ul style="list-style-type: none"> - Gold polished steel (fin. 15) ON REQUEST <ul style="list-style-type: none"> - Pair of additional spacers for 65 to 87 mm wide profiles item 1.06141.87.0 	0.485	1	1	06460	05	0

TYPE	DESCRIPTION	FOR SERIES / ITEM	UNIT WEIGHT kg	NO. PCS	ITEM			
					TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 7.5 to 10 mm) 	106463 24 0; 106463 25 0; 106463 34 0; 106463 35 0	0.019	25	1	06141	79	0
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm) 	106463 24 0; 106463 25 0; 106463 34 0; 106463 35 0	0.019	25	1	06141	89	0

TECHNICAL FEATURES

- Case thickness 15.5 mm
- Closed case
- Backset 25-30-35-40 mm
- Centre distance 85 and 92 mm
- Case in pressure die-cast metal
- Steel cover
- Top and bottom adjustable faceplate
- 10.5 to 16.5 mm adjustable latchbolt and deadbolt
- Latchbolt with anti-burglary device
- 10 mm thick hooks with 25 mm protrusion
- Protective plate for grade 7 item 1.06436.10/11.0
- Pre-set for installation of microswitch on the diverter case
- 8 mm square spindle
- DIN holes to fix the handle plate
- Voltage 12 V AC CE

OPERATION

- The key activates the latchbolt, the central deadbolt and the hooks. The remote electric control and the handle operate the latchbolt
- The lock is equipped with a misalignment device

FINISHES

- Zinc-plated cases and covers
- STAINLESS steel faceplate
- Nickel-plated latchbolt, deadbolt and hooks

HAND



0 = non-handed

SUPPLIED AS STANDARD


- Pair of nylon roses item 1.06012.01.0.
- Lock and cylinder fixing screws
- Instruction sheet

ON REQUEST

- Euro profile cylinder
- Adjustable metal strikers (see special Vademecum)
- Cylinder protective rose item 1.06460.05.0
- Button item 1.06110.15.0
- Pair of electrical contacts item 1.06511.00.0

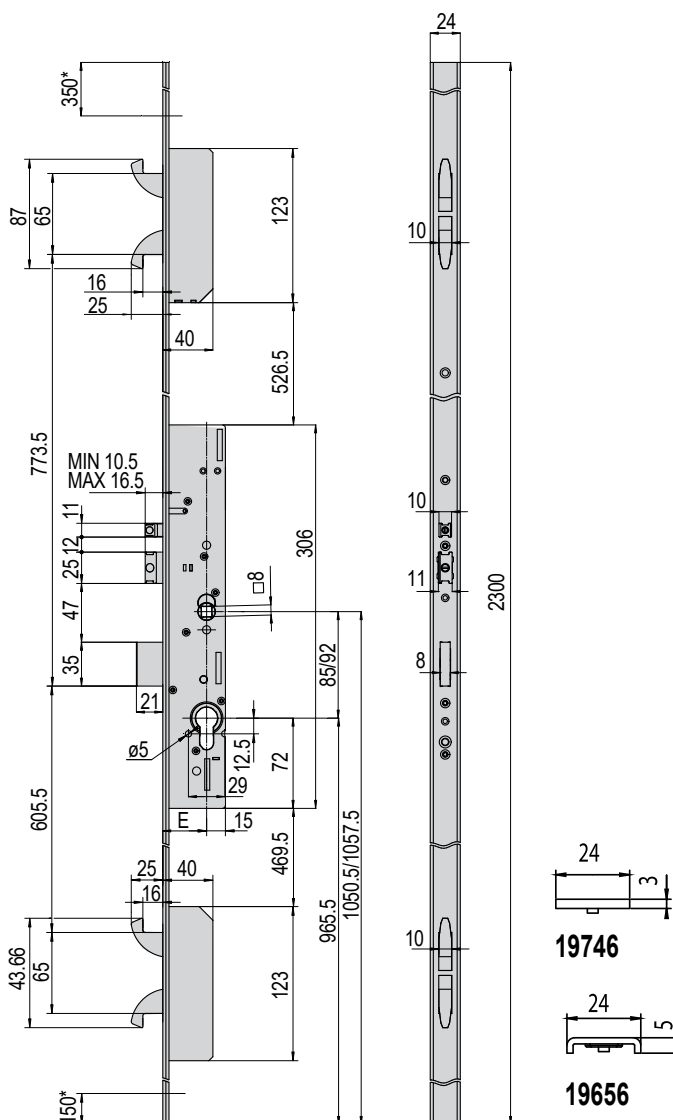

* RASABILITÀ
E = 25 - 30 - 35 - 40

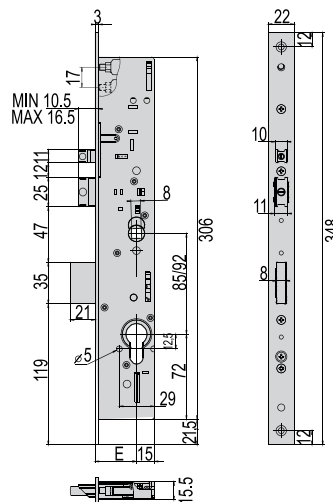


19225
E = 25-30-35-40


About Allegion

Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions.





For more, visit allegion.com.



 CISA SpA
Via Oberdan 42
48018 Faenza (RA) Italy

 Ph. +39 0546 677111
Fax +39 0546 677150

 Customer Service and Technical Support
+39 0546 188 0070

    cisa.com
cisa.sales@allegion.com